



A Higher Quality

HeatLink Potable Water Press System





Not all plumbing systems are created equal...

The HeatLink Potable Water Press System is designed for superior results, using only the *highest quality* components to help ensure long-term reliability for all of your installations.

- Clean & non-toxic
- Resists scaling & corrosion
- Quiet – no water hammer noise
- Equalized pressure drops, minimize hot or cold surges
- Durable
- Fast & reliable installation for lower costs
- Low friction losses
- Meets or exceeds all applicable North American standards* including:
 - » Domestic hot water continuous recirculation
 - » CAN/ULC S102/2010 and ASTM E84 plenum acceptance
- Flexible tubing means fewer fittings
- Discreet red/blue identification on PEX tubing
- Freeze resistant
- UV stabilized & chlorine resistance
- **25 year system warranty**
- Connections can be verified visually
- Hand and power press tools available from HeatLink
- ½" to 2" sizes available
- ½" to 1" sizes available in solid color

*For complete listings and standards, see individual product submittals.

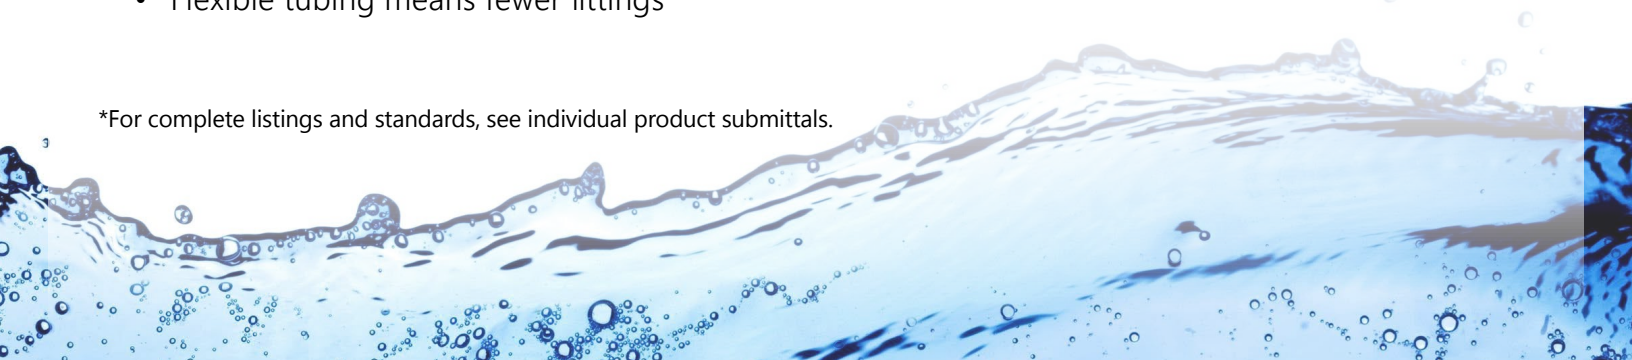

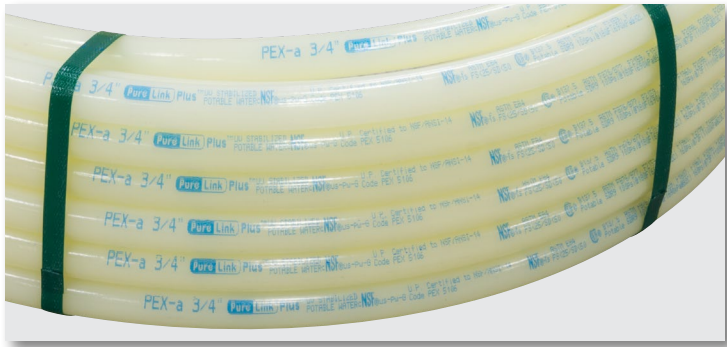


PEX-a Tubing

The unique crosslinking method HeatLink uses to manufacture our PEX-a gives our tubing significantly improved material properties over other plumbing materials, including:

- Flexibility
- Shape memory for easy repairs
- Immediate pressure testing of system
- Lower cost installation
- Durability
- Chemical resistance¹

You need reliable tubing to complete each and every job to your high expectations, and we know that North American made HeatLink PEX-a tubing is the right product for you!

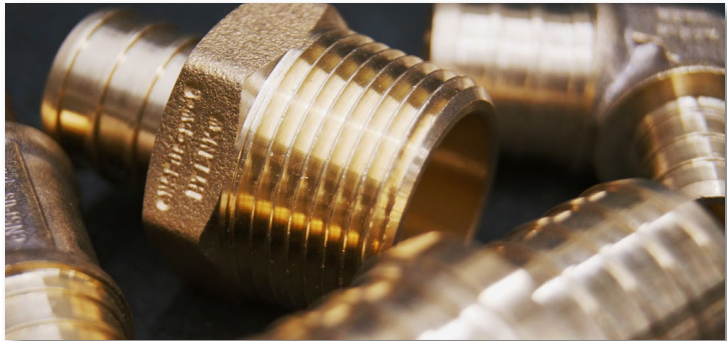

No Lead Brass Fittings

HeatLink uses only high quality C69300 ECO brass for all of our F1807 fittings for superior performance and reliability on all of your plumbing projects, and include:

- **Excellent dezincification resistance**
- **Corrosion resistance to chemicals found in water and gas**

Some of the standout features of ECO Brass include:

- Strength equal to stainless steel
- Physically robust for use in severe installation environments
- Wear and corrosion resistance equivalent to commercial bronze
- Resistant to common construction chemicals such as primer and spray foam²
- Lead-free, arsenic free & bismuth free (compliant with S.3874 Reduction of Lead in Drinking Water Act)
- EPA registered antimicrobial alloy

¹ Always consult the technical data sheet for up to date info on chemical resistance and ratings.

² Note: Use caution as PEX-a tubing/expansion rings and other components will/may still react to these chemicals - use pipe-in-pipe for spray foam installations.



Stainless Steel Press Sleeves

Used for decades worldwide in the plumbing industry, and originally designed for hydraulics and pneumatics, press sleeves have long been a reliable and easy to use on all potable applications.

HeatLink Stainless Steel Press Sleeves:

- **Use controlled hardness specification for consistent presses**
- Allow for easy visual inspection of connections
- Create quick connections for faster installs
- Press with available HeatLink press tools
- Allow for immediate pressure testing
- Lower cost of installation



HPP Fittings

HeatLink HPP fittings are made using polyphenylsulfone (PPSU), the highest performing of the polysulfones, giving you long term reliability and stability over lower cost/quality options for all of your potable water installations.

Some of the defining characteristics of our HPP fittings include:

- **Better chemical resistance than other manufacturers**
- Heat stability across a wide range of temperatures
- High continuous temperature use
- Exceptional hydrolytic stability
- High burst pressure rating
- Erosion resistant - can withstand aggressive water conditions
- Outstanding resistance to hot chlorinated water