DELETING THE REPEATER FROM THE NETWORK









J.

After you have deleted the repeater from the ZigBee network, it will need to be re-installed. Also, if you delete the repeater, all the thermostats connected to the repeater will lose their connection to the network.

Product Compliance & Safety Info

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver. · Connect the equipment into an outlet on a circuit different from
- that to which the receiver is connected. · Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- This device complies with Industry Canada's licence-exempt RSSs. Operation is subject to the following two conditions:
- (1) This device may not cause interference; and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Warning

These instructions are applicable to the SALUS model stated on this instruction guide.

This product must be fitted by a competent person, and installation must comply with the guidance, standards and regulations applicable to the city, country or state where the product is installed. Failure to comply with the requirements of the relevant guidance, standards and regulations could lead to injury, death or prosecution.



Always isolate the AC Mains supply before installing or working on any components that require 120 V 60Hz supply.

We hope you enjoy this product...

TECHNICAL DETAIL

WARRANTY

Model	AE10RF
Туре	ZigBee Repeater
Function	Zigbee network coordinator for Wyse.ly system
Control	Open - Close the ZigBee network
Indication	Bi-Colour LED: RED - AMBER
User Interface	Single push button
Operating Temperature	0 to 45 °C
Storage Temperature	-20°C to 60°C
Frequency	2.45 GHz
Power Source	24V 50/60Hz via mains adaptor (supplied)
Approval	FCC and IC

SALUS North America warrants that this product will be free from any defect in materials or workmanship, and shall perform in accordance with its specification, for a period of five years from the date of installation. SALUS North America sole liability for breach of this warranty will be (at its option) to repair or replace the defective product.

Customer Name:
Customer Address:
Post Code:
Tel No: Email:
Engineers Company:
Tel No: Email:
Instalation Date:
Engineers Name:
Engineers Signature:



INSTALLER / USER MANUAL

SALUS North America

850 Main Street Redwood City CA 94063

T: +1-650-360-1725 E: sales@salusna.com

www.salusna.com




SALUS North America is a member of the Computime Group

Maintaining a policy of continuous product development, SALUS Controls plc reserves the right to change specification, design and materials of products listed in this brochure without prior notice.

For PDF Installation guide go to www.salusna.com



SYSTEM OVERVIEW

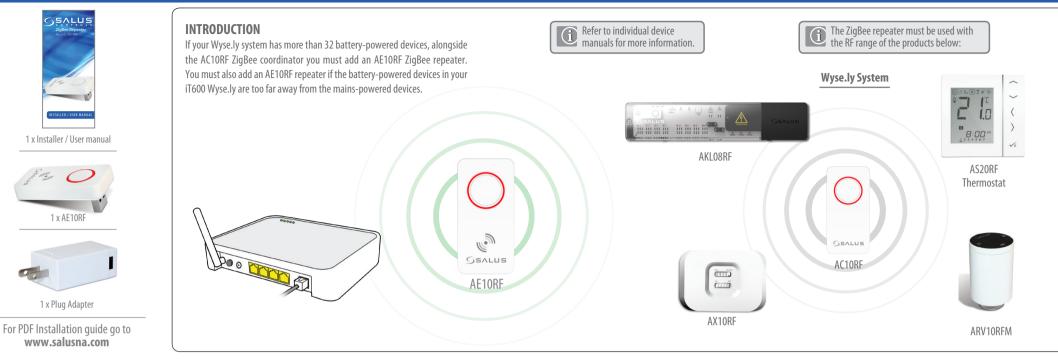

INSTALLATION



Press and hold the button on the Coordinator for five seconds to enter pairing mode. The LED flashes red.

Plug the repeater into the mains

power. The button flashes red.



Press and release the repeater button. The LED goes solid red to show it is connected to the network.



7 Th co bu fiv m

The system installation is now complete. Press and hold the button on the Coordinator for five seconds to close pairing mode. The LED goes solid red. Also refer to the coordinator and individual device manuals.

