




Outdoor Sensor

Standard 2-wire to be run from side of building (outside wall location; *preferable location to be on the same side of the building where the main occupied rooms are and not near any windows, ventilation openings, or artificial heat sources!*) back to mechanical room.

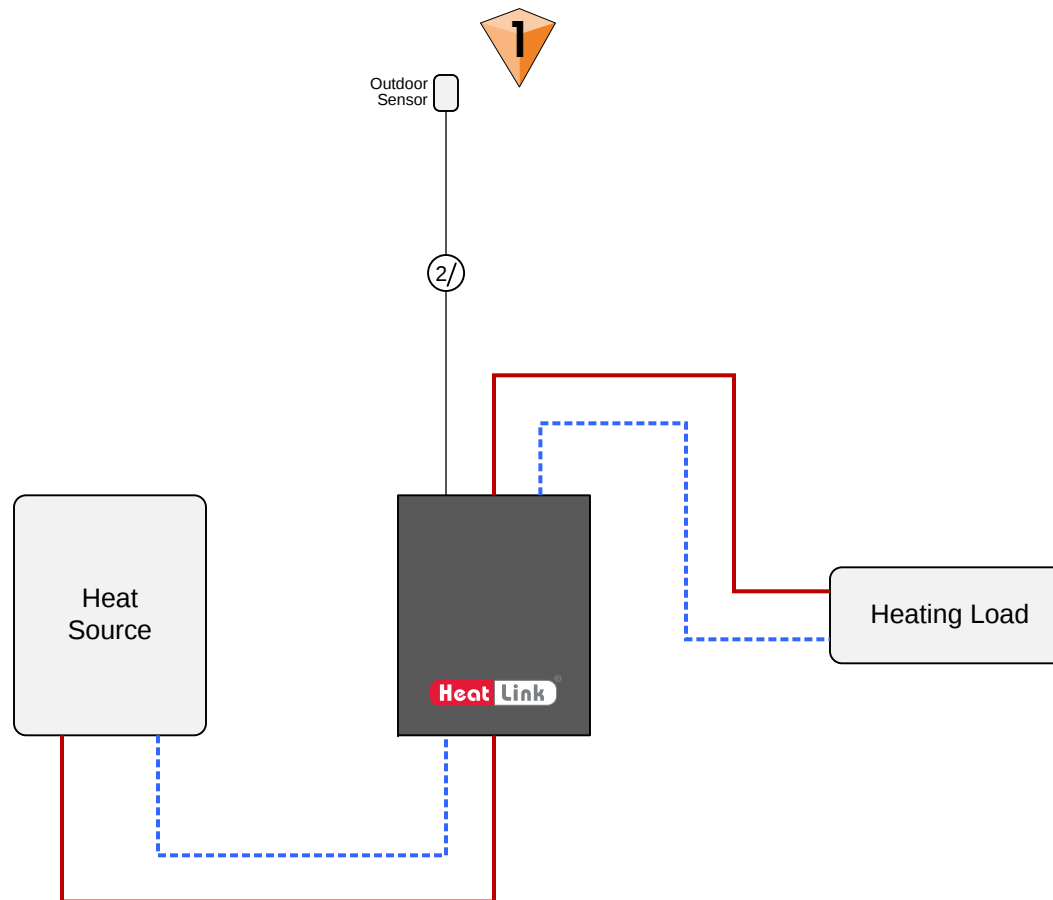

www.heatlinkgroup.com
1-866-661-5332

Notes:

- Drawings are for HeatLink suggested electrical schematics only! User must determine if electrical schematic will work for their particular application. User must also confirm all HeatLink schematics with manufacturer schematics of each particular control chosen.
- In all cases manufacturer equipment schematics will take precedence over HeatLink electrical schematics.
- Local codes, regulations, and authorities have final jurisdiction.

Application: Rough-in Wiring for Outdoor Sensor

Date: 2013-05-14

Schematic #: SCH-MRIB-R007