

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :


Description

The Power Press Tool is a battery powered hydraulic pressing tool for up to 1-½" SS press sleeves. Comes with one 18V 1.3Ah Li-ion battery, battery charger, and hard plastic case. Jaws for the Power Press Tool are sold separately.

Technical Data

Pressing time:..... 3-4 s
 Thrust force (linear): 15 kN min.
 Battery voltage:..... 18V
 Battery capacity:..... 1.3 Ah Li-Ion (Makita BL1815) or
 3.0 Ah Li-Ion (Makita BL1830)
 Battery charging time:..... 15 min. (Makita BL1815) or
 22 min. (Makita BL1830)
 Presses/charge:..... ~150× ½", ~50× 1½" (Makita BL1815)
 ~300× ½", ~100× 1½" (Makita BL1830)
 Ambient temperature:..... 14 to 104°F (-10 to 40°C)
 Hydraulic oil:..... Rivolta S.B.H. 11
 Sound level:..... < 70 dB (A) at a distance of 3.3 ft (1 m)
 Vibrations:..... < 2.5 m/s²

Qty	Stk. #	Weight
	11500	3.74 lb (1.7 kg)

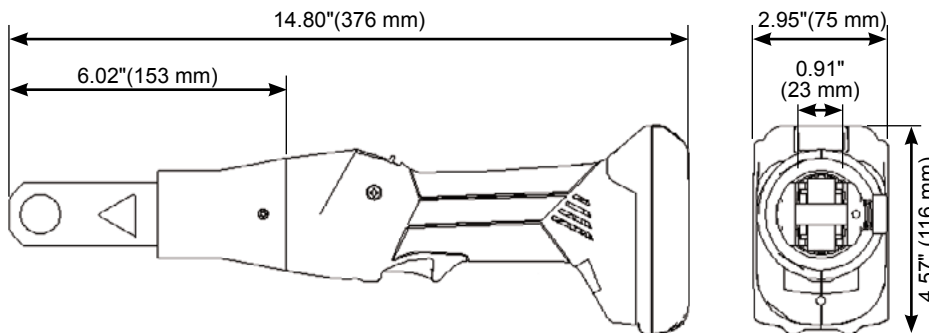

Installation

Installation of the stainless steel press sleeves must follow all of HeatLink's instructions and guidelines, found in the Potable Water Systems Installation Guide.

Related Documents

- Slim-line Power Press Tool Instructions (L611500)
- Potable Water Systems Installation Guide (L3235)
- HeatLink Limited Plumbing Warranty

This page is intentionally blank.