

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :


Description

Mixing Valve Motor controlled by a 3-point signal to operate rotary 4-way (64164, 64166, 64181, 65000) flange mixing valves. Motor is reversible and is provided with limit switches which are actuated by cam discs. Comes with auxiliary contact activated by adjustable cam. The valve can be manually operated by pushing the manual button and using the lever.

Technical Data

Ambient Temperature: 23 to 131°F (-5 to 55°C)
 Power Supply: 24Vac ± 10%, 50/60 Hz
 Enclosure Rating: NEMA 13, IP 54
 Protection Class: II
 Torque:..... 135 in. lb (15 Nm)
 Power Consumption: 2 VA
 Angle of Movement:..... 90° factory set
 (adjustable 30° to 180°)
 Running Time 90°: 100 sec
 Auxiliary Switch: max. 2A
 Control Signal 3-point SPDT

The motor should be preceded by a multi-pole contact breaker in the fixed installation.

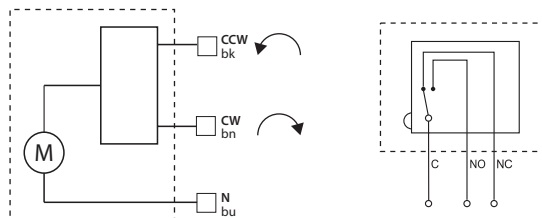

CE LVD 2006/95/EC
 EMC 2004/108/EC
 RoHS 2002/95/EC

Auxiliary switch
 To set the switch position, remove the actuator cover and turn the cam sleeve to the desired position.

Qty	Stk. #	Weight
	58200	1.76 lb (0.8 kg)

Installation

Installation must follow all of HeatLink's instructions and guidelines, including those in the installation instructions.

Related Documents

- HeatLink Limited Heating Warranty

