

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

**Description**

Provides on/off or modulated flow control with bypass for manifolds or miscellaneous supplemental heating units. Fitted with three 1" sweat unions.


**Technical Data**

Material - Housing: ..... Bronze  
 Material - Spindle:..... Stainless steel  
 Spindle Sealing:..... 2 o-rings  
 Material - Nipples..... Brass  
 Max. Operating Temperature..... 100°C / 212°F  
 Max. Operating Pressure..... 10 bar / 145 psi

**Standards / Listings**

n/a

Qty	Stk. #	Dimension					Cv	Kvs	Weight
		A	B	C	D	E			
	63025	1" Female Sweat	5-5/16" 135 mm	1-1/2" 37.5 mm	2-7/8" 72.5 mm	2-1/8" 54 mm	6.0	5.12	2.61 lb 1.16 kg

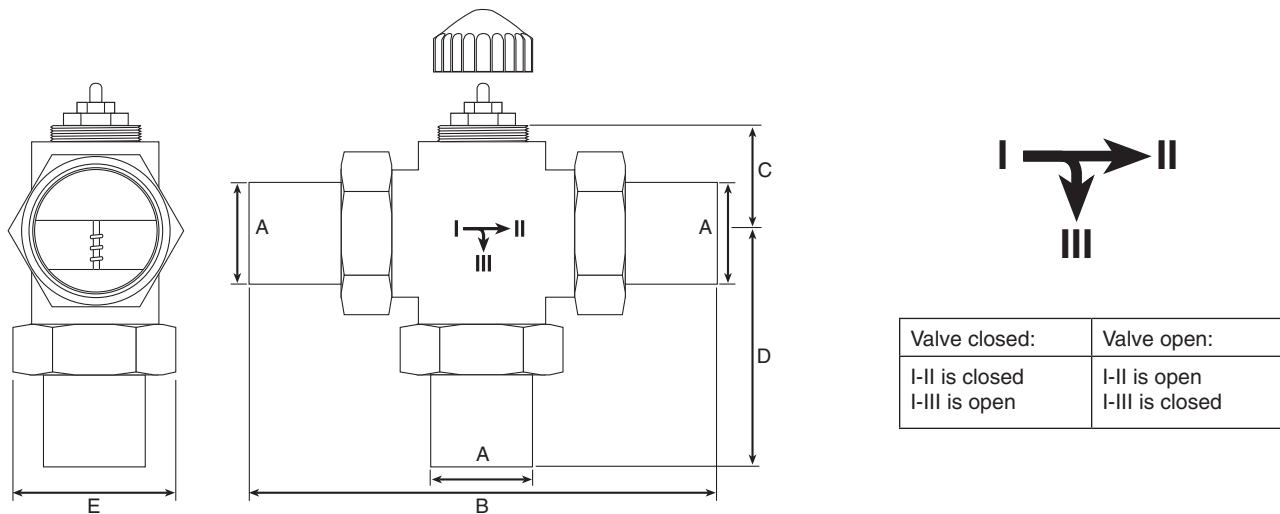

**Installation**

Installation must follow all of HeatLink's instructions and guidelines, including those in the installation instructions.

**Related Documents**

- Compact Mixing Valve Installation Instructions (L663025)
- Component Warranty