

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

Solid brass fitting attaches to the end of the PEX tubing and allows for easy installation onto the bottom of the manifold.


Technical Data

Material..... Brass
 Material - Nut..... Nylon / Glass
 Max Working Pressure:..... 100 psi @ 180°F (6.9 bar @ 82.2°C)
 Tested Pressure..... 232 psi @ 180°F (16 bar @ 82.2°C)
 Operating Temperature..... 160°F (70°C)
 Maximum Temperature..... 180°F (82°C)
 Minimum Temperature* -65°F (-54°C)

Standards / Listings

n/a

Pair Qty	Pipe Size	Stk. #	Dimension		Weight
			A	B	
	3/8"	77012	n/a	n/a	3.5 oz 100 g
	1/2"	77005	n/a	n/a	3.5 oz 100 g
	5/8"	77019	n/a	n/a	3.5 oz 100 g
	3/4"	77022	1- ¹¹ / ₁₆ " (43 mm)	1- ³ / ₁₆ " (30 mm)	5.3 oz 150 g

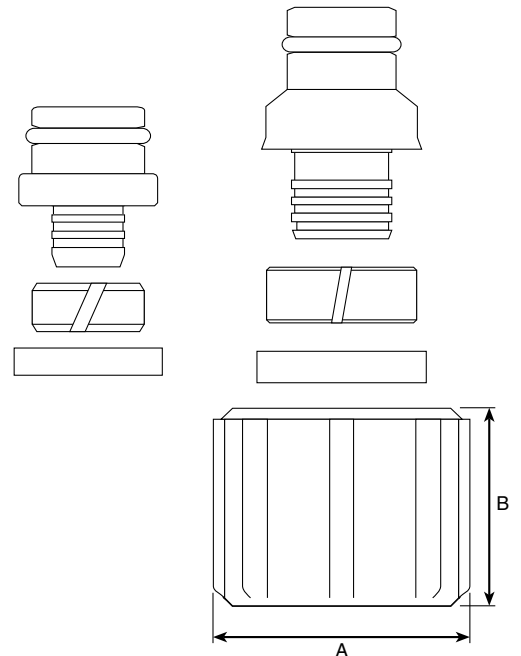

Installation

Installation of TwistSeal[®] manifolds must follow all of HeatLink's instructions and guidelines, including those in the Assembly Kit Instructions.

Related Documents

- TwistSeal[®] Mini Assembly Instructions (L679200)
- TwistSeal[®] Assembly Instructions (L679400)
- HeatLink Limited Heating Warranty