

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :


Description

This plating is used to provide a direct transfer and heat distribution from the PEX tubing to a wooden subfloor. They can be stapled to the underside of the subfloor in a DryBelow™ system or used above the subfloor in a DryAbove™ system.

Technical Data

Material:..... Aluminum
Thickness: 0.015"

Qty (ea)	Stk. #	Dimensions			Piece Weight	# in Bundle	Bundle Weight	# in Box	Box Weight
		A	B	C					
	87024	24" (610 mm)	4 ¼" (108 mm)	5/8" (16 mm)	0.17 lb 78 g	50	8.6 lb 3.9 kg	250	43 lb 19.5 kg

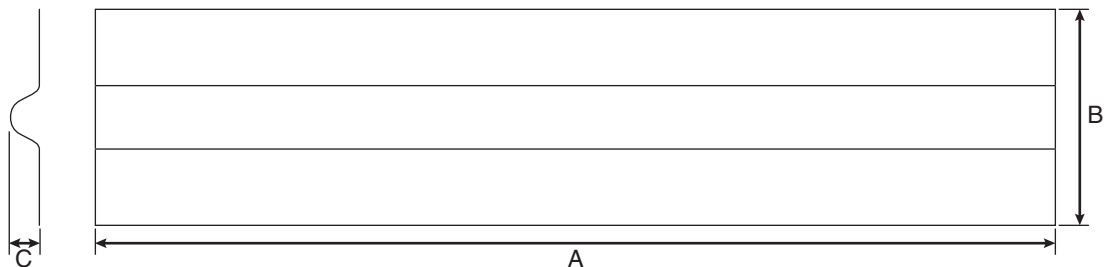

Installation

Installation must follow all of HeatLink's instructions and guidelines, including those in the Installation Guide.

Related Documents

- HeatLink Installation Guide (L3390)
- HeatLink Limited Heating Warranty

This page is intentionally blank.