

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

Pipe tracking provides even pipe spacing and exact regulation of pipe heights. They can be fastened to many surfaces, such as concrete or plywood subfloors, steel Q decking, and polystyrene insulation. Tracking permits pipe spacing in 3" (76mm) increments.


Technical Data

Material:..... Polypropylene

Standards / Listings

n/a

Qty (ft)	Stk. #	Piece Length	Piece Weight	Bundle Qty	Bundle Weight	Box Qty	Box Weight
	89000	4' 1.22 m	0.44 lb 0t.2 kg	25 x 4' (1.22 m) = 100' (30.5 m)	11 lb 5 kg	100 x 4' (1.22 m) = 400' (122 m)	44 lb 20 kg

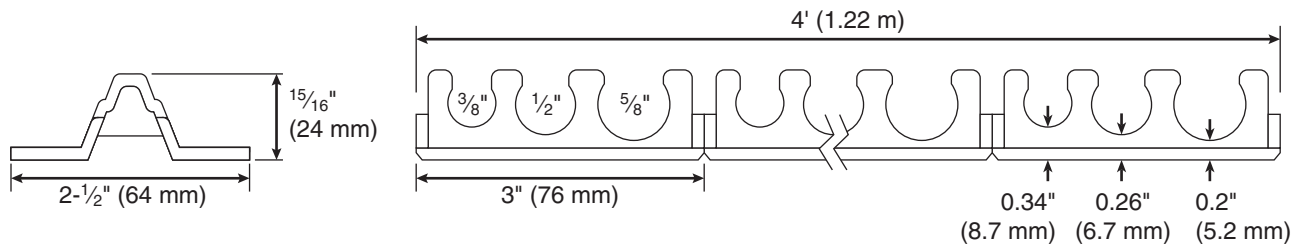

Tracking Staples

Staples are used to fasten pipe tracking to polystyrene insulation. The hooks on the ends ensure the staple will not loosen prior to topping pour.

Installation

Installation must follow all of HeatLink's instructions and guidelines, including those in the Installation Guide.

Technical Data

Material:..... Polystyrene

Bag Qty	Stk. #	# per bag	Weight
	89010	500	1.75 lb 800 g

Related Documents

- HeatLink Installation Guide (L3390)
- Component Warranty

