

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

### Description

Closed one end and 3/4" PEX insert on the other end. 1/2" branches in single row.

### Technical Data

Material:..... Modified Polyphenylsulfone  
 Operating Pressure Rating:..... 180°F @ 100 psi (82.2°C @ 0.69 MPa)

### Listings

ICC-ES PMG 1087  
 cNSFus-pw  
 cQAlus P371

### Standards

ASTM E84  
 ASTM F877  
 ASTM F2159  
 CSA B137.5  
 NSF/ANSI 14  
 NSF/ANSI 61  
 NSF/ANSI 372  
 ULC S102.2

### Codes

IMC  
 IPC  
 IRC  
 NPC of Canada  
 NSPC  
 UMC  
 UPC


Qty	Stk. #	# of ports	Dimensions		Weight
			Inlet	Outlet	
	13202M	2	3/4"	closed	3.502" (89.0 mm) 0.036 lb (0.016 kg)
	13203M	3	3/4"	closed	5.252" (133.4 mm) 0.054 lb (0.024 kg)
	13204M	4	3/4"	closed	7.002" (177.9 mm) 0.072 lb (0.033 kg)

### Installation

Installation must follow all of HeatLink's instructions and guidelines.

### Related Documents

- PEX-a Potable Water Press System Installation Guide (L3235)
- HeatLink Limited Plumbing Warranty

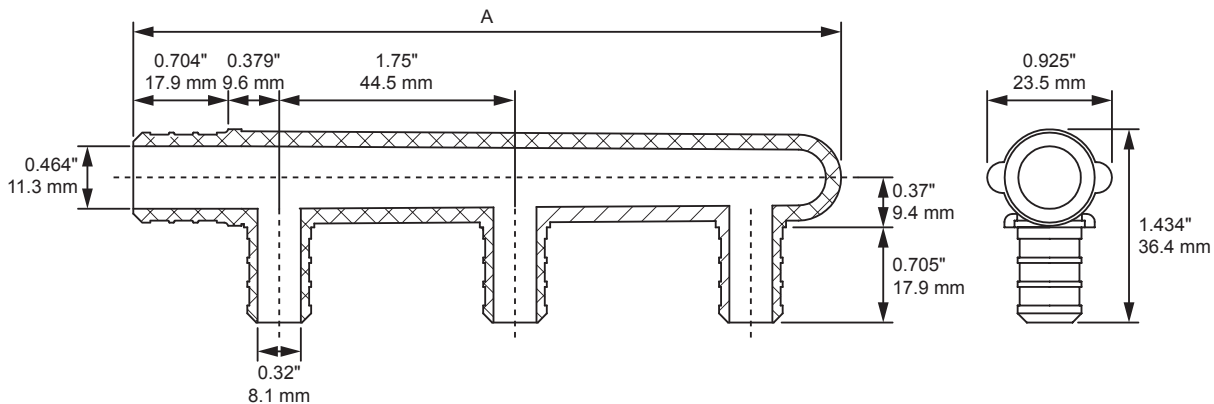

*This page is intentionally blank.*