

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :


Description

High Performance Polymer PEX insert plugs.

The use of PEX tubing in a potable hot-water plumbing system with an operating temperature above 140°F (60°C) or system pressure above 80 psig (550 kPaG) or highly aggressive water quality or any combination thereof can significantly reduce the service life of the tubing.

HeatLink requires following the guidelines described in Plastics Pipe Institute TN-53, Guide to Chlorine Resistance Ratings of PEX Pipes and Tubing for Potable Water Applications and HeatLink INFO 37, Domestic Hot Water Recirculation Systems.

Qty	Stk. #	Size	Dimensions					Weight
			A	B	C	D	ID	
	15005	½" PEX	0.71" (36.5mm)	0.12" (4.0mm)	0.76" (19.3mm)	0.56" (14.2mm)	0.32" (24.6mm)	0.005 lb (0.002 kg)
	15022	¾" PEX	0.71" (18.0mm)	0.12" (3.0mm)	0.95" (24.2mm)	0.75" (19.2mm)	0.46" (11.8mm)	0.097 lb (0.003 kg)
	15028	1" PEX	0.86" (21.8mm)	0.12" (2.9mm)	1.14" (29.0mm)	0.94" (23.9mm)	0.61" (15.6mm)	0.044 lb (0.006 kg)

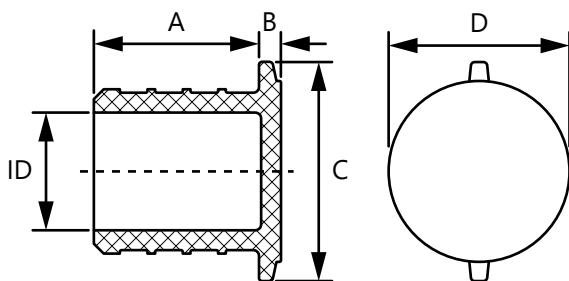

Technical Data

Specifications	
Material	Modified Polyphenylsulfone
Operating pressure rating	180°F @ 100 psi (82.2°C @ 0.69 MPa)

Listings
ICC-ES PMG 1087
cNSFus-pw
cQAlus P371
U.P. Code

Codes
IMC
IPC
IRC
NPC of Canada
NSPC
UMC
UPC

Standards
ASTM E84
ASTM F877
ASTM F2159
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372
ULC S102.2

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- PEX-a Potable Water Press System Installation Guide (L3235)
- HeatLink Limited Plumbing Warranty