

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

No lead brass 1/2" PEX x 3/8" O.D. compression, nickel plated straight ball valve.

Technical Data

Material:..... No Lead (Eco) Brass - C69300
 Working Pressure:..... 100 psi maximum
 Tested Pressure:..... 100 psi
 Maximum Temperature:..... 82°C / 180°F

Listings


IAPMO UPC
 CSA

Standards

ANSI/NSF 61
 ANSI/NSF 372
 ASME A112.18.1/CSA B125.1
 ASTM F1807
 ASTM F877

Qty	Stk. #	Size	Dimension			Approx Cv	Weight
			A	B	ID		
	23505NL	1/2" PEX x 3/8" O.D.	2.5" (63.5mm)	1.2" (30.4mm)	0.35" (8.9 mm)	3.0	3.31 oz (94.0 g)

Dimensional Diagram

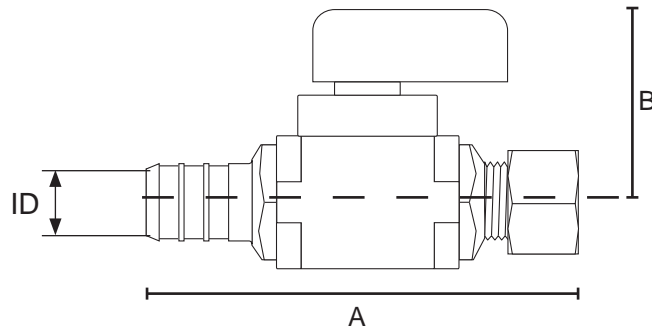

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- HeatLink Limited Plumbing Warranty

This page is intentionally blank.