

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :


Description

No lead brass $\frac{3}{4}$ " PEX F1807 \times $\frac{3}{4}$ " MNPT full port straight ball valves with butterfly handle.

Dimension, in/(mm)									
Qty	Stk. #	Size	A	B	C	D	E	ID	Weight, lb/(kg)
	23822NL	$\frac{3}{4}$ " MNPT x PEX	1.22 (31)	2.35 (59.9)	2.24 (56.8)	2.85 (72.3)	1.18 (30)	0.53 (13.5)	0.49 (0.220)

Technical Data

Specifications	
Materials	
Body	No Lead (C46500) Brass
Seat	PTFE
Ball	Stainless steel
Packing	PTFE
O-ring	NBR
Stem	Brass
Handle nut	Plated steel
Lock washer	Plated steel
Handle	Aluminum alloy
Packing nut	Brass
Cap	No Lead (C46500) Brass
Operating pressure rating	180°F @ 100 psi (82.2°C @ 0.69 MPa)

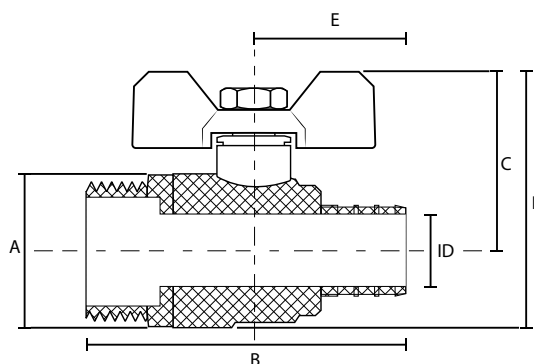

Listings

IAPMO cUPC

Codes

UPC

NPCC

Standards

ASTM F1807 compliant

IAPMO/ANSI Z1157

NSF/ANSI 14

NSF/ANSI 61

NSF/ANSI 372

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- HeatLink Limited Plumbing Warranty