

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

Solid no lead brass PEX insert × FNPT adapters.

Listings

cNSFus-pw

Standards

ASTM F877
ASTM F1807
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372


Technical Data

Material:..... No Lead (Eco) Brass - C69300
Operating Pressure Rating:..... 180°F @ 100 psi (82.2°C @ 0.69 MPa)

Codes

IAPMO UPC

Dimensional Diagram

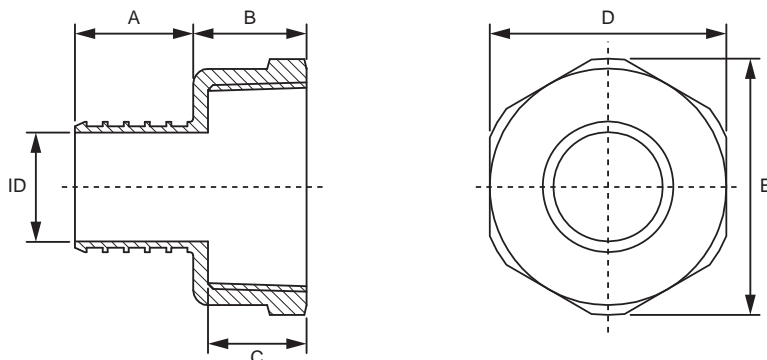

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- HeatLink Limited Plumbing Warranty

Qty	Stk. #	Size	Dimension, in / (mm)					ID	Weight, lb / (kg)
			A	B	C	D	E		
	27605NL	½" PEX × ½" FNPT	0.63 (16.0)	0.71 (18.0)	0.59 (15.0)	0.98 (25.0)	1.12 (28.5)	0.35 (8.9)	0.086 (0.039)
	27622NL	¾" PEX × ¾" FNPT	0.63 (16.0)	0.73 (18.5)	0.59 (15.0)	1.22 (31.0)	1.40 (35.5)	0.53 (13.5)	0.134 (0.061)
	27628NL	1" PEX × 1" FNPT	0.81 (20.5)	0.85 (21.5)	0.75 (19.0)	1.50 (38.0)	1.69 (43.0)	0.71 (18.0)	0.207 (0.094)
	27632NL	1 ¼" PEX × ¾" FNPT	0.94 (24.0)	0.73 (18.5)	0.63 (16.0)	1.22 (31.0)	1.40 (35.5)	0.87 (22.1)	0.154 (0.070)
	27638NL	1 ¼" PEX × 1" FNPT	0.94 (24.0)	0.85 (21.5)	0.75 (19.0)	1.50 (38.0)	1.69 (43.0)	0.87 (22.1)	0.223 (0.101)
	27635NL	1 ¼" PEX × 1 ¼" FNPT	0.94 (24.0)	0.91 (23.0)	0.79 (20.0)	1.89 (48.0)	2.05 (52.0)	0.87 (22.1)	0.344 (0.156)
	27641NL	1 ½" PEX × 1 ½" FNPT	1.15 (29.2)	1.15 (29.3)	1.02 (26.0)	2.24 (57.0)	2.56 (65.0)	1.04 (26.5)	0.756 (0.343)

This page is intentionally blank.