

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

Copper stub-out elbow allows for 90° transitions between fixtures and wall cavities.

The use of PEX tubing in a potable hot-water plumbing system with an operating temperature above 140°F (60°C) or system pressure above 80 psig (550 kPaG) or highly aggressive water quality or any combination thereof can significantly reduce the service life of the tubing.

HeatLink requires following the guidelines described in Plastics Pipe Institute TN-53, Guide to Chlorine Resistance Ratings of PEX Pipes and Tubing for Potable Water Applications and HeatLink INFO 37, Domestic Hot Water Recirculation Systems.

Qty	Stk. #	Connection	Nom. Tube Size	Weight
	28206	½" PEX	½"	0.216 lb (98 g)


Technical Data

Material

Specifications

Type L copper

Dimensional Diagram

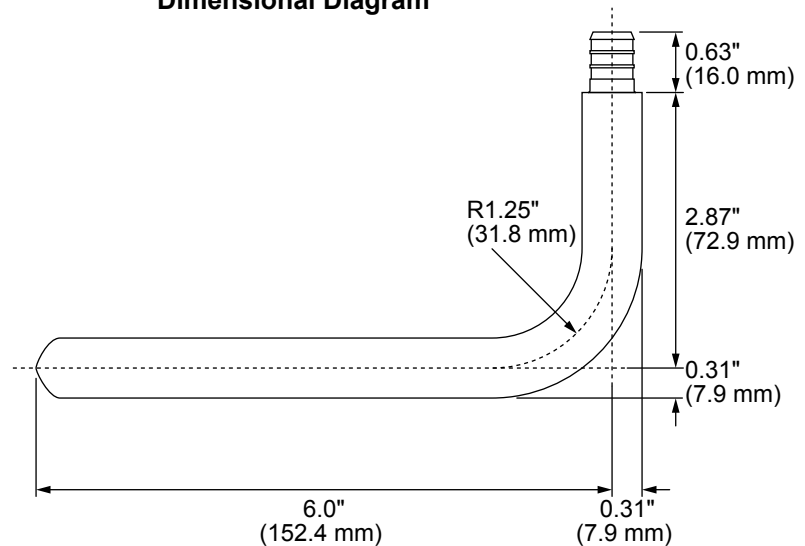

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

HeatLink Limited Plumbing Warranty

Listings
cNSFus-pw

Codes
IAPMO UPC

Standards

ASTM B88
ASTM F1807
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61