

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

The HeatLink® 40414 StatLink 4-Zone Wired Module is complete with all main electrical connections for a hydronic floor heating system. The module can be mounted either on a DIN rail or directly to a wall. It connects room thermostats to their corresponding actuators.

Features:


- Can be used with 2-wire actuators (HeatLink 56200 series), or 4-wire actuators with end switch (HeatLink 56230 series).
- Jumpers can be used to increase the number of actuators (2-wire) per zone to 3.
- One set of dry contacts for pump/boiler activation.
- LED status indicators.

Qty	Stk. #	Weight
	40414	0.60 lb (0.27 kg)

Technical Data

	Specifications
Indicators	1x Power LED 4x Zone LED
Zones	4
Actuators (per zone)	Up to 3 (max 2 VA each)
Actuators (total)	Up to 12 (24 VA total)
Actuator Terminal Max Draw	1A, 24Vac
Thermostat Terminal Max Draw	40 mA, 24Vac
Recommended 24 VAC Transformer	40 VA
Internal Fuse	5A
Dry contacts	1

Dimensions

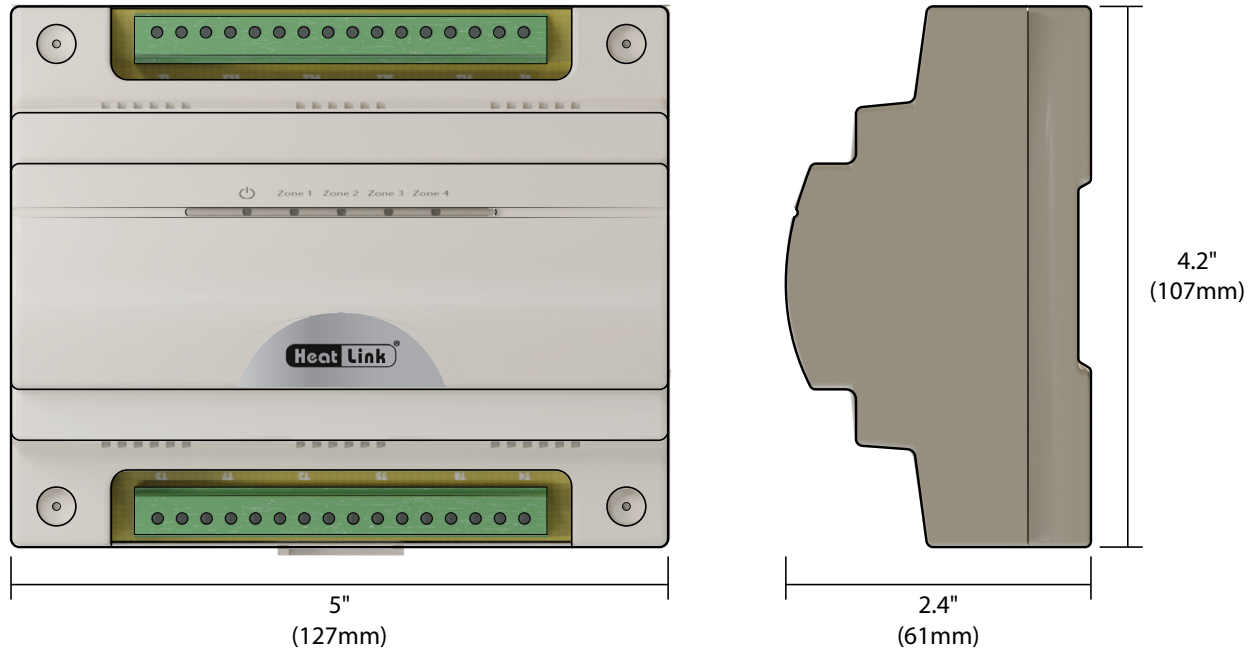

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Maintenance

Maintenance must follow all of HeatLink's instructions and guidelines.

Related Documents

- Operation and Maintenance Manual (L640414)
- HeatLink Limited Heating Warranty