

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

### Description


Allows easy access to the manifold through a locking, removable, vented door. Satin coat steel is well suited for painting. Comes with one key lock and one or two coin/screwdriver locks per door. Space is available for mounting a StatLink® module above the manifold.

Skirting (if required) by others.

Qty	Stk. #	A	B	C	Dimension		D2	E2	Weight	# of Locks
		D								
Single Door										
	72434	34-1/2" (876 mm)	28-1/2" (724 mm)	5-7/8" (149 mm)	32-7/8" (835 mm)	26.9" (683 mm)	n/a	n/a	41.1 lb (18.7 kg)	2
	72442	42-1/2" (1080 mm)	28-1/2" (724 mm)	5-7/8" (149 mm)	40-7/8" (1038 mm)	26.9" (683 mm)	n/a	n/a	52.5 lb (23.8 kg)	2
	72446	46-1/2" (1180 mm)	28-1/2" (724 mm)	5-7/8" (149 mm)	44-7/8" (1140 mm)	26.9" (683 mm)	n/a	n/a	53.0 lb (24.0 kg)	3
Double Door										
	72469	69" (1753 mm)	28-1/2" (724 mm)	5-7/8" (149 mm)	32-7/8" (835 mm)	26.9" (683 mm)	32-7/8" (835 mm)	26.9" (683 mm)	82.0 lb (37.2 kg)	4
	72481	85" (2160 mm)	28-1/2" (724 mm)	5-7/8" (149 mm)	40-7/8" (1038 mm)	26.9" (683 mm)	40-7/8" (1038 mm)	26.9" (683 mm)	105.0 lb (47.6 kg)	4
	72493	93" (2360 mm)	28-1/2" (724 mm)	5-7/8" (149 mm)	44-7/8" (1140 mm)	26.9" (683 mm)	44-7/8" (1140 mm)	26.9" (683 mm)	106.0 lb (48.0 kg)	6

### Options

Qty	Stk. #	Description
	71901	Key Lock that can field replace the coin/screwdriver lock of the manifold housing door.




### Technical Data

#### Specifications


Material - backplate	16 Ga galvanized steel
Material - housing and cover	16 Ga satin coat steel

**Dimension Diagram**

**Single Door**

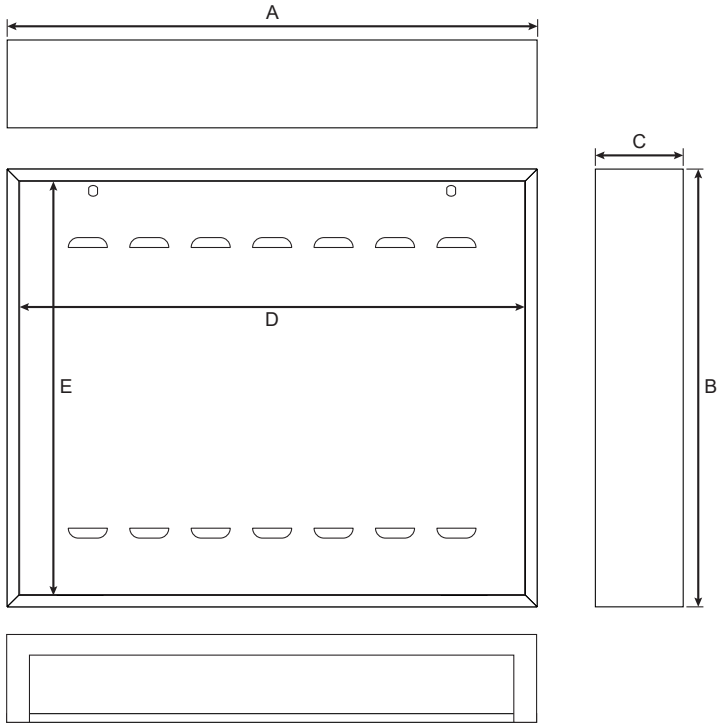


**Double Door**

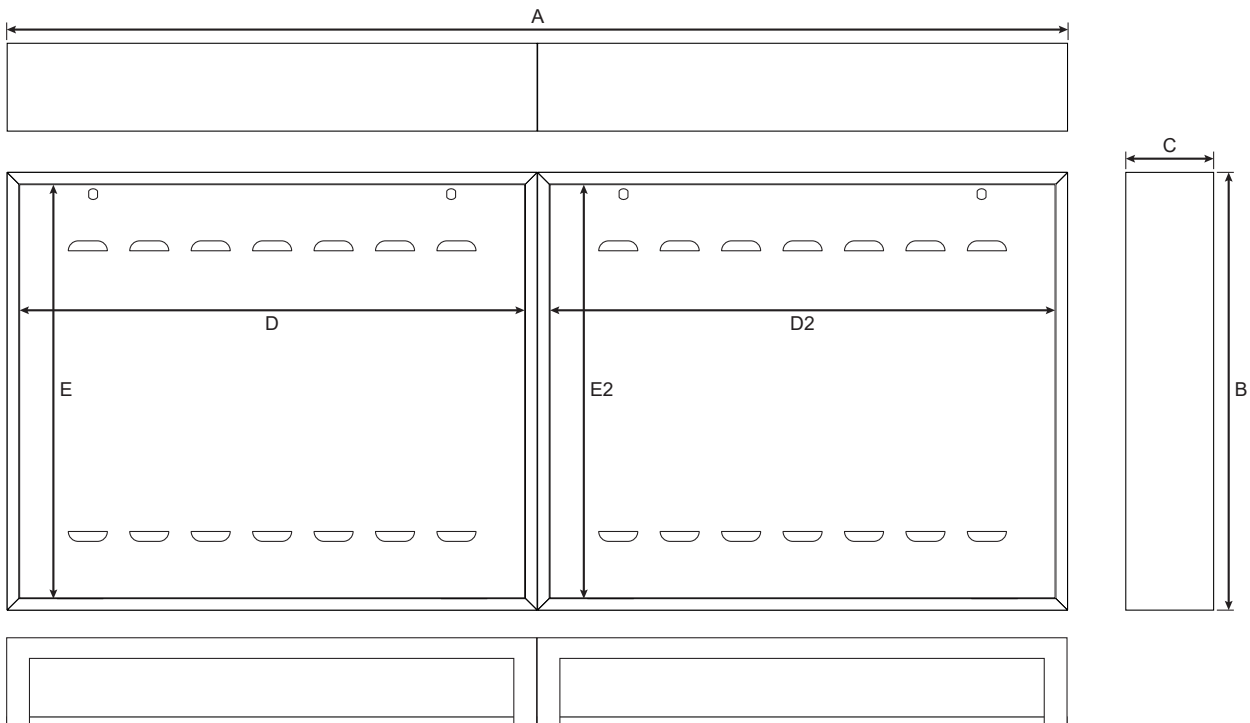

### Housing Selection

Selection table includes an allowance for 90° mains piping.



#### TwistSeal<sup>®</sup> Manifold Assembly Kit

Housing	79400	79402	79200	1-1/4" SS Manifold	1-1/2" SS Manifold
72434	2-8	2-7	2-8	2-9	6
72442	9-12	8-11	9-12	10-12	8-10
72446	—	12	—	—	12
72469	—	—	—	—	14-18
72481	—	—	—	—	20-24
72493	—	—	—	—	—

### Installation

Installation must follow all of HeatLink's instructions and guidelines.

### Maintenance

Maintenance must follow all of HeatLink's instructions and guidelines.

### Related Documents

- L672400 Surface Mount Manifold Housing Installation Instructions
- HeatLink Limited Heating Warranty

*This page is intentionally blank.*