

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description


Stainless steel manifold with high flow characteristics for use as a distribution header or snow melt manifold. 2" trunk with 3/4" ball valve branches and drain valves on supply and return. Two metal mounting brackets are included. Plugs and adapters sold separately.

Technical Data

Material:

- Manifold: Stainless Steel AISI 304
- Mounting Brackets: Zinc Plated Steel
- Hosebib: Nickel Plated Brass
 (CW 617N - UNI EN 12165/16)
- Ball Valves: Nickel Plated Brass
 (CW 617N - UNI EN 12165/16)
- Maximum Trunk Flow Rate: 50 US gpm (11.4 m³/h)
- Branch Pair Cv: 6
- Max Working Pressure 145 psi (10 bar)
- Max. Working Temperature 212°F (100°C)

Qty	# of Loops	Stk. #	Width A	Weight
	4	76604	11-3/4" (299 mm)	17.5 lb (7.9 kg)
	5	76605	14-1/2" (369 mm)	21.2 lb (9.6 kg)
	6	76606	17-1/4" (439 mm)	23.6 lb (10.7 kg)
	7	76607	20" (509 mm)	25.1 lb (11.4 kg)
	8	76608	22-3/4" (579 mm)	28.1 lb (12.7 kg)
	9	76609	25-1/2" (649 mm)	29.9 lb (13.6 kg)
	10	76610	28-1/4" (719 mm)	33.0 lb (15.0 kg)
	11	76611	31" (789 mm)	37.0 lb (16.8 kg)
	12	76612	33-7/8" (859 mm)	38.0 lb (17.2 kg)
	14	76614	39-3/8" (999 mm)	31.0 lb (14.1 kg)

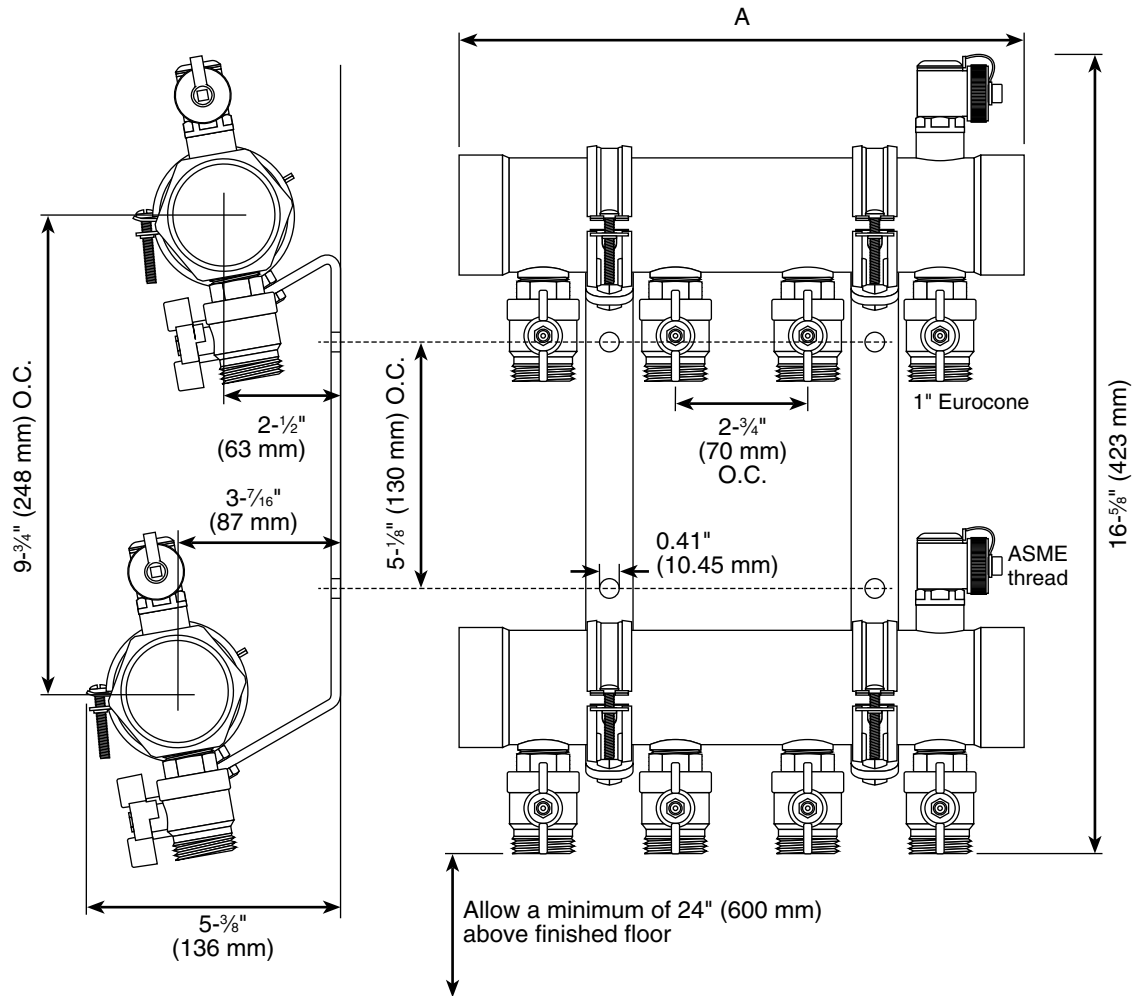

Installation

Installation of stainless steel manifolds must follow all of HeatLink's instructions and guidelines.

Maintenance

Maintenance of stainless steel manifolds must follow all of HeatLink's instructions and guidelines.

Related Documents

- Stainless Steel Manifold Assembly Instructions (L676600)
- HeatLink Limited Heating Warranty