

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

### Description

Used to add automatic air vents to 1-1/4" stainless steel manifolds (75100 and 75200 series) without taking up a loop. Each kit contains a pair of side mount tees, automatic air vents, isolation valves, and hose bibs.


Qty	Stk. #	A	B	C	D	Weight
	76944V	1" (25 mm)	2.3" (58 mm)	4.65" (118 mm)	2.4" (61 mm)	1.00 lb (0.45 kg)

### Technical Data

#### Specifications

#### Material

Forged components	Brass alloy UNI-EN 12165 CW617N (chrome plated)
Machined components	Brass alloy UNI-EN 12164 CW614N (chrome plated)
O-rings	EPDM
Operating temp. range	32-203°F (0-95°C)
Max. Operating Pressure	145 psi (1000 kPa)
Hose bib thread	3/4" GHT
Manifold connection	G1" Male

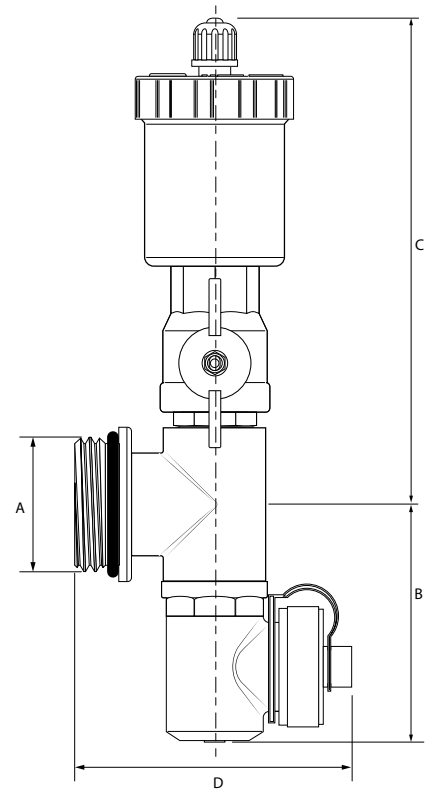

### Installation

Installation must follow all of HeatLink's instructions and guidelines.

### Maintenance

Maintenance must follow all of HeatLink's instructions and guidelines.

### Related Documents

- HeatLink Limited Heating Warranty