

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

### Description

Used to couple together 1-1/2" stainless steel manifolds (76700 series). Each kit contains a pair of three brass pieces with a rubber flat gasket. Loctite 55 pipe sealing cord is recommended for thread sealing (not included).


Qty	Stk. #	A	B	Weight
	76964	G 1 ½" F (38 mm)	2.6" (66 mm)	2.93 lb (1.33 kg)

### Technical Data

#### Specifications

##### Materials

Forged components	Brass alloy UNI-EN 12165 CW617N
Rubber gaskets	EPDM 60SH
Max. operating temp.	212°F (100°C)
Max. operating pressure	145 psi (1000 kPa)

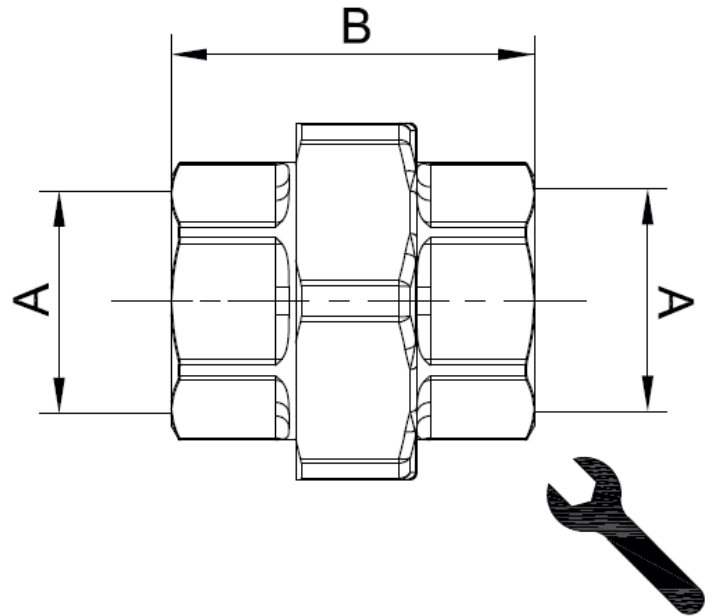

### Installation & Maintenance

Installation must follow all of HeatLink's instructions and guidelines.

### Related Documents

- HeatLink Limited Heating Warranty

*This page is intentionally blank.*