

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :


Description

Used to fasten tubing to wire mesh or rebar. 5-1/2" (140 mm) tie wraps (89105) are used for smaller diameter tubing. 7-1/2" (190 mm) tie wraps (89107) can be used for sizes up to 1".

Technical Data

Color:..... Natural
 Material:..... Nylon 66
 Minimum Temperature:..... 40°F (4.4°C)
 Maximum Temperature:..... 185°F (85°C)
 Plenum Rating:..... AH-2

Bag Qty	Stk. #	Dimension, in / (mm)			Tensile Strength, lb / (N)	Mil-Spec Reference	UL	CSA	# per bag	Bag Weight, lb / (kg)
		A	B	C						
	89105	5.84 (148.3)	0.14 (3.6)	0.04 (1.2)	40 (178)	MS3367-5-9	Type 21	Type 21	1000	1.5 (0.68)
	89107	7.56 (192.1)	0.18 (4.6)	0.05 (1.3)	50 (222)	MS3367-1-9	Type 21S	Type 21S	1000	2.8 (1.26)

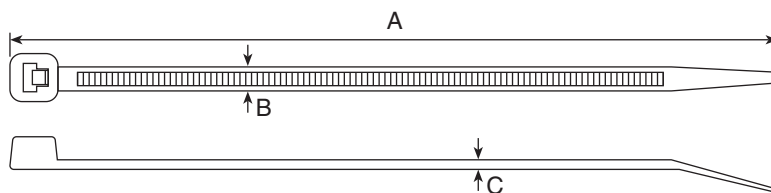


Installation

Installation must follow all of HeatLink's instructions and guidelines, including those in the Installation Guide.

Related Documents

- HeatLink Installation Guide (L3390)
- HeatLink Limited Heating Warranty

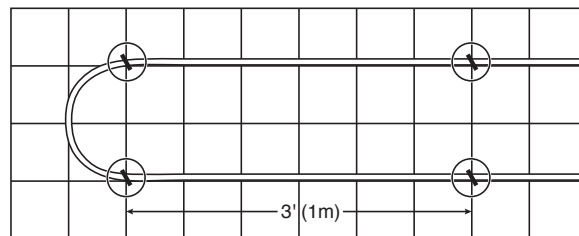

PEX tubing should be secured with tie straps every 3' (1m) on straight runs and at two points on a 180° bend.

This page is intentionally blank.