

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

### Description

The flexible, impact resistant PP sheath designed as a raceway for electrical installations provides mechanical and UV protection to the PEX-a carrier tubing. The sheath allows for easy replacement of the PEX-a carrier tubing if needed.

### Technical Data

Material:..... polypropylene  
 Operating Temperature:..... -40°F to 275°F (-40°C to 135°C) raw material  
 Pinch & Abrasion Resistance: ..... Good  
 Flammability\*:..... UL94HB


### Standards

- ASTM D4101

\* Based on the UL 94 Standard Tests for Flammability of Plastic Materials.  
 Classifications are per ASTM test methods for raw material.  
 Conditions do not apply to finished product.  
 Materials classified as 94HB meet horizontal burn test requirements.

Qty	Stk. #	Size	Length	Color	I.D.	O.D.	Weight	
	92305bcs	1 <sup>5</sup> / <sub>16</sub> "	300'	Coil	Blue	0.75" (19.1 mm)	0.93" (23.6 mm)	7.95 lb (3.60 kg)
	92322bcs	1 3 <sup>1</sup> / <sub>8</sub> "	300'	Coil	Blue	1.058" (26.9 mm)	1.33" (33.8 mm)	18.00 lb (8.16 kg)

### Dimension Diagram

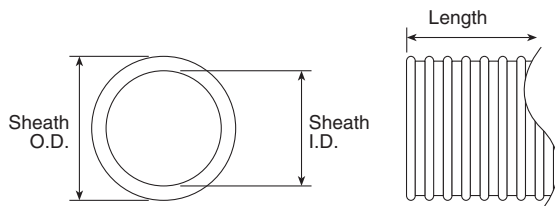

### Related Documents

- HeatLink Limited Plumbing Warranty

*This page is intentionally blank.*