

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

Solid brass fitting is installed into the bottom of the manifold and is held in place by the nut. The tubing and ring is then expanded and placed over the F1960 insert. Comes with o-ring.

EX24200 series expansion rings are sold separately.

Not for potable water use.

Pair Qty	Stk. #	PEX Size	Dim A	Dim B, in/(mm)	Dim C	in/(mm)	Weight (pair), lb/(kg)
	EX77419	5/8"	G 1"	0.744 (18.9)	EK25	1.46 (37)	0.41 (0.18)
	EX77422	3/4"	G 1"	0.870 (22.1)	EK25	1.46 (37)	0.43 (0.2)
	EX77428	1"	G 1"	1.11 (28.1)	EK25	1.46 (37)	0.54 (0.25)

Technical Data

Specifications

Material - Metal Components	Brass ASTM B124 C37700 (CW617N)
Material - O-ring	EPDM
Max Operating Pressure	100 psi (6.9 bar)
Operating Temperature	160°F (70°C)
Max Temperature	195°F (90°C)
Min Operating Temperature	36°F (2°C); 0°F (-18°C) with anti-freeze

Installation


Installation must follow all of HeatLink's instructions and guidelines.

Maintenance

Maintenance must follow all of HeatLink's instructions and guidelines.

Related Documents

- 1-1/2" Stainless Steel Manifold Assembly Instructions (L676700)
- HeatLink Limited Heating Warranty

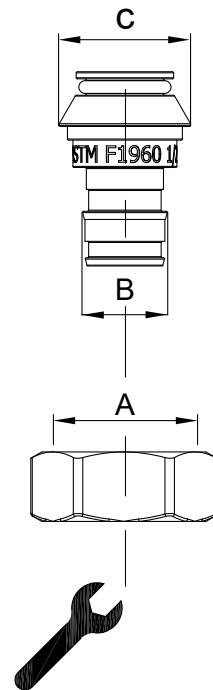

This page is intentionally blank.