

| | |
|---|---------|
| Job or Customer : | |
| Location : | |
| Engineer : | |
| <input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate | Notes : |
| Contractor : | |
| HeatLink Rep : | |
| Submitted By : | Date : |
| Approved By : | Date : |
| P.O. Number : | Date : |

Description

This 3-way valve is used as a mixing valve in the SSTS - Stainless Steel Manifold Mixing Panels with Small Pump. Used with HeatLink actuators or thermostatic heads.

Technical Data

Material - Valve Body & Slide: Brass DZR
 Material - Spindle:..... Stainless steel
 Material - O-ring:..... EPDM
 Max. Operating Temperature:..... 212°F (100°C)
 Min. Operating Temperature:..... 36°F (2°C)
 Max. Operating Pressure:..... 125 psi (862 kPa)
 Max. Differential Pressure: 20 psi
 Flow Coefficient:..... Cv = 3.25 (Kvs = 2.8)
 Actuator Thread:..... M 30x1.5


| Qty | Stk. # |
|-----|--------------|
| | SST-3WMIX-SM |

Installation

Installation must follow all of HeatLink's instructions and guidelines, including those in the installation instructions.

Related Documents

- HeatLink Limited Heating Warranty

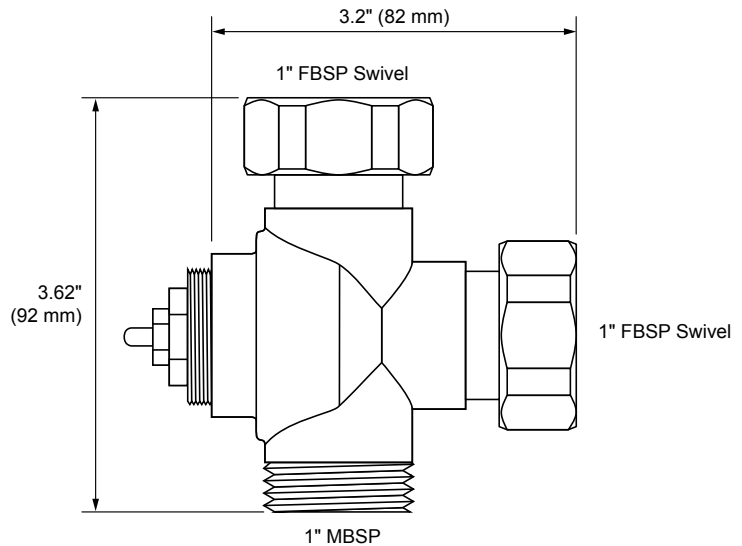

This page is intentionally blank.