




Plumbing, Heating, & Panels Product Catalog / Price List

Originally Effective April 18, 2022
Updated September 16, 2022

2022
USA

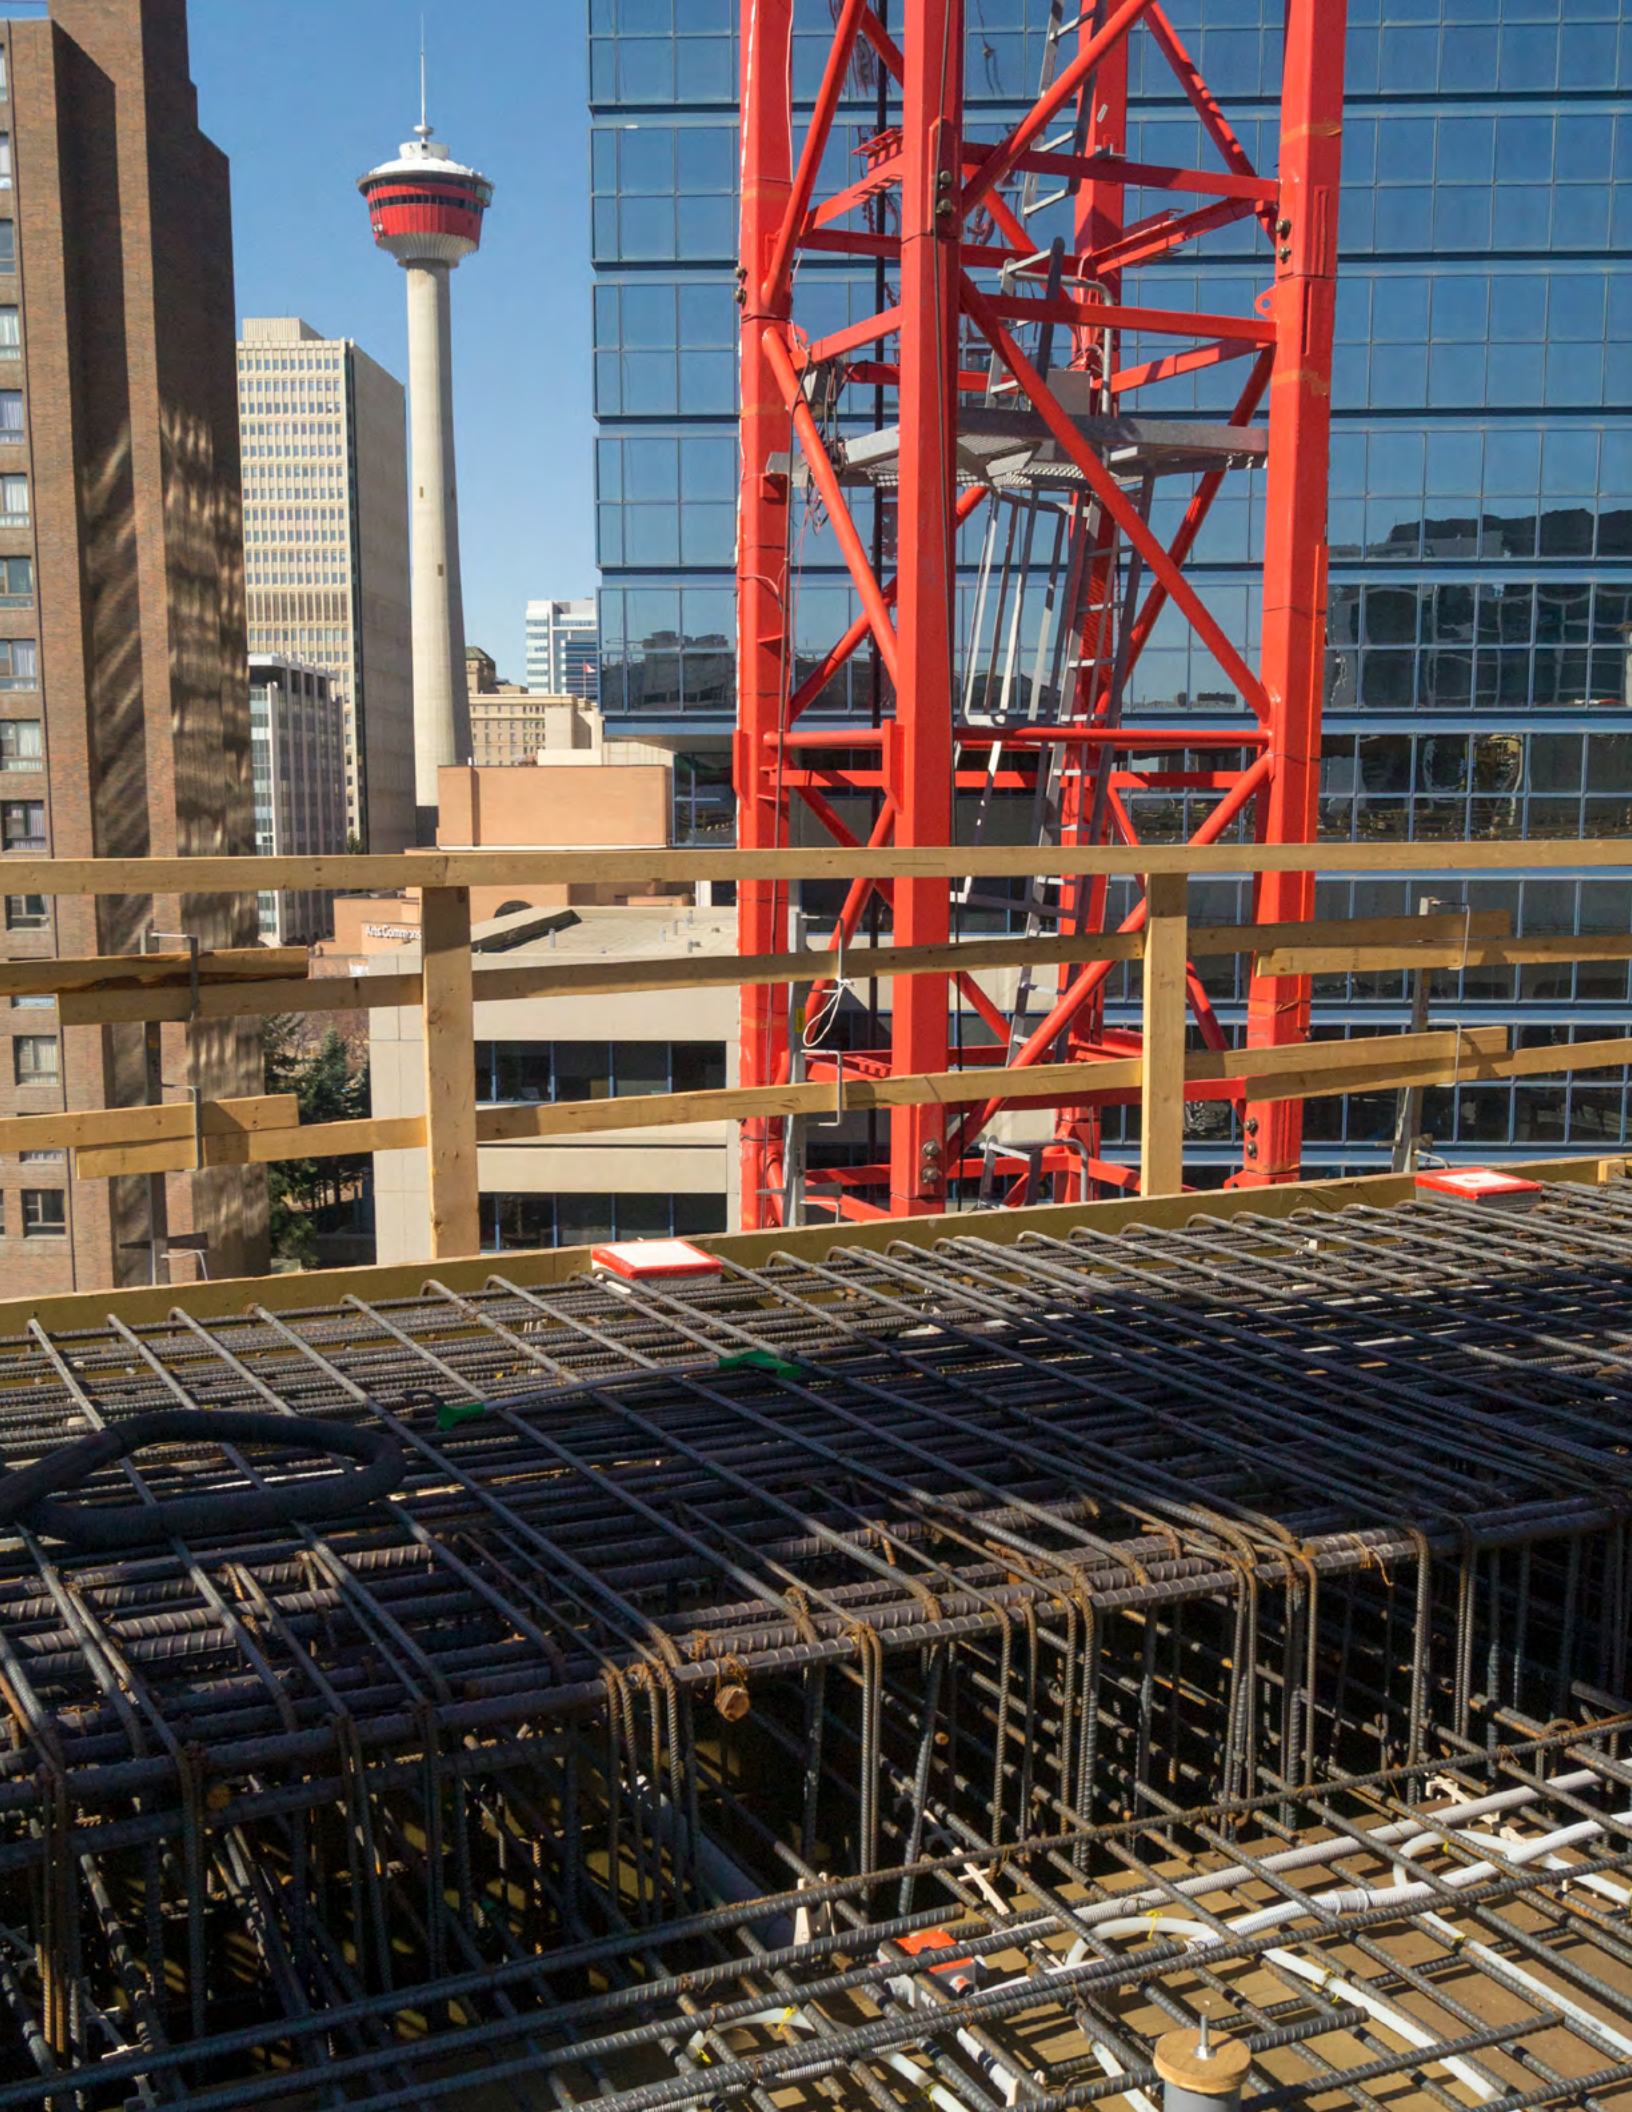



About Us

HeatLink Group Inc. is a multi-system supplier of potable water and radiant hydronic heating/cooling and snow melt systems. For over 25 years we have created comfortable and efficient heating, cooling and plumbing systems for residential and commercial construction.

HeatLink's radiant heating systems create a comfortable and energy efficient environment for living. Our snow melt systems create safer public and private spaces that reduce liability for property owners, reduce maintenance, and ensure accessibility. Our well engineered plumbing systems provide peace of mind for property owners through extensive warranty protection, and enable quick and efficient installations for builders and contractors.

History

HeatLink began as a family owned business developed to service a number of industries including HVAC. The company grew to meet the needs of builders, contractors, and architects and began designing and installing radiant heating systems in 1985. Since 1985 HeatLink has grown into an industry leading designer and manufacturer of radiant heating, cooling, and potable water systems.

HeatLink has developed and manufactured a long list of industry firsts such as the "TwistSeal" tool-less manifold in 1996. The company began manufacturing PEX-a tubing in 1998 and now supplies the highest quality PEX-a systems to customers throughout North America and parts of Europe and Asia.

HeatLink was acquired by Mueller Industries in 2017. Mueller is a publicly traded manufacturer headquartered in Collierville, Tennessee that began operating in 1917 and has operations across the USA, Canada, Mexico, Great Britain, South Korea, the Middle East, and China.

HeatLink works with a network of experienced and successful partner agencies to meet the design, system installation and training needs of the construction industry, designers, and architects.

Solutions

HeatLink is an industry leader in providing a broad range of potable water and radiant heating/cooling and snow melt systems for customers throughout the world. Our focus from our inception remains on creating well engineered and energy efficient solutions that are easy to install and last a lifetime.

Company Description

Our innovative plumbing and heating systems help provide a comfortable and worry free environment for people in residential and commercial work and living spaces. We continue to design quiet and energy efficient heating and potable water systems that are easy to install and last a lifetime. HeatLink was built on a strong family work ethic and a value system that remain the foundation for our continuing growth and industry leadership role.

Parent Company Description

Mueller Industries, Inc. is a leading industrial manufacturer that specializes in copper and copper alloy manufacturing while also producing goods made from aluminum, steel, and plastics. The range of these products is broad: copper tube and fittings; line sets; brass and copper alloy rod, bar, and shapes; aluminum and brass forgings; aluminum impact extrusions; PEX plastic tube; refrigeration valves and fittings; fabricated tubular products; and steel nipples. Mueller also resells brass and plastic plumbing valves, plastic fittings, malleable iron fittings, faucets and plumbing specialty products. Mueller products can be found as critical components in applications ranging from potable water distribution to automotive drive trains to household appliances to radar defense systems, and more, quietly doing their part to make life and business better.

Introduction

Discounts Structure & Shipping Allowances.....	3
Terms and Conditions of Sale, Delivery, and Payment.....	4

Plumbing PEX-a Tubing

PureLink® Potable Water PEX-a Tubing.....	5
PureLink® Pipe-in-Pipe.....	11
Corrugated Sleeves.....	11

Plumbing Press System

Stainless Steel Press Sleeves.....	12
HPP Multiport Tees.....	13
PEX Insert Couplings.....	16
PEX Insert Elbows.....	18
PEX Insert MNPT Adapters.....	19
PEX Insert FNPT Adapters.....	21
PEX Insert Fixture Adapters.....	22
PEX Insert Sweat Adapters.....	23
PEX Insert Tees.....	24
PEX Insert Plugs.....	26
PEX Insert Ball Valves.....	27
Stub-out Elbows.....	29

Plumbing Expansion System

PEX F1960 Expansion Rings and Plugs.....	31
PEX F1960 Multiport Tees.....	32
PEX F1960 Couplings.....	33
PEX F1960 Elbows.....	34
PEX F1960 MNPT Adapters.....	35
PEX F1960 FNPT and Fixture Adapters.....	36
PEX F1960 Sweat Adapters.....	37
PEX F1960 Tees.....	38
PEX F1960 Ball Valves.....	40

Heating

PEX-a Heating Tubing with O ₂ Barrier.....	41
PEX-a Heating Tubing Non Barrier.....	43
TwistSeal® (55 mm) Manifold.....	45
TwistSeal® Mini (40 mm) Manifold Assembly Kits.....	47
TwistSeal® Mini (40 mm) Manifold Modules.....	48
TwistSeal® Manifold Accessories.....	49
1-¼" Stainless Steel Manifolds.....	51
1-¼" Stainless Steel Manifold Accessories.....	52
2" Stainless Steel Manifold.....	54
2" Stainless Steel Manifold Accessories.....	55
Manifold Housings.....	57
PEX Compression Couplings & Adapters.....	58
Thermostatic Valve Bodies.....	59
Thermostatic Heads.....	61
Rotary Mixing Valves and Motors.....	62
Balancing and Bypass Valves.....	65
Actuators.....	66
Smart System.....	67
Thermostats & 24Vac Relay.....	75
StatLink® Modules.....	76
Controls.....	77
Sensors.....	78
Floor Heating Accessories.....	82
Chemicals and Water Testing.....	84

Mechanical Room in a Box (Panels) - Residential

Residential Panel Selection.....	87
ECO Boiler Panels.....	88
V100 Boiler Panels.....	89
CAD Boiler Panels.....	90
KNIGHT Boiler Panels.....	91
TFT Boiler Panels.....	92
BC Boiler Panels.....	93
Electric Boiler Panels.....	94
Electric Boiler Panels with Manifold.....	95
TMP – 3-Way Mixing Panels.....	96
TMP – 3-Way Mixing Panel with Zoning.....	97
TMP – 3-Way Mixing Panel with Outdoor Reset.....	98
TMP – Dual Pump 3-Way Mixing Panel.....	99
TMP-Multi - Modular Mixing Panel.....	100
TWH – Tankless Water Heater Panels w/Opt. DHW Priority.....	102
TWH – Tankless Water Heater Panels with Zoning.....	103
HEP – Isolation Heat Exchanger Panels.....	104
HEP-R – Isolation Heat Exchanger Panels.....	105
HEP-RT – Isolation Heat Exchanger Panels.....	106

Mechanical Room in a Box (Panels) - Commercial

Commercial Panel Selection.....	107
Metering Panels.....	108
SSP - Stainless Steel Manifold Pump Panels.....	110
SSTS - SS Manifold Small Mixing Panels.....	112
SSTL - SS Manifold Large Mixing Panels.....	114
3WMIX - 3-Way Mixing Panels.....	118
4WMIX - 4-Way Mixing Panels.....	119

Mechanical Room in a Box (Panels) - Snow Melt

Snow Melt Panel Selection.....	120
3WMIX-SMCP - 3-Way Mixing w/Snow Melt Control.....	121
4WMIX-SMCP - 4-Way Mixing w/Snow Melt Control.....	122
SMP – Stainless Steel Snow Melt Panels.....	124
SMP – Stainless Steel Snow Melt Panels w/Heat Exchangers.....	125
SMP – Copper Snow Melt Panel.....	126
SMP – Copper Snow Melt Panels with Heat Exchangers.....	127
Snow Melt Panel Options & Accessories.....	128

Accessories, Tools, and Parts

Accessories.....	129
Tools.....	130
Parts.....	138

Appendices

Listing by Stk#.....	147
Summary of Changes.....	166

Please check our website to ensure that you have the latest version of this catalog.

Please note: this price list supersedes all previous price lists.

For your discount please contact your local sales representative.

Shipping Allowances

- Prices and specifications are subject to change without notice.
- Products shipped in multiples of quantity listed only.

Standard shipping times: 3 days from confirmed order (or less).

D/C pickups: 3 days from confirmed order (or less), scheduled with local HeatLink shipping department.

Minimum order value: \$100.00 net

Rush orders: Same day shipment if order confirmed by 11AM.
Next day if order confirmed after 11AM.
Next day freight charges applicable.
Rush charges may apply.

Backorders: Shipped with subsequent order to stocking distributor (if no subsequent order is in place, product will be shipped freight prepaid ground n/c).

Prepaid freight: \$ 3,500 net minimum order without PEX straight lengths.
Net minimum order if ordering PEX straight lengths varies by region.
Subject to change without notice.

Fuel surcharge: May apply on prepaid orders. Rates are subject to change without notice.

1. General Provisions

- (a) This agreement, performances of contract and quotations are made exclusively upon the terms and conditions set out below. Alterations or deviations from the provisions herein contained shall not be binding upon HeatLink Group Inc. unless confirmed in writing.
- (b) The Purchaser hereby accepts the terms and conditions herein contained in their entirety. Stipulations of terms and conditions contrary to the provision hereof according to the Purchaser's business or purchasing practices, invoicing, manner of payment or custom of the trade are hereby specifically agreed to be inapplicable to this agreement.
- (c) In the event that any one or more of the provisions herein contained shall become or be deemed to be invalid, illegal or unenforceable by operation of law, the validity, legality and enforceability of the remaining provisions or any part thereof shall not in any manner be affected or impaired thereby. In place and stead of any such invalid, illegal or unenforceable provisions of any part thereof, the parties hereto shall be deemed to have agreed upon terms and conditions, which, as far as permitted by law, express the intent and purpose of the within terms and conditions.

2. Plans and Specifications

- (a) Drawings, specifications and technical data appended to or forming part of the agreement shall at all times remain the property of HeatLink Group Inc., with all rights reserved and shall not be provided, submitted or disclosed to third parties without the express written consent of HeatLink Group Inc. Changes, alterations, deletions or additions thereto shall not be binding upon HeatLink Group Inc. unless confirmed in writing.

3. Prices and Quotations

- (a) HeatLink Group Inc. hereby specifically reserves the right to change, alter, amend or revoke quotations but the same shall become binding and irrevocable only upon written acceptance by both HeatLink Group Inc. and the Purchaser or upon delivery to and acceptance of goods by the Purchaser.
- (b) Prices are, save and except as otherwise agreed upon, as at HeatLink Group Inc.'s location in Calgary, Alberta, Canada, exclusive of cost of packaging, crating, freight or shipping, federal, provincial or local rates, tariffs and taxes in effect on date of delivery.
- (c) All contract prices are guaranteed for thirty (30) days from date of contract. Cost increases 30 days after contract date, including but not limited to cost increases of materials, wages, fuel, transportation or energy charges and increases in applicable federal, provincial and local rates, tariffs or taxes shall be added to the contract price and form part thereof as if originally agreed upon.
- (d) Contracts for delivery of goods or performance of services without specific agreement as to price shall be subject to the price or prices in effect on the date of delivery of goods.

4. Terms of Payment

- (a) Save and except as otherwise specifically agreed upon in writing, all invoices or accounts, as the case may be, shall become due and payable in full without deduction whatsoever thirty (30) days after invoice or account date.
- (b) Holdbacks or deductions of any kind whatsoever without prior written authorization from HeatLink Group Inc. are expressly prohibited.
- (c) Discounts, if any, shall be calculated on the cost of goods as per invoice, exclusive of cost of packaging, crating, freight or shipping, federal, provincial or local rates, tariffs or taxes, where applicable, or other costs or surcharges beyond control of HeatLink Group Inc.
- (d) Payment will be in a form agreed to and acceptable by HeatLink Group Inc. All costs for dishonour, presentment for payment or collection shall be at the expense of the Purchaser and Payor. All payments by cheque, whether certified or uncertified, shall be deemed as having been received on the date of acceptance for payment of the said cheque or cheques by the Purchaser's or Payor's bank, trust company or financial institution upon whose account the cheque has been issued.
- (e) Payments received shall be applied firstly to designated accounts, dishonour or collection; secondly, to outstanding interest charges on the oldest accounts; and, thirdly, the balance, if any, of any payment shall be applied to the most recent accounts, outstanding balance or balances. If an account is past due at the time of payment, then application of received funds will be in the order best interest to HeatLink Group Inc.
- (f) In the event the Purchaser defaults in payment or causes a cheque, bank draft or money order to be dishonoured or stops payment thereon, or HeatLink Group Inc. shall deem the Purchaser insecure, all accounts shall forthwith become due and payable notwithstanding any agreement as to credit or periodic payment.
- (g) Overdue accounts shall bear interest at the rate stated on the face of the invoice or (if no rate is displayed on the invoice), 2% calculated and compounded monthly.

5. Reservation of Title and Property

- (a) It is hereby expressly agreed that all goods shall remain the exclusive property of HeatLink Group Inc. and title shall not pass until payment in full of all invoices or accounts rendered, including cost of goods, packaging, carting, shipping or freight charges, federal, provincial or local taxes, rates and tariffs, insurance, extras to contract, interest charges, exchange or collection expenses and other sums or charges applicable has been received pursuant to the terms and conditions herein contained.
- (b) Goods delivered shall not, in any event, become part of real estate and the Purchaser shall at all times take or initiate all steps necessary to preserve HeatLink Group Inc.'s right, title and property to such goods.

- (c) The Purchaser shall not permit any goods sold or delivered by HeatLink Group Inc. to be pledged or encumbered without express written consent from HeatLink Group Inc. In the event of seizure by third parties, the Purchaser shall forthwith disclose HeatLink Group Inc.'s reservation of title, right and property to such goods and shall forthwith notify HeatLink Group Inc. of such seizure and shall assist HeatLink Group Inc. at the Purchaser's cost in the preservation and enforcement of HeatLink Group Inc.'s right, title and property to the said goods.
- (d) In the event of breach of contract by the Purchaser of the terms or conditions herein contained and, in particular, default of payment of invoices as herein-before provided, HeatLink Group Inc. shall be entitled, without prior notice, to demand delivery up of goods sold and delivered and to seize the same wherever the same may be located at any time of day or night or to cause its agents, workmen or bailiffs to seize the same, wherever the same may be located at any time of day or night notwithstanding the goods may be in possession of a subsequent purchaser or user.
- (e) Seizure of goods by HeatLink Group Inc. shall not be deemed to constitute termination of contract or contractual rights and obligations as between HeatLink Group Inc. and the Purchaser.

6. Delivery of Goods

- (a) HeatLink Group Inc. shall at all times use its best efforts to maintain the delivery dates agreed upon. The delivery date or period shall be deemed to have been maintained or complied with in all events, cases or situations where the goods to be delivered leave HeatLink Group Inc.'s premises on or before such date, before the expiry of such period or the Purchaser is notified before the applicable date that the goods are ready for shipment.
- (b) Delivery dates or periods shall be extended by reason of delays caused by labour shortages, strikes or lockouts or other circumstances beyond the reasonable control of HeatLink Group Inc. Any delay or postponement of delivery to HeatLink Group Inc. of goods and supplies by its suppliers, subcontractors or co-contractors caused by strike, lockout, labour shortage or unrest or other causes beyond the reasonable control of HeatLink Group Inc., its suppliers, subcontractors or co-contractors shall in like manner extend delivery dates and periods as if the same applied to HeatLink Group Inc.
- (c) In the event of delay in delivery of goods caused by the Purchaser for any reason whatsoever, HeatLink Group Inc. shall be entitled to charge the cost of storage calculated at the rate of one half (½%) percent per month upon the cost of goods, such calculation commencing one month after delivery of Notice of Readiness for shipment and continuing for each and every month or part thereof thereafter until the goods can be delivered to the Purchaser.

7. Risk of Property

- (a) Commencing on the date of delivery of goods for shipment or transport to the Purchaser, the said goods or any part thereof shall be at the risk of the Purchaser.
- (b) Any goods or part thereof delivered for shipment or transport to the Purchaser from the factory Calgary, Alberta, or elsewhere, including goods with unessential or minor defects, shall be deemed to have been accepted by the Purchaser without recourse.
- (c) Deficiencies or defects in goods or part thereof shipped or the shipment of the wrong goods, or part or part thereof, shall be endorsed upon the bill of lading and shall be communicated to HeatLink Group Inc. in writing within three (3) business days of arrival at destination. Failing such notification, the Purchaser shall be deemed to have accepted the goods without recourse.

8. Return of Goods

- (a) Product is returnable for a 50% restocking fee under the following conditions:
 - (i) Purchased within 12 months of return date, referencing original purchase order number
 - (ii) Active inventory in current catalog (WSL, CLR, CD, OBS components excluded)
 - (iii) Remains in the original, unmarked, unopened packaging
 - (iv) New, clean, and re-saleable condition
 - (v) Returned prepaid to HeatLink within 14 days of RMA issuance
- (b) Notes:
 - (i) If the product received is unsatisfactory, or deemed otherwise unsellable, it will be disposed of or returned at the returnee's discretion & cost.
 - (ii) Any exceptions to the above criteria requires Sr. Management approval.

9. Insurance

- (a) During the period commencing with the delivery of goods for shipment or transport to the Purchaser and ending upon receipt of payment in full for the said goods pursuant to the terms and conditions hereof, the Purchaser shall insure the said goods in the joint names of HeatLink Group Inc. and the Purchaser against all risk of loss or damage howsoever caused.

10. Applicable Law

- (a) All disputes, claims or demands arising from or relating to warranties, guarantees, representations authorized and published by HeatLink Group Inc., and from the terms and conditions herein contained and all claims, demands, rights or liabilities arising from such warranties, guarantees, representations or terms and conditions shall be determined in accordance with the laws of the Province of Alberta, Canada.



PureLink® Plus Blue Stripe PEX-a Tubing 20000 Series

High molecular crosslinked polyethylene (PEX) with minimum bending radius of 6× the diameter at 68°F (20°C). Maximum operating temperature 180°F @ 100 psi (82°C @ 7 bar). Blue printing for identification of cold water lines. The PureLink® Plus PEX-a tubing may be used with fittings that are compliant with ASTM F1807/F1960/F2080/F2098/F2159 standards.

For complete specifications, see submittal [SUB20000](#).

Minimum bending radius @ 68°F (20°C) for:

- 1/2" = 3" (77 mm)
- 3/4" = 4-1/2" (115 mm)
- 1" = 6" (153 mm)

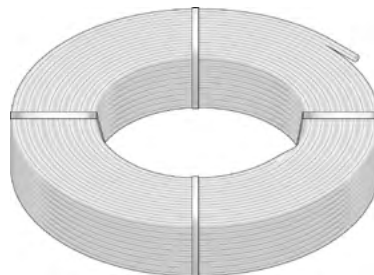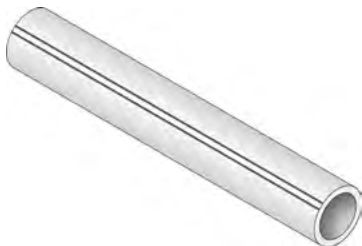

Stk#	Description	Pkg Qty	Skid Qty	Unit	List Price / Unit
20105	1/2" 100ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	96	coil	\$ 104.100
20305	1/2" 300ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	48	coil	\$ 312.30
20505	1/2" 500ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	32	coil	\$ 520.50
20905	1/2" 1000ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	20	coil	\$ 1,041.00
20122	3/4" 100ft Blue PureLink® Plus UV Stabilized PEX-a PexCube™	3	60	coil	\$ 181.000
20322	3/4" 300ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	21	coil	\$ 543.00
20522	3/4" 500ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	12	coil	\$ 905.00
20128	1" 100ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	28	coil	\$ 352.10
20328	1" 300ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	11	coil	\$ 1,056.30

For sizes 1-1/4" and larger, please see [page 9](#).

Stk#	Description	Pkg Qty	Master Bag	Unit	List Price / Unit
20205	1/2" 20×20ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	20	bundle	\$ 416.400
20222	3/4" 10×20ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	20	bundle	\$ 362.000
20228	1" 5×20ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	20	bundle	\$ 352.100

For sizes 1-1/4" and larger, please see [page 9](#).



PureLink® Plus Red Stripe PEX-a Tubing 21000 Series

High molecular crosslinked polyethylene (PEX) with minimum bending radius of 6× the diameter at 68°F (20°C). Maximum operating temperature 180°F @ 100 psi (82°C @ 7 bar). Red printing for identification of hot water lines. The PureLink® Plus PEX-a tubing may also be used with fittings that are compliant with ASTM F1807/F1960/F2080/F2098/F2159 standards.

For complete specifications, see submittal [SUB21000](#).

Minimum bending radius @ 68°F (20°C) for:

- ½" = 3" (77 mm)
- ¾" = 4-½" (115 mm)
- 1" = 6" (153 mm)

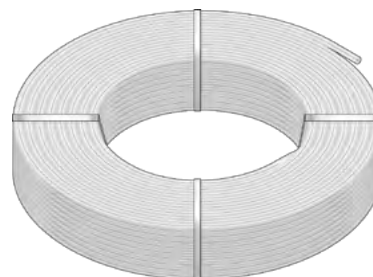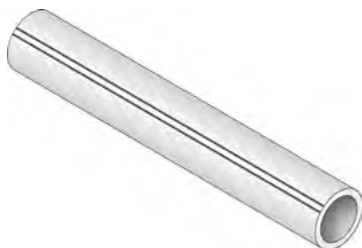

Stk#	Description	Pkg Qty	Skid Qty	Unit	List Price / Unit
21105	½" 100ft Red PureLink® Plus UV Stabilized PEX-a Tubing	1	96	coil	\$ 104.100
21305	½" 300ft Red PureLink® Plus UV Stabilized PEX-a Tubing	1	48	coil	\$ 312.300
21505	½" 500ft Red PureLink® Plus UV Stabilized PEX-a Tubing	1	32	coil	\$ 520.500
21122	¾" 100ft Red PureLink® Plus UV Stabilized PEX-a PexCube	3	60	coil	\$ 181.000
21322	¾" 300ft Red PureLink® Plus UV Stabilized PEX-a Tubing	1	21	coil	\$ 543.000
21128	1" 100ft Red PureLink® Plus UV Stabilized PEX-a Tubing	1	28	coil	\$ 352.100
21328	1" 300ft Red PureLink® Plus UV Stabilized PEX-a Tubing	1	11	coil	\$ 1,056.300

For sizes 1-¼" and larger, please see [page 9](#).

Stk#	Description	Pkg Qty	Master Bag	Unit	List Price / Unit
21205	½" 20×20ft Red PureLink® Plus UV Stabilized PEX-a Tubing	1	20	bundle	\$ 416.400
21222	¾" 10×20ft Red PureLink® Plus UV Stabilized PEX-a Tubing	1	20	bundle	\$ 362.000
21228	1" 5×20ft Red PureLink® Plus UV Stabilized PEX-a Tubing	1	20	bundle	\$ 352.100

For sizes 1-¼" and larger, please see [page 9](#).


PureLink® Plus Blue Wall PEX-a Tubing 20000BW Series

High molecular crosslinked polyethylene (PEX) with minimum bending radius of 6× the diameter at 68°F (20°C). Maximum operating temperature 180°F @ 100 psi (82°C @ 7 bar). Solid blue color for identification of cold water lines. The PureLink® Plus PEX-a tubing may also be used with fittings that are compliant with ASTM F1807/F1960/F2080/F2098/F2159 standards.

For complete specifications, see submittal [SUB20000BW](#).

Minimum bending radius @ 68°F (20°C) for:

- ½" = 3" (77 mm)
- ¾" = 4-½" (115 mm)
- 1" = 6" (153 mm)

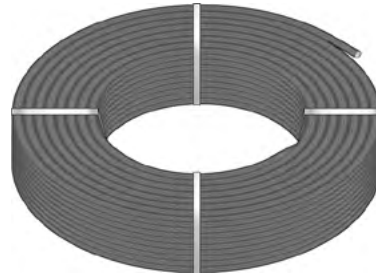

Stk#	Description	Pkg Qty	Skid Qty	Unit	List Price / Unit
20105BW	½" 100ft Blue Wall PureLink® Plus UV Stabilized PEX-a Tubing	1	96	coil	\$ 115.700
20305BW	½" 300ft Blue Wall PureLink® Plus UV Stabilized PEX-a Tubing	1	48	coil	\$ 347.100
20122BW	¾" 100ft Blue Wall PureLink® Plus UV Stabilized PEX-a PexCube™	3	60	coil	\$ 200.700
20322BW	¾" 300ft Blue Wall PureLink® Plus UV Stabilized PEX-a Tubing	1	21	coil	\$ 602.100
20128BW	1" 100ft Blue Wall PureLink® Plus UV Stabilized PEX-a Tubing	1	28	coil	\$ 390.600
20328BW	1" 300ft Blue Wall PureLink® Plus UV Stabilized PEX-a Tubing	1	11	coil	\$ 1,171.800

Stk#	Description	Pkg Qty	Master Bag	Unit	List Price / Unit
20205BW	½" 20×20ft Blue Wall PureLink® Plus UV Stabilized PEX-a Tubing	1	20	bundle	\$ 462.800
20222BW	¾" 10×20ft Blue Wall PureLink® Plus UV Stabilized PEX-a Tubing	1	20	bundle	\$ 401.400
20228BW	1" 5×20ft Blue Wall PureLink® Plus UV Stabilized PEX-a Tubing	1	20	bundle	\$ 390.600


PureLink® Plus Red Wall PEX-a Tubing 21000RW Series

High molecular crosslinked polyethylene (PEX) with minimum bending radius of 6× the diameter at 68°F (20°C). Maximum operating temperature 180°F @ 100 psi (82°C @ 7 bar). Solid red color for identification of hot water lines. The PureLink® Plus PEX-a tubing may also be used with fittings that are compliant with ASTM F1807/F1960/F2080/F2098/F2159 standards.

For complete specifications, see submittal [SUB21000RW](#).

Minimum bending radius @ 68°F (20°C) for:

- ½" = 3" (77 mm)
- ¾" = 4-½" (115 mm)
- 1" = 6" (153 mm)

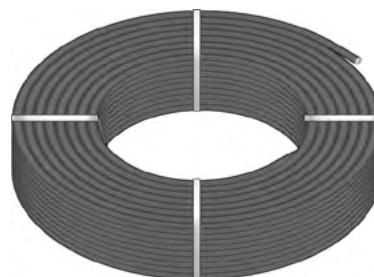

Stk#	Description	Pkg Qty	Skid Qty	Unit	List Price / Unit
21105RW	½" 100ft Red Wall PureLink® Plus UV Stabilized PEX-a Tubing	1	96	coil	\$ 115.700
21305RW	½" 300ft Red Wall PureLink® Plus UV Stabilized PEX-a Tubing	1	48	coil	\$ 347.100
21122RW	¾" 100ft Red Wall PureLink® Plus UV Stabilized PEX-a PexCube™	3	60	coil	\$ 200.700
21322RW	¾" 300ft Red Wall PureLink® Plus UV Stabilized PEX-a Tubing	1	21	coil	\$ 602.100
21128RW	1" 100ft Red Wall PureLink® Plus UV Stabilized PEX-a Tubing	1	28	coil	\$ 390.600
21328RW	1" 300ft Red Wall PureLink® Plus UV Stabilized PEX-a Tubing	1	11	coil	\$ 1,171.800

Stk#	Description	Pkg Qty	Master Bag	Unit	List Price / Unit
21205RW	½" 20×20ft Red Wall PureLink® Plus UV Stabilized PEX-a Tubing	1	20	bundle	\$ 462.800
21222RW	¾" 10×20ft Red Wall PureLink® Plus UV Stabilized PEX-a Tubing	1	20	bundle	\$ 401.400
21228RW	1" 5×20ft Red Wall PureLink® Plus UV Stabilized PEX-a Tubing	1	20	bundle	\$ 390.600


PureLink® Plus Large Dimension PEX-a Tubing 20000 Series

High molecular crosslinked polyethylene (PEX) with minimum bending radius of 6× the diameter at 68°F (20°C). Maximum operating temperature 180°F @ 100 psi (82°C @ 7 bar). Black printing so tubing can be used for cold or hot water lines. The PureLink® Plus PEX-a tubing may also be used with fittings that are compliant with ASTM F1807/F1960/F2080/F2098 standards.

For complete specifications, see submittal [SUB20000](#).

Minimum bending radius @ 68°F (20°C) for:

- 1-1/4" = 7-1/2" (191 mm)
- 1-1/2" = 9" (229 mm)
- 2" = 12" (305 mm)


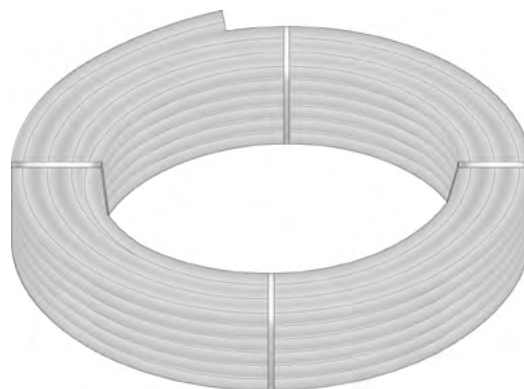


Stk#	Description	Pkg Qty	Skid Qty	Unit	List Price / Unit
20135	1-1/4" 100ft PureLink® Plus UV Stabilized PEX-a Tubing	1	10	coil	\$ 660.800
20335	1-1/4" 300ft PureLink® Plus UV Stabilized PEX-a Tubing	1	7	coil	\$ 1,982.400
20145	1-1/2" 100ft PureLink® Plus UV Stabilized PEX-a Tubing	1	8	coil	\$ 871.800
20345	1-1/2" 300ft PureLink® Plus UV Stabilized PEX-a Tubing	1	5	coil	\$ 2,615.400
20154	2" 100ft PureLink® Plus UV Stabilized PEX-a Tubing	1	5	coil	\$ 1,735.300
20354	2" 300ft PureLink® Plus UV Stabilized PEX-a Tubing	1	3	coil	\$ 5,205.900

Stk#	Description	Pkg Qty	Master Bag	Unit	List Price / Unit
20235	1-1/4" 5×20ft PureLink® Plus UV Stabilized PEX-a Tubing	1	15	bundle	\$ 660.800
20245	1-1/2" 5×20ft PureLink® Plus UV Stabilized PEX-a Tubing	1	10	bundle	\$ 871.800
20254	2" 5×20ft PureLink® Plus UV Stabilized PEX-a Tubing	1	5	bundle	\$ 1,735.300

Pure Link[®] Pipe-in-Pipe

Never again deal with the hassle of trying to pull tubing through conduits. Our pliable PEX-a tubing is available in a high impact resistant sheath.

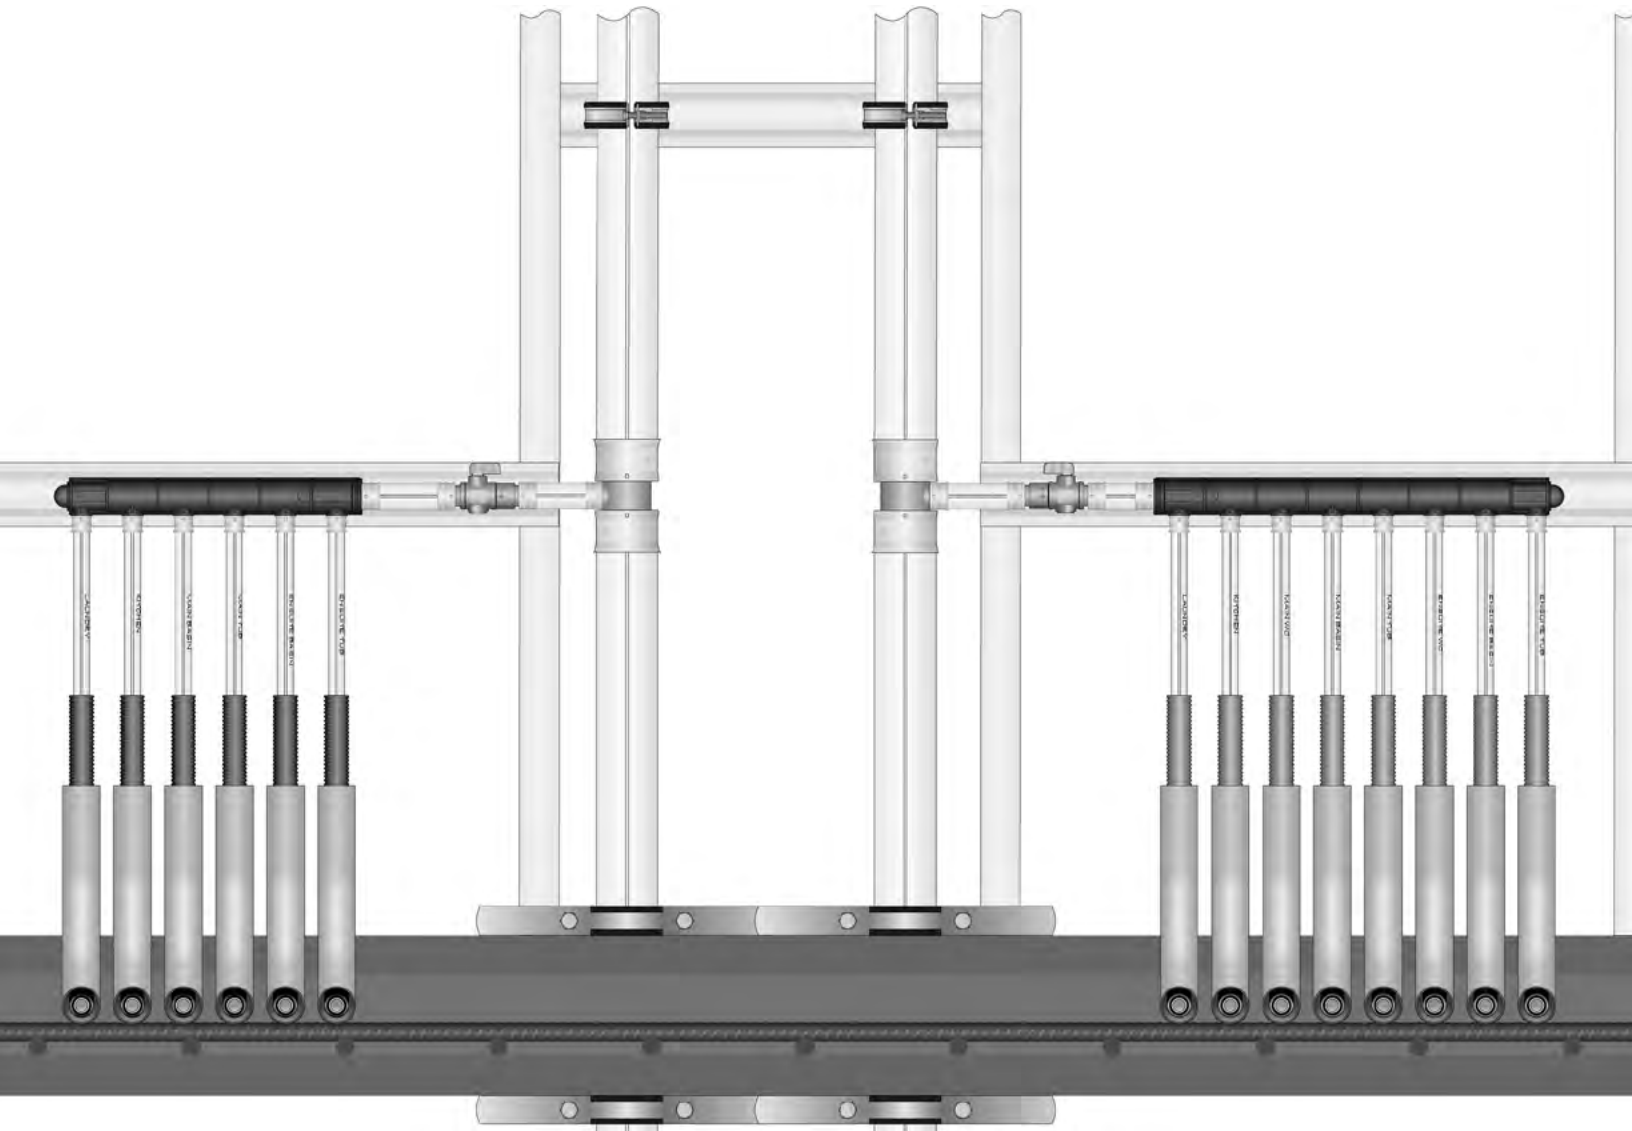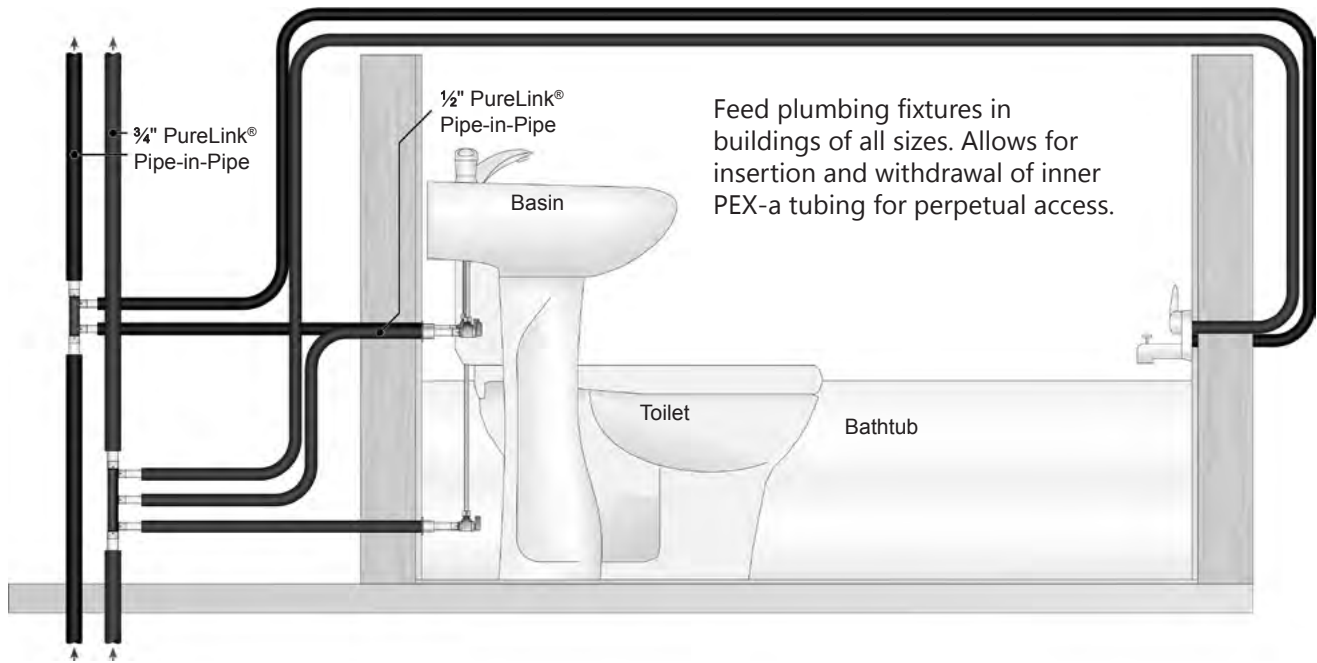

PureLink® Plus Pipe-in-Pipe 92000 Sheathed Series

PEX-a carrier tubing specified on previous pages. The flexible, impact resistant PP sheath designed as a raceway for electrical installations provides mechanical and UV protection to the PEX-a carrier tubing. The sheath allows for easy replacement of the PEX-a carrier tubing if needed. Red and Blue colored sheaths make for easy identification of hot and cold water lines.

For complete specifications, see submittal [SUB92000](#).

Minimum bending radius @ 68°F (20°C) for:

- ½" = 3" (77 mm)
- ¾" = 4-½" (115 mm)
- 1" = 6" (153 mm)

PP sheath is rated to UL94HB "Tests for Flammability of Plastic Materials."

Corrugated sheath outside diameter for:

- ½" = 0.93" (23.6 mm)
- ¾" = 1.33" (33.8 mm)
- 1" = 1.5" (38.1 mm)



Stk#	Description	Pkg Qty	Skid Qty	Unit	List Price / Unit
92305bs	½" 300ft Blue PureLink® Plus Pipe-in-Pipe	1	18	coil	\$ 591.900
92322bs	¾" 300ft Blue PureLink® Plus Pipe-in-Pipe	1	9	coil	\$ 1,043.100
92128bs	1" 100ft Blue PureLink® Plus Pipe-in-Pipe	1	14	coil	\$ 631.900

Stk#	Description	Pkg Qty	Skid Qty	Unit	List Price / Unit
92305rs	½" 300ft Red PureLink® Plus Pipe-in-Pipe	1	18	coil	\$ 591.900
92322rs	¾" 300ft Red PureLink® Plus Pipe-in-Pipe	1	9	coil	\$ 1,043.100
92128rs	1" 100ft Red PureLink® Plus Pipe-in-Pipe	1	14	coil	\$ 631.900

Corrugated Sleeves 92000cs Series

The flexible, impact resistant PP sheath designed as a raceway for electrical installations provides mechanical and UV protection to the PEX-a carrier tubing. The sheath allows for easy replacement of the PEX-a carrier tubing if needed.

For complete specifications, see submittal [SUB92000cs](#).

PP sheath is rated to UL94HB "Tests for Flammability of Plastic Materials."

Corrugated sheath outside diameter for:

- ½" = 0.93" (23.6 mm)
- ¾" = 1.33" (33.8 mm)



Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
92305bcs	15/16" 300ft Blue Corrugated Sleeve for ½" PEX	1		ea.	\$ 226.500
92322bcs	1-3/8" 300ft Blue Corrugated Sleeve for ¾" PEX	1		ea.	\$ 388.200

Making a Lasting Impression

Press Sleeve

HeatLink Potable Water Systems now offers a start-to-finish system capped off with the unique PEX tubing watertight connection ... the stainless steel Press Sleeve.

The Press Sleeve slides over the outer part of the PEX-a tubing, before inserting the fitting. When the fitting is in place, the press tool secures the connection in one single press, evidenced by a smooth visible depression ring on the sleeve's surface.

Once the pressing is complete, everything is set for the pressure test. The room for error is reduced, as the visible impression on the sleeve indicates readiness for the pressure test.

HeatLink's Press Sleeve—an impressive connection to have in any pressing situation.

The SS Press Sleeve is tested to ASTM F877 and is NSF-pw listed.



non-pressed



pressed
(press profile may vary with tool)



Stainless Steel Press Sleeves 24200 Series

Press sleeve with view hole.

For complete specifications, see submittal [SUB24200](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
24205	½" SS Press Sleeve	100	1000	ea.	\$ 0.568
24222	¾" SS Press Sleeve	50	500	ea.	\$ 0.893
24228	1" SS Press Sleeve	50	250	ea.	\$ 1.831
24235	1-¼" SS Press Sleeve	10	150	ea.	\$ 7.280
24241	1-½" SS Press Sleeve	10	100	ea.	\$ 8.652
24250	2" SS Press Sleeve	10	100	ea.	\$ 10.511



13203M

Closed End HPP Mini Multiport Tee 13000M Series

Closed one end and ¾" PEX insert on the other end. ½" branches in single row. SS press sleeves sold separately.

For complete specifications, see submittal [SUB13000M](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
13202M	2 Port, ¾" PEX × Closed End HPP Mini Multiport Tee	5	100	ea.	\$ 9.853
13203M	3 Port, ¾" PEX × Closed End HPP Mini Multiport Tee	5	80	ea.	\$ 13.093
13204M	4 Port, ¾" PEX × Closed End HPP Mini Multiport Tee	5	60	ea.	\$ 16.653



13203



13833

Closed End HPP Multiport Tee 13000 Series

Closed one end and ¾" or 1" PEX insert on the other end. ½" branches in single row or opposing rows. SS press sleeves sold separately.

For complete specifications, see submittal [SUB13000](#).

	Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
WSL	13203	3 Port Single Row, ¾" PEX × Closed End HPP Multiport Tee	5	250	ea.	\$ 40.251
	13204	4 Port Single Row, ¾" PEX × Closed End HPP Multiport Tee	5	250	ea.	\$ 35.836
	13206	6 Port Single Row, ¾" PEX × Closed End HPP Multiport Tee	5	150	ea.	\$ 42.779
	13208	8 Port Single Row, ¾" PEX × Closed End HPP Multiport Tee	5	125	ea.	\$ 70.335
WSL	13808	8 Port Single Row, 1" PEX × Closed End HPP Multiport Tee	5	125	ea.	\$ 62.220
WSL	13833	6 Port Opposing Rows, 1" PEX × Closed End HPP Multiport Tee	5	250	ea.	\$ 38.290
WSL	13844	8 Port Opposing Rows, 1" PEX × Closed End HPP Multiport Tee	5	250	ea.	\$ 44.030



14203M

Flow Through HPP Mini Multiport Tee 14000M Series

Open on both ends with ¾" PEX insert connections. ½" branches in single row. SS press sleeves sold separately.

For complete specifications, see submittal [SUB14000M](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
14202M	2 Port, ¾" PEX × ¾" PEX Flow Through HPP Mini Multiport Tee	5	100	ea.	\$ 10.444
14203M	3 Port, ¾" PEX × ¾" PEX Flow Through HPP Mini Multiport Tee	5	80	ea.	\$ 13.762
14204M	4 Port, ¾" PEX × ¾" PEX Flow Through HPP Mini Multiport Tee	5	60	ea.	\$ 17.203



14203






14233

Flow Through HPP Multiport Tee 14000 Series

Open on both ends with ¾" or 1" PEX insert connections. ½" branches in single row or opposing rows. SS press sleeves sold separately.

For complete specifications, see submittal [SUB14000](#).

	Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
WSL	14203	3 Port Single Row, ¾" PEX × ¾" PEX Flow Through HPP Multiport Tee	5	250	ea.	\$ 29.767
WSL	14204	4 Port Single Row, ¾" PEX × ¾" PEX Flow Through HPP Multiport Tee	5	200	ea.	\$ 31.294
WSL	14703	3 Port Single Row, 1" PEX × ¾" PEX Flow Through HPP Multiport Tee	5	200	ea.	\$ 27.250
WSL	14704	4 Port Single Row, 1" PEX × ¾" PEX Flow Through HPP Multiport Tee	5	200	ea.	\$ 36.010
WSL	14706	6 Port Single Row, 1" PEX × ¾" PEX Flow Through HPP Multiport Tee	5	100	ea.	\$ 60.468
WSL	14708	8 Port Single Row, 1" PEX × ¾" PEX Flow Through HPP Multiport Tee	5	150	ea.	\$ 60.073
WSL	14233	6 Port Opposing Rows, ¾" PEX × ¾" PEX Flow Through HPP Multiport Tee	5	200	ea.	\$ 39.023
WSL	14244	8 Port Opposing Rows, ¾" PEX × ¾" PEX Flow Through HPP Multiport Tee	5	125	ea.	\$ 44.030
WSL	14733	6 Port Opposing Rows, 1" PEX × ¾" PEX Flow Through HPP Multiport Tee	5	150	ea.	\$ 38.290
WSL	14744	8 Port Opposing Rows, 1" PEX × ¾" PEX Flow Through HPP Multiport Tee	5	100	ea.	\$ 44.030

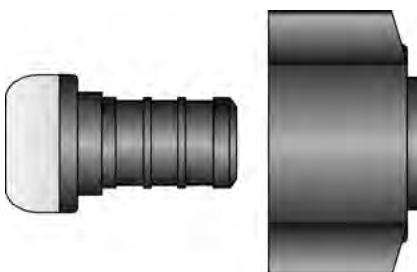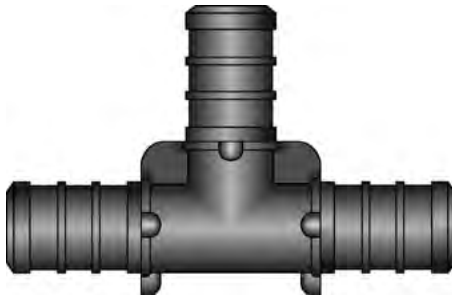

Heat Link[®]

HPP Fitting System

The HeatLink High Performance Polymer (HPP) fitting system is produced from a specific blend of engineered high performance polyphenylsulfone (PPSU) resins. When combined, these resins offer outstanding long-term performance and chemical resistance. The sulfone family of resins began to replace brass in the plumbing industry over 20 years ago, and in the course of time have exceeded the stringent demands of the potable and heating industries.



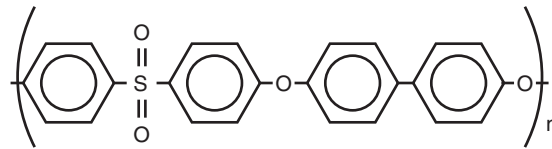


Figure #1 – General Chemical Structure of PPSU

The HeatLink HPP fittings stand out in the market place due to a unique combination of characteristics designed to deliver superior performance.

- Outstanding resistance to hot chlorinated water
- Superior long-term hydrostatic strength
- Excellent thermal stability
- High resistance to mineral acids, alkali, and salt solutions
- Higher resistance to polar solvents and stress cracking than traditional polysulfone
- Robust toughness and impact strength
- Exceptional hydrolytic stability
- Improved notch resistance






PEX Insert Couplings - **No Lead Brass** 29000NL Series

Solid no lead brass (C69300-EcoBrass) PEX insert × PEX insert couplings. SS press sleeves sold separately.

For complete specifications, see submittal [SUB29000NL](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
29005NL	½" × ½" PEX No Lead Brass Coupling	25	500	ea.	\$ 3.112
29022NL	¾" × ¾" PEX No Lead Brass Coupling	25	250	ea.	\$ 4.070
29028NL	1" × 1" PEX No Lead Brass Coupling	10	250	ea.	\$ 6.639
29035NL	1-¼" × 1-¼" PEX No Lead Brass Coupling	5	180	ea.	\$ 13.750
29041NL	1-½" × 1-½" PEX No Lead Brass Coupling	5	90	ea.	\$ 47.011
29054NL	2" × 2" PEX No Lead Brass Coupling	5	25	ea.	\$ 67.882

Note: 1-½" and larger fittings may be ordered in less than package quantities; no surcharge.



PEX Insert Reducing Couplings - **No Lead Brass** 29200NL Series

Solid no lead brass (C69300-EcoBrass) PEX insert × PEX insert reducing couplings. SS press sleeves sold separately.

For complete specifications, see submittal [SUB29000NL](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
29225NL	¾" × ½" PEX No Lead Brass Coupling	25	500	ea.	\$ 5.470
29282NL	1" × ¾" PEX No Lead Brass Coupling	10	250	ea.	\$ 7.395
29238NL	1-¼" × 1" PEX No Lead Brass Coupling	5	200	ea.	\$ 14.433
29243NL	1-½" × 1-¼" PEX No Lead Brass Coupling	5	100	ea.	\$ 24.777
29248NL	1-½" × 1" PEX No Lead Brass Coupling	5	100	ea.	\$ 45.677
29263NL	2" × 1-¼" PEX No Lead Brass Coupling	5	25	ea.	\$ 62.992
29264NL	2" × 1-½" PEX No Lead Brass Coupling	5	25	ea.	\$ 66.364

Note: 1-½" and larger fittings may be ordered in less than package quantities; no surcharge.



PEX Insert Couplings - **HPP** 19000 Series

High Performance Polymer PEX insert couplings. SS press sleeves sold separately.

For complete specifications, see submittal [SUB19000](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
19005	1/2" x 1/2" PEX HPP Coupling	25	1000	ea.	\$ 1.250
19022	3/4" x 3/4" PEX HPP Coupling	25	500	ea.	\$ 1.910
19028	1" x 1" PEX HPP Coupling	10	200	ea.	\$ 3.711




PEX Insert Reducing Couplings - **HPP** 19200 Series

High Performance Polymer PEX insert reducing couplings. SS press sleeves sold separately.

For complete specifications, see submittal [SUB19000](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
19225	3/4" x 1/2" PEX HPP Coupling	25	600	ea.	\$ 1.533
19282	1" x 3/4" PEX HPP Coupling	5	300	ea.	\$ 3.629




PEX Insert Elbows - **No Lead Brass** 28000NL Series

Solid no lead brass (C69300-EcoBrass) PEX insert × PEX insert elbows. SS press sleeves sold separately.

For complete specifications, see submittal [SUB28000NL](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
28005NL	½" × ½" PEX No Lead Brass Elbow	25	250	ea.	\$ 4.325
28022NL	¾" × ¾" PEX No Lead Brass Elbow	25	250	ea.	\$ 6.456
28028NL	1" × 1" PEX No Lead Brass Elbow	10	100	ea.	\$ 14.584
28035NL	1-¼" × 1-¼" PEX No Lead Brass Elbow	5	120	ea.	\$ 27.256
28041NL	1-½" × 1-½" PEX No Lead Brass Elbow	5	50	ea.	\$ 65.857
28054NL	2" × 2" PEX No Lead Brass Elbow	5	25	ea.	\$ 114.041

Note: 1-½" and larger fittings may be ordered in less than package quantities; no surcharge.



PEX Insert Reducing Elbows - **No Lead Brass** 28200NL Series

Solid no lead brass (C69300-EcoBrass) PEX insert × PEX insert reducing elbows. SS press sleeves sold separately.

For complete specifications, see submittal [SUB28000NL](#).

WSL

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
28225NL	¾" × ½" PEX No Lead Brass Elbow	10	250	ea.	\$ 5.280



PEX Insert Elbows - **HPP** 18000 Series

High Performance Polymer PEX insert elbows. SS press sleeves sold separately.

For complete specifications, see submittal [SUB18000](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
18005	½" × ½" PEX HPP Elbow	25	600	ea.	\$ 1.574
18022	¾" × ¾" PEX HPP Elbow	25	300	ea.	\$ 2.678
18225	¾" × ½" PEX HPP Elbow	10	400	ea.	\$ 2.504
18028	1" × 1" PEX HPP Elbow	10	150	ea.	\$ 6.292



PEX Insert × MNPT Elbows - *No Lead Brass*
28500NL Series

Solid no lead brass (C69300-EcoBrass) PEX insert elbows. SS press sleeves sold separately.

For complete specifications, see submittal [SUB28500NL](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
28535NL	1-1/4" PEX × 1-1/4" MNPT No Lead Brass Elbow	5	50	ea.	\$ 58.990

Note: 1-1/2" and larger fittings may be ordered in less than package quantities; no surcharge.



PEX Insert x MNPT Adapters - **No Lead Brass** 27500NL Series

Solid brass no lead (C69300-EcoBrass) PEX insert x MNPT adapters. SS press sleeves sold separately.

For complete specifications, see submittal [SUB27500NL](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
27505NL	½" PEX x ½" MNPT No Lead Brass Adapter	25	250	ea.	\$ 7.370
27552NL	½" PEX x ¾" MNPT No Lead Brass Adapter	10	250	ea.	\$ 10.339
27522NL	¾" PEX x ¾" MNPT No Lead Brass Adapter	25	250	ea.	\$ 10.692
27525NL	¾" PEX x 1" MNPT No Lead Brass Adapter	25	250	ea.	\$ 8.731
27528NL	1" PEX x 1" MNPT No Lead Brass Adapter	10	150	ea.	\$ 19.061
27582NL	1" PEX x ¾" MNPT No Lead Brass Adapter	5	200	ea.	\$ 13.652
27535NL	1-¼" PEX x 1-¼" MNPT No Lead Brass Adapter	5	100	ea.	\$ 45.931
27538NL	1-¼" PEX x 1" MNPT No Lead Brass Adapter	5	100	ea.	\$ 30.316
27541NL	1-½" PEX x 1-½" MNPT No Lead Brass Adapter	5	50	ea.	\$ 47.808
27554NL	2" PEX x 2" MNPT No Lead Brass Adapter	5	25	ea.	\$ 134.250

Note: 1-½" and larger fittings may be ordered in less than package quantities; no surcharge.



PEX Insert x MNPT Adapters - **HPP** 17500 Series

High Performance Polymer PEX insert x MNPT adapters. SS press sleeves sold separately.

For complete specifications, see submittal [SUB17500](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
17505	½" PEX x ½" MNPT HPP Adapter	25	500	ea.	\$ 2.582
17552	½" PEX x ¾" MNPT HPP Adapter	25	350	ea.	\$ 3.239
17522	¾" PEX x ¾" MNPT HPP Adapter	25	300	ea.	\$ 3.362
17525	¾" PEX x 1" MNPT HPP Adapter	25	400	ea.	\$ 2.110

WSL



Drop Ear Elbows - **No Lead Brass** 28300NL Series

Solid no lead brass (C69300-EcoBrass) ½" PEX insert × ½" FNPT drop ear elbow. SS press sleeves sold separately.

For complete specifications, see submittal [SUB28300NL](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
28305NL	½" PEX × ½" FNPT Drop Ear No Lead Brass Elbow	10	160	ea.	\$ 17.836



PEX Insert × FNPT Adapters - **No Lead Brass** 27600NL Series

Solid no lead brass (C69300-EcoBrass) PEX insert × FNPT adapters. SS press sleeves sold separately.

For complete specifications, see submittal [SUB27600NL](#).

WSL

WSL

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
27605NL	½" PEX × ½" FNPT No Lead Brass Adapter	25	400	ea.	\$ 8.909
27622NL	¾" PEX × ¾" FNPT No Lead Brass Adapter	25	300	ea.	\$ 12.231
27628NL	1" PEX × 1" FNPT No Lead Brass Adapter	25	150	ea.	\$ 16.886
27632NL	1-¼" PEX × ¾" FNPT No Lead Brass Adapter	5	200	ea.	\$ 21.890
27635NL	1-¼" PEX × 1-¼" FNPT No Lead Brass Adapter	5	80	ea.	\$ 55.404
27638NL	1-¼" PEX × 1" FNPT No Lead Brass Adapter	5	100	ea.	\$ 29.670

Note: 1-½" and larger fittings may be ordered in less than package quantities; no surcharge.



PEX Insert x FNPT Swivel Adapters - **HPP** 17700 Series

High Performance Polymer PEX insert x FNPT swivel adapters. SS press sleeves sold separately.

For complete specifications, see submittal [SUB17700](#).

WSL

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
17755	1/2" PEX x 1/2" FNPT Swivel HPP Adapter	25	500	ea.	\$ 3.242
17705	1/2" PEX x Ballcock/Closet FNPT Swivel HPP Adapter	25	525	ea.	\$ 3.920



PEX Insert x FNPT Swivel Elbow Adapter - **HPP** Stk# 18605

High Performance Polymer PEX insert x FNPT swivel elbow adapters. SS press sleeves sold separately.

For complete specifications, see submittal [SUB18605](#).

WSL

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
18605	1/2" PEX x 1/2" FNPT HPP Swivel Elbow	25	300	ea.	\$ 3.050



1/2" PEX x 3/8" O.D. Comp. Straight Lav. Tube Adapter - **NL** **Brass**

Stk# 25751NL

Solid no lead brass (C69300-EcoBrass) adapter for connecting faucets. SS press sleeves sold separately.

For complete specifications, see submittal [SUB25751NL](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
25751NL	1/2" PEX x 3/8" O.D. No Lead Brass Adapter	5	100	ea.	\$ 5.382



PEX Insert x Male Sweat Adapters - **No Lead Brass** 27100NL Series

Solid no lead brass (C69300-EcoBrass) PEX insert x male sweat adapters. SS press sleeves sold separately.

Not intended for use with copper press fittings.

For complete specifications, see submittal [SUB27000NL](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
27105NL	½" PEX x ½" M/Sweat No Lead Brass Adapter	25	700	ea.	\$ 3.538
27122NL	¾" PEX x ¾" M/Sweat No Lead Brass Adapter	25	400	ea.	\$ 6.380
27128NL	1" PEX x 1" M/Sweat No Lead Brass Adapter	10	200	ea.	\$ 11.708
27135NL	1-¼" PEX x 1-¼" M/Sweat No Lead Brass Adapter	5	120	ea.	\$ 22.080
27141NL	1-½" PEX x 1-½" M/Sweat No Lead Brass Adapter	5	80	ea.	\$ 73.052
27154NL	2" PEX x 2" M/Sweat No Lead Brass Adapter	5	25	ea.	\$ 86.723

Note: 1-½" and larger fittings may be ordered in less than package quantities; no surcharge.




PEX Insert x Female Sweat Adapters - **No Lead Brass** 27200NL & 27300NL Series

Solid no lead brass (C69300-EcoBrass) PEX insert x female sweat adapters. SS press sleeves sold separately.

For complete specifications, see submittal [SUB27000NL](#).

WSL

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
27205NL	½" PEX x ½" F/Sweat No Lead Brass Adapter	25	700	ea.	\$ 3.886
27222NL	¾" PEX x ¾" F/Sweat No Lead Brass Adapter	25	400	ea.	\$ 6.955
27328NL	¾" PEX x 1" F/Sweat No Lead Adapter	10	100	ea.	\$ 7.540
27228NL	1" PEX x 1" F/Sweat No Lead Brass Adapter	10	200	ea.	\$ 16.825
27235NL	1-¼" PEX x 1-¼" F/Sweat No Lead Brass Adapter	5	120	ea.	\$ 25.409




PEX Insert Tees - **No Lead Brass** 26000NL Series

Solid no lead brass (C69300-EcoBrass) PEX insert tees. SS press sleeves sold separately.

For complete specifications, see submittal [SUB26000NL](#).

Stk#	Description (run × run × branch)	Pkg Qty	Carton Qty	Unit	List Price / Unit
26555NL	½" × ½" × ½" PEX No Lead Brass Tee	25	250	ea.	\$ 5.310
26222NL	¾" × ¾" × ¾" PEX No Lead Brass Tee	25	250	ea.	\$ 8.468
26888NL	1" × 1" × 1" PEX No Lead Brass Tee	10	100	ea.	\$ 18.106
26333NL	1-¼" × 1-¼" × 1-¼" PEX No Lead Brass Tee	5	80	ea.	\$ 42.892
26444NL	1-½" × 1-½" × 1-½" PEX No Lead Brass Tee	5	30	ea.	\$ 88.620
26666NL	2" × 2" × 2" PEX No Lead Brass Tee	5	25	ea.	\$ 159.484

Note: 1-½" and larger fittings may be ordered in less than package quantities; no surcharge.




PEX Insert Tees - **HPP** 16000 Series

High Performance Polymer PEX insert tees. SS press sleeves sold separately.

For complete specifications, see submittal [SUB16000](#).

Stk#	Description (run × run × branch)	Pkg Qty	Carton Qty	Unit	List Price / Unit
16555	½" × ½" × ½" PEX HPP Tee	25	400	ea.	\$ 2.299
16222	¾" × ¾" × ¾" PEX HPP Tee	25	200	ea.	\$ 3.377
16888	1" × 1" × 1" PEX HPP Tee	10	100	ea.	\$ 9.008




PEX Insert Reducing Tees - **HPP** 16000 Series

High Performance Polymer PEX insert reducing tees. SS press sleeves sold separately.

For complete specifications, see submittal [SUB16000](#).

Stk#	Description (run × run × branch)	Pkg Qty	Carton Qty	Unit	List Price / Unit
16552	½" × ½" × ¾" PEX HPP Tee	25	300	ea.	\$ 2.851
16225	¾" × ¾" × ½" PEX HPP Tee	25	250	ea.	\$ 3.160
16228	¾" × ¾" × 1" PEX HPP Tee	5	300	ea.	\$ 7.455
16255	¾" × ½" × ½" PEX HPP Tee	25	300	ea.	\$ 2.664
16252	¾" × ½" × ¾" PEX HPP Tee	25	250	ea.	\$ 3.362
16885	1" × 1" × ½" PEX HPP Tee	10	360	ea.	\$ 6.804
16882	1" × 1" × ¾" PEX HPP Tee	5	100	ea.	\$ 7.051
16822	1" × ¾" × ¾" PEX HPP Tee	5	320	ea.	\$ 7.631
16828	1" × ¾" × 1" PEX HPP Tee	5	300	ea.	\$ 7.158




PEX Insert Reducing Tees - **No Lead Brass** 26000NL Series

Solid no lead brass (C69300-EcoBrass) PEX insert tees. SS press sleeves sold separately.

For complete specifications, see submittal [SUB26000NL](#).

	Stk#	Description (run × run × branch)	Pkg Qty	Carton Qty	Unit	List Price / Unit
WSL	26552NL	1/2" × 1/2" × 3/4" PEX No Lead Brass Tee	10	250	ea.	\$ 5.400
	26225NL	3/4" × 3/4" × 1/2" PEX No Lead Brass Tee	25	250	ea.	\$ 8.277
	26252NL	3/4" × 1/2" × 3/4" PEX No Lead Brass Tee	25	250	ea.	\$ 8.480
	26255NL	3/4" × 1/2" × 1/2" PEX No Lead Brass Tee	25	250	ea.	\$ 8.260
	26822NL	1" × 3/4" × 3/4" PEX No Lead Brass Tee	5	100	ea.	\$ 18.656
	26885NL	1" × 1" × 1/2" PEX No Lead Brass Tee	10	100	ea.	\$ 17.540
	26882NL	1" × 1" × 3/4" PEX No Lead Brass Tee	5	100	ea.	\$ 20.268
	26382NL	1-1/4" × 1" × 3/4" PEX No Lead Brass Tee	5	100	ea.	\$ 39.555
	26388NL	1-1/4" × 1" × 1" PEX No Lead Brass Tee	5	100	ea.	\$ 45.765
	26335NL	1-1/4" × 1-1/4" × 1/2" PEX No Lead Brass Tee	5	100	ea.	\$ 34.091
	26332NL	1-1/4" × 1-1/4" × 3/4" PEX No Lead Brass Tee	5	80	ea.	\$ 41.491
	26338NL	1-1/4" × 1-1/4" × 1" PEX No Lead Brass Tee	5	80	ea.	\$ 50.050
WSL	26422NL	1-1/2" × 3/4" × 3/4" PEX No Lead Brass Tee	5	60	ea.	\$ 45.530
	26432NL	1-1/2" × 1-1/4" × 3/4" PEX No Lead Brass Tee	5	50	ea.	\$ 69.775
	26442NL	1-1/2" × 1-1/2" × 3/4" PEX No Lead Brass Tee	5	50	ea.	\$ 57.570
	26488NL	1-1/2" × 1" × 1" PEX No Lead Brass Tee	5	50	ea.	\$ 77.234
WSL	26433NL	1-1/2" × 1-1/4" × 1-1/4" PEX No Lead Brass Tee	5	40	ea.	\$ 59.780
	26448NL	1-1/2" × 1-1/2" × 1" PEX No Lead Brass Tee	5	40	ea.	\$ 83.247
WSL	26443NL	1-1/2" × 1-1/2" × 1-1/4" PEX No Lead Brass Tee	5	40	ea.	\$ 65.150
	26633NL	2" × 1-1/4" × 1-1/4" PEX No Lead Brass Tee	5	25	ea.	\$ 176.931
	26642NL	2" × 1-1/2" × 3/4" PEX No Lead Brass Tee	5	25	ea.	\$ 131.613
	26648NL	2" × 1-1/2" × 1" PEX No Lead Brass Tee	5	25	ea.	\$ 135.051
	26643NL	2" × 1-1/2" × 1-1/4" PEX No Lead Brass Tee	5	25	ea.	\$ 139.859
	26644NL	2" × 1-1/2" × 1-1/2" PEX No Lead Brass Tee	5	25	ea.	\$ 154.210
	26662NL	2" × 2" × 3/4" PEX No Lead Brass Tee	5	25	ea.	\$ 132.491
	26668NL	2" × 2" × 1" PEX No Lead Brass Tee	5	25	ea.	\$ 129.715
	26663NL	2" × 2" × 1-1/4" PEX No Lead Brass Tee	5	25	ea.	\$ 133.994
	26664NL	2" × 2" × 1-1/2" PEX No Lead Brass Tee	5	25	ea.	\$ 151.165

Note: 1-1/2" and larger fittings may be ordered in less than package quantities; no surcharge.



PEX Insert Plugs - **No Lead Brass** 25000NL Series

Solid no lead brass (C69300-EcoBrass) PEX insert plug. SS press sleeves sold separately.

For complete specifications, see submittal [SUB25000NL](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
25005NL	½" PEX No Lead Brass Plug	25	1200	ea.	\$ 2.532
25022NL	¾" PEX No Lead Brass Plug	25	1000	ea.	\$ 3.538
25028NL	1" PEX No Lead Brass Plug	5	510	ea.	\$ 5.086
25035NL	1-¼" PEX No Lead Brass Plug	5	260	ea.	\$ 13.743
25041NL	1-½" PEX No Lead Brass Plug	5	110	ea.	\$ 61.454
25054NL	2" PEX No Lead Brass Plug	5	25	ea.	\$ 61.556

Note: 1-½" and larger fittings may be ordered in less than package quantities; no surcharge.




PEX Insert Plugs - **HPP** 15000 Series

High Performance Polymer PEX insert plugs. SS press sleeves sold separately.

For complete specifications, see submittal [SUB15000](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
15005	½" PEX HPP Plug	25	2000	ea.	\$ 0.904
15022	¾" PEX HPP Plug	25	1000	ea.	\$ 1.481
15028	1" PEX HPP Plug	5	500	ea.	\$ 2.408




Plated Straight Ball Valve - **No Lead Brass** Stk #23505NL

No lead brass (C69300-EcoBrass) ½" PEX × ¾" O.D. compression, nickel plated straight ball valve. SS press sleeves sold separately.

For complete specifications, see submittal [SUB23505NL](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
23505NL	½" PEX × ¾" O.D. No Lead Brass Plated Straight Ball Valve	24	144	ea.	\$ 29.655



Plated Angle Ball Valve - **No Lead Brass** Stk# 23605NL

No lead brass (C69300-EcoBrass) ½" PEX × ¾" O.D. compression, nickel plated angle ball valve. SS press sleeves sold separately.

For complete specifications, see submittal [SUB23605NL](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
23605NL	½" PEX × ¾" O.D. No Lead Brass Plated Angle Ball Valve	24	144	ea.	\$ 30.412



Straight Ball Valve - **No Lead Brass** Stk# 23905NL

No lead brass (C69300-EcoBrass) ½" PEX × ¼" O.D. compression, straight ball valve. SS press sleeves sold separately.

For complete specifications, see submittal [SUB23905NL](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
23905NL	½" PEX × ¼" O.D. No Lead Straight Ball Valve	24	144	ea.	\$ 36.775



PEX Insert Straight Ball Valves - **No Lead Brass** 23700NL Series

No lead brass (C69300-EcoBrass) valve. SS press sleeves sold separately.

For complete specifications, see submittal [SUB23700NL](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
23705NL	½" PEX Straight No Lead Brass Ball Valve	24	144	ea.	\$ 31.861
23722NL	¾" PEX Straight No Lead Brass Ball Valve	24	144	ea.	\$ 40.062




Stop and Waste Valves - **No Lead Brass** 23770NL Series

No lead brass (C69300-EcoBrass) stop and waste valves. SS press sleeves sold separately.

For complete specifications, see submittal [SUB23770NL](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
23775NL	½" PEX No Lead Stop and Waste Valve	24	144	ea.	\$ 35.190
23772NL	¾" PEX No Lead Stop and Waste Valve	12	72	ea.	\$ 43.740



1/2" PEX × 1/2" M/Sweat Straight Ball Valve - **No Lead Brass** Stk# 23405NL

No lead brass (C69300-EcoBrass) 1/2" PEX × 1/2" male sweat ball valve. SS press sleeves sold separately.

For complete specifications, see submittal [SUB23405NL](#).

	Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
WSL	23405NL	1/2" PEX × 1/2" No Lead M/Sweat Straight Ball Valve	24	144	ea.	\$ 11.820



PEX Insert Ball Valves - **No Lead Brass** 23300NL Series

No lead brass PEX F1807 × PEX F1807 full port straight ball valves with lever handle. SS press sleeves sold separately.

For complete specifications, see submittal [SUB23300NL](#).

Now available!

	Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
New!	23305NL	1/2" PEX F1807 No Lead Brass Ball Valve, Full Port	10	120	ea.	\$ 12.560
New!	23322NL	3/4" PEX F1807 No Lead Brass Ball Valve, Full Port	10	80	ea.	\$ 19.440
New!	23328NL	1" PEX F1807 No Lead Brass Ball Valve, Full Port	6	48	ea.	\$ 33.860
New!	23335NL	1-1/4" PEX F1807 No Lead Brass Ball Valve, Full Port	4	24	ea.	\$ 53.590
New!	23341NL	1-1/2" PEX F1807 No Lead Brass Ball Valve, Full Port	2	16	ea.	\$ 72.900
New!	23354NL	2" PEX F1807 No Lead Brass Ball Valve, Full Port	2	12	ea.	\$ 122.660




PEX Insert × MNPT Ball Valves - **No Lead Brass** 23800NL Series

No lead brass PEX F1807 × MNPT straight ball valves with butterfly handle. SS press sleeves sold separately.

For complete specifications, see submittal [SUB23800NL](#).

Now available!

	Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
New!	23822NL	3/4" PEX F1807 × 3/4" MNPT No Lead Brass Ball Valve	10	80	ea.	\$ 26.180



Stub-out Elbow with Edge Bracket Stk# 28205

Copper stub-out elbow allows for 90° transitions between fixtures and wall cavities. SS press sleeves sold separately.

For complete specifications, see submittal [SUB28205](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
28205	½" PEX Barb Stubout Elbow with Edge Bracket	25	100	ea.	\$ 17.500



Stub-out Elbow Stk# 28206

Copper stub-out elbow allows for 90° transitions between fixtures and wall cavities. SS press sleeves sold separately.

For complete specifications, see submittal [SUB28206](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
28206	½" PEX × Closed, 3-½" × 6" Stub-out Elbow	50		ea.	\$ 10.774

Look What's New!

Heat Link®

F1960 PEX-a Potable Water Expansion System



Fittings and Multiport Tees

High Performance Plastic (HPP) and No Lead (Eco)Brass fittings available in ½" to 2" for all of your plumbing needs.

PEX-a Expansion Rings


Uses the strong shape memory of PEX-a to form a tight seal. The PEX-a tubing and expansion ring are expanded with a specialized tool, and allowed to contract in order to form the connection. As the PEX-a contracts the connection will strengthen.

PureLink® Plus PEX-a Tubing

Cross-linked polyethylene tubing; crosslinking occurs during the extrusion process resulting in more uniform and higher degree in cross linking, as well as significantly improved material properties, such as flexibility, chemical resistance, and durability.

HeatLink F1960 Expansion System Advantages:

- Clean & non-toxic
- Resists scaling & corrosion
- Quiet – no water hammer noise
- Equalized pressure drops, minimize hot or cold surges
- Durable
- Reliable installation
- Low friction losses
- Meets all applicable North American approvals including:
 - » Domestic hot water continuous recirculation
 - » CAN/ULC S102/2010 and ASTM E84 plenum acceptance
- Flexible tubing means fewer fittings
- Discreet red/blue identification on PEX tubing
- Freeze resistant
- UV stabilized & chlorine resistance
- Connections can be checked visually
- Can't be dry fit

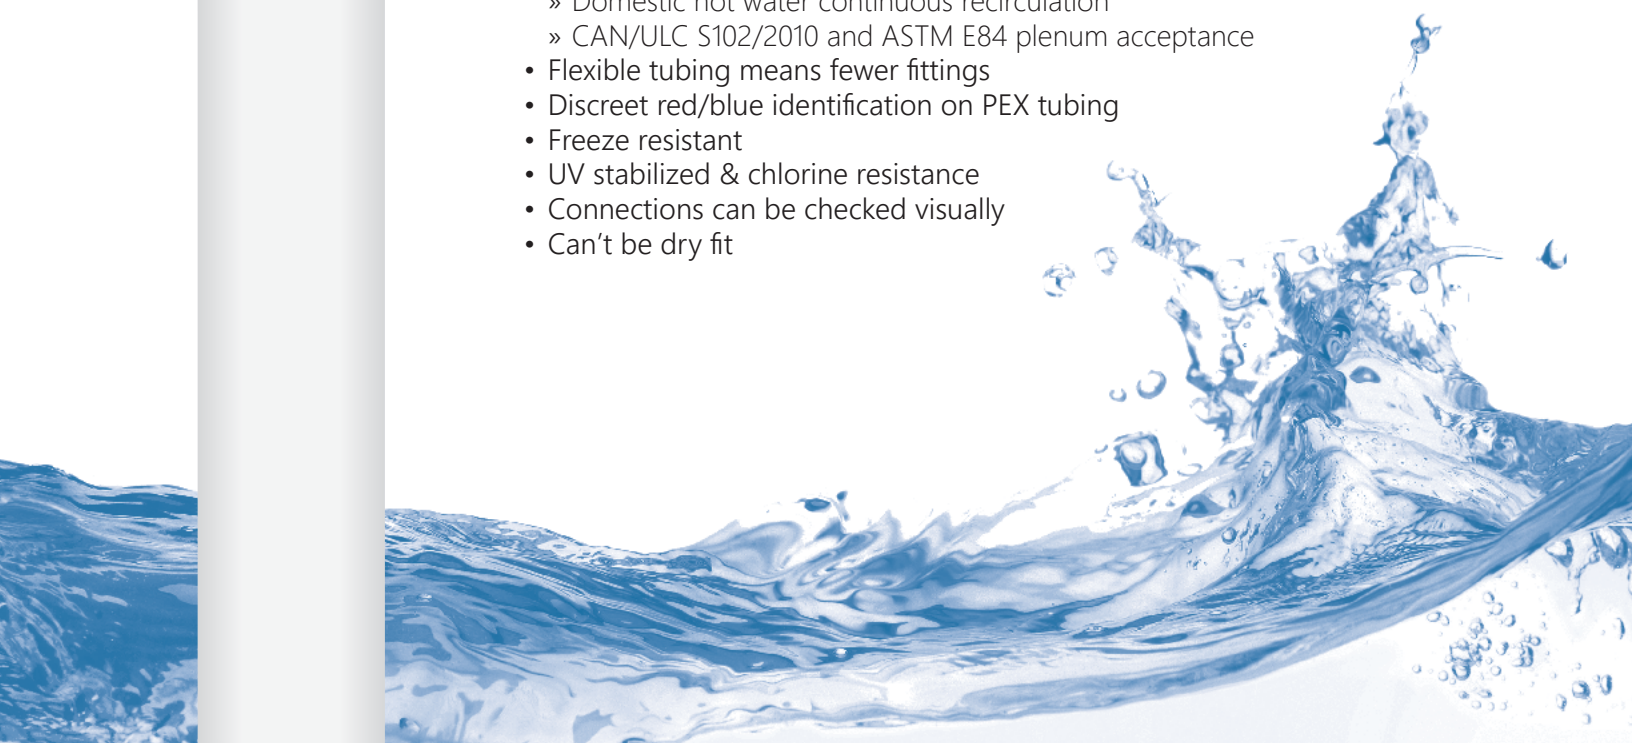



PEX-a Expansion Rings with Stop EX24200 Series

PEX-a expansion rings with 360 degree stop collar for use with PEX F1960 fittings.

For complete specifications, see submittal [SUBEX24200](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
EX24205	½" PEX F1960 Expansion Ring	100	1000	ea.	\$ 0.544
EX24222	¾" PEX F1960 Expansion Ring	50	500	ea.	\$ 1.085
EX24228	1" PEX F1960 Expansion Ring	50	250	ea.	\$ 2.285
EX24235	1-¼" PEX F1960 Expansion Ring	10	150	ea.	\$ 2.671
EX24241	1-½" PEX F1960 Expansion Ring	10	100	ea.	\$ 3.482
EX24250	2" PEX F1960 Expansion Ring	5	50	ea.	\$ 7.099



PEX F1960 Plugs - *HPP* EX15000 Series

High Performance Polymer PEX F1960 plugs. PEX-a expansion rings sold separately.

For complete specifications, see submittal [SUBEX15000](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
EX15005	½" PEX F1960 HPP Plug	25	1000	ea.	\$ 2.357
EX15022	¾" PEX F1960 HPP Plug	25	500	ea.	\$ 3.805
EX15028	1" PEX F1960 HPP Plug	5	600	ea.	\$ 5.059
EX15035	1-¼" PEX F1960 HPP Plug	1	50	ea.	\$ 23.819
EX15041	1-½" PEX F1960 HPP Plug	1	50	ea.	\$ 36.674
EX15054	2" PEX F1960 HPP Plug	1	50	ea.	\$ 41.746



PEX F1960 Closed End HPP Multiport Tees EX13000 Series

Closed one end and 3/4" or 1" PEX F1960 on the other end. 1/2" PEX F1960 branches in single row. PEX-a expansion rings sold separately.

For complete specifications, see submittal [SUBEX13000](#)

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
EX13203	3 Port, 3/4" PEX F1960 × Closed End HPP Multiport Tee	5	80	ea.	\$ 17.319
EX13204	4 Port, 3/4" PEX F1960 × Closed End HPP Multiport Tee	5	60	ea.	\$ 24.619
EX13206	6 Port, 3/4" PEX F1960 × Closed End HPP Multiport Tee	5	40	ea.	\$ 30.293
EX13806	6 Port, 1" PEX F1960 × Closed End HPP Multiport Tee	5	40	ea.	\$ 71.725




PEX F1960 Flow Through HPP Multiport Tees EX14000 Series

Open on both ends with 3/4" or 1" PEX F1960 connections. 1/2" PEX F1960 branches in single row. PEX-a expansion rings sold separately.

For complete specifications, see submittal [SUBEX14000](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
EX14202	2 Port, 3/4" × 3/4" PEX F1960 Flow Through HPP Multiport Tee	5	100	ea.	\$ 14.828
EX14203	3 Port, 3/4" × 3/4" PEX F1960 Flow Through HPP Multiport Tee	5	80	ea.	\$ 20.106
EX14204	4 Port, 3/4" × 3/4" PEX F1960 Flow Through HPP Multiport Tee	5	60	ea.	\$ 25.052
EX14706	6 Port, 1" × 3/4" PEX F1960 Flow Through HPP Multiport Tee	5	40	ea.	\$ 71.606




PEX F1960 Couplings - **No Lead Brass** EX29000NL Series

Solid no lead brass (C69300-EcoBrass) PEX F1960 × PEX F1960 couplings. PEX-a expansion rings sold separately.

For complete specifications, see submittal [SUBEX29000NL](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
EX29005NL	½" × ½" PEX F1960 No Lead Brass Coupling	25	500	ea.	\$ 9.576
EX29022NL	¾" × ¾" PEX F1960 No Lead Brass Coupling	25	250	ea.	\$ 14.802
EX29028NL	1" × 1" PEX F1960 No Lead Brass Coupling	10	250	ea.	\$ 27.752



PEX F1960 Reducing Couplings - **No Lead Brass** EX29200NL Series

Solid no lead brass (C69300-EcoBrass) PEX F1960 × PEX F1960 reducing couplings. PEX-a expansion rings sold separately.

For complete specifications, see submittal [SUBEX29000NL](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
EX29225NL	¾" × ½" PEX F1960 No Lead Brass Coupling	25	500	ea.	\$ 12.912
EX29282NL	1" × ¾" PEX F1960 No Lead Brass Coupling	10	250	ea.	\$ 22.848



PEX F1960 Couplings - **HPP** EX19000 Series

High Performance Polymer PEX F1960 couplings. PEX-a expansion rings sold separately.

For complete specifications, see submittal [SUBEX19000](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
EX19005	½" × ½" PEX F1960 HPP Coupling	25	600	ea.	\$ 3.151
EX19022	¾" × ¾" PEX F1960 HPP Coupling	25	300	ea.	\$ 3.861
EX19028	1" × 1" PEX F1960 HPP Coupling	10	100	ea.	\$ 6.204
EX19035	1-¼" × 1-¼" PEX F1960 HPP Coupling	1	50	ea.	\$ 14.718
EX19041	1-½" × 1-½" PEX F1960 HPP Coupling	1	50	ea.	\$ 16.149
EX19054	2" × 2" PEX F1960 HPP Coupling	1	50	ea.	\$ 74.159




PEX F1960 Reducing Couplings - **HPP** EX19200 Series

High Performance Polymer PEX F1960 reducing couplings. PEX-a expansion rings sold separately.

For complete specifications, see submittal [SUBEX19000](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
EX19225	¾" × ½" PEX F1960 HPP Coupling	25	300	ea.	\$ 6.179
EX19282	1" × ¾" PEX F1960 HPP Coupling	5	150	ea.	\$ 9.419
EX19238	1-¼" × 1" PEX F1960 HPP Coupling	1	50	ea.	\$ 12.986
EX19243	1-½" × 1-¼" PEX F1960 HPP Coupling	1	50	ea.	\$ 15.911
EX19248	1-½" × 1" PEX F1960 HPP Coupling	1	50	ea.	\$ 15.938
EX19264	2" × 1-½" PEX F1960 HPP Coupling	1	50	ea.	\$ 60.083



PEX F1960 Elbows - **No Lead Brass** EX28000NL Series

Solid no lead brass (C69300-EcoBrass) PEX F1960 × PEX F1960 elbows. PEX-a expansion rings sold separately.

For complete specifications, see submittal [SUBEX28000NL](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
EX28005NL	½" × ½" PEX F1960 No Lead Brass Elbow	25	250	ea.	\$ 11.580
EX28022NL	¾" × ¾" PEX F1960 No Lead Brass Elbow	25	250	ea.	\$ 19.529
EX28028NL	1" × 1" PEX F1960 No Lead Brass Elbow	10	100	ea.	\$ 30.830



PEX F1960 Elbows - **HPP** EX18000 Series

High Performance Polymer PEX F1960 elbows. PEX-a expansion rings sold separately.

For complete specifications, see submittal [SUBEX18000](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
EX18005	½" × ½" PEX F1960 HPP Elbow	25	500	ea.	\$ 3.745
EX18022	¾" × ¾" PEX F1960 HPP Elbow	25	300	ea.	\$ 4.760
EX18028	1" × 1" PEX F1960 HPP Elbow	10	100	ea.	\$ 9.971
EX18035	1-¼" × 1-¼" PEX F1960 HPP Elbow	1	50	ea.	\$ 22.218
EX18041	1-½" × 1-½" PEX F1960 HPP Elbow	1	50	ea.	\$ 29.700
EX18054	2" × 2" PEX F1960 HPP Elbow	1	50	ea.	\$ 108.119



PEX F1960 × MNPT Adapters - **No Lead Brass** EX27500NL Series

Solid brass no lead (C69300-EcoBrass) PEX F1960 × MNPT adapters. PEX-a expansion rings sold separately.

For complete specifications, see submittal [SUBEX27500NL](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
EX27505NL	½" PEX F1960 × ½" MNPT No Lead Brass Adapter	25	250	ea.	\$ 9.033
EX27522NL	¾" PEX F1960 × ¾" MNPT No Lead Brass Adapter	25	250	ea.	\$ 16.243
EX27528NL	1" PEX F1960 × 1" MNPT No Lead Brass Adapter	10	150	ea.	\$ 33.186
EX27535NL	1-¼" PEX F1960 × 1-¼" MNPT No Lead Brass Adapter	5	70	ea.	\$ 72.202
EX27541NL	1-½" PEX F1960 × 1-½" MNPT No Lead Brass Adapter	5	25	ea.	\$ 97.385
EX27554NL	2" PEX F1960 × 2" MNPT No Lead Brass Adapter	5	10	ea.	\$ 284.296

Note: 1-½" and larger fittings may be ordered in less than package quantities; no surcharge.



PEX F1960 × MNPT Adapters - **HPP** EX17500 Series

High Performance Polymer PEX F1960 × MNPT adapters. PEX-a expansion rings sold separately.

For complete specifications, see submittal [SUBEX17500](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
EX17505	½" PEX F1960 × ½" MNPT HPP Adapter	25	375	ea.	\$ 3.240
EX17552	½" PEX F1960 × ¾" MNPT HPP Adapter	25	350	ea.	\$ 4.156
EX17522	¾" PEX F1960 × ¾" MNPT HPP Adapter	25	300	ea.	\$ 5.372




PEX F1960 Drop Ear Elbows - **No Lead Brass** EX28300NL Series

Solid no lead brass (C69300-EcoBrass) ½" PEX F1960 × ½" FNPT drop ear elbow. PEX-a expansion rings sold separately.

For complete specifications, see submittal [SUBEX28300NL](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
EX28305NL	½" PEX F1960 × ½" FNPT Drop Ear No Lead Brass Elbow	10	160	ea.	\$ 23.568



PEX F1960 × FNPT Adapters - **No Lead Brass** EX27600NL Series

Solid no lead brass (C69300-EcoBrass) PEX F1960 × FNPT adapters. PEX-a expansion rings sold separately.

For complete specifications, see submittal [SUBEX27600NL](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
EX27605NL	½" PEX F1960 × ½" FNPT No Lead Brass Adapter	25	400	ea.	\$ 17.573
EX27622NL	¾" PEX F1960 × ¾" FNPT No Lead Brass Adapter	25	300	ea.	\$ 20.376
EX27628NL	1" PEX F1960 × 1" FNPT No Lead Brass Adapter	25	150	ea.	\$ 42.925
EX27635NL	1-¼" PEX F1960 × 1-¼" FNPT No Lead Brass Adapter	5	70	ea.	\$ 77.912
EX27641NL	1-½" PEX F1960 × 1-½" FNPT No Lead Brass Adapter	5	35	ea.	\$ 157.609

Note: 1-½" and larger fittings may be ordered in less than package quantities; no surcharge.



PEX F1960 × Swivel Adapters - **HPP** 17700 Series

High Performance Polymer PEX F1960 × swivel adapters. PEX-a expansion rings sold separately.

For complete specifications, see submittal [SUBEX17700](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
EX17755	½" PEX F1960 × ½" Swivel HPP Adapter	25	400	ea.	\$ 5.928



PEX F1960 × Male Sweat Adapters - No Lead Brass
27100NL Series


Solid no lead brass (C69300-EcoBrass) PEX F1960 × male sweat adapters. PEX-a expansion rings sold separately.

Not intended for use with copper press fittings.

For complete specifications, see submittal [SUBEX27000NL](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
EX27105NL	½" PEX F1960 × ½" M/Sweat No Lead Brass Adapter	25	700	ea.	\$ 6.126
EX27122NL	¾" PEX F1960 × ¾" M/Sweat No Lead Brass Adapter	25	400	ea.	\$ 13.407
EX27128NL	1" PEX F1960 × 1" M/Sweat No Lead Brass Adapter	10	200	ea.	\$ 25.909
EX27135NL	1-¼" PEX F1960 × 1-¼" M/Sweat No Lead Brass Adapter	5	40	ea.	\$ 54.483
EX27141NL	1-½" PEX F1960 × 1-½" M/Sweat No Lead Brass Adapter	5	30	ea.	\$ 89.544
EX27154NL	2" PEX F1960 × 2" M/Sweat No Lead Brass Adapter	5	20	ea.	\$ 247.828

Note: 1-½" and larger fittings may be ordered in less than package quantities; no surcharge.



PEX F1960 × Female Sweat Adapters - No Lead Brass
27200NL Series

Solid no lead brass (C69300-EcoBrass) PEX F1960 × female sweat adapters. PEX-a expansion rings sold separately.

Not intended for use with copper press fittings.


For complete specifications, see submittal [SUBEX27000NL](#).

New!

New!

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
EX27205NL	½" PEX F1960 × ½" F/Sweat No Lead Brass Adapter	25	700	ea.	\$ 6.261
EX27222NL	¾" PEX F1960 × ¾" F/Sweat No Lead Brass Adapter	25	400	ea.	\$ 14.250
EX27228NL	1" PEX F1960 × 1" F/Sweat No Lead Brass Adapter	10	200	ea.	\$ 23.732
EX27235NL	1-¼" PEX F1960 × 1-¼" F/Sweat No Lead Brass Adapter	5	70	ea.	\$ 64.761
EX27241NL	1-½" PEX F1960 × 1-½" F/Sweat No Lead Brass Adapter	5		ea.	\$ 99.230
EX27254NL	2" PEX F1960 × 2" F/Sweat No Lead Brass Adapter	5		ea.	\$ 263.330

Note: 1-½" and larger fittings may be ordered in less than package quantities; no surcharge.




PEX F1960 Tees - **No Lead Brass** EX26000NL Series

Solid no lead brass (C69300-EcoBrass) PEX F1960 tees. PEX-a expansion rings sold separately.

For complete specifications, see submittal [SUBEX26000NL](#).

Stk#	Description (run × run × branch)	Pkg Qty	Carton Qty	Unit	List Price / Unit
EX26555NL	½" × ½" × ½" PEX F1960 No Lead Brass Tee	25	250	ea.	\$ 16.654
EX26222NL	¾" × ¾" × ¾" PEX F1960 No Lead Brass Tee	25	250	ea.	\$ 27.372
EX26888NL	1" × 1" × 1" PEX F1960 No Lead Brass Tee	10	100	ea.	\$ 47.207



PEX F1960 Reducing Tees - **No Lead Brass** EX26000NL Series

Solid no lead brass (C69300-EcoBrass) PEX F1960 tees. PEX-a expansion rings sold separately.

For complete specifications, see submittal [SUBEX26000NL](#).

Stk#	Description (run × run × branch)	Pkg Qty	Carton Qty	Unit	List Price / Unit
EX26225NL	¾" × ¾" × ½" PEX F1960 No Lead Brass Tee	25	250	ea.	\$ 27.275
EX26252NL	¾" × ½" × ¾" PEX F1960 No Lead Brass Tee	25	250	ea.	\$ 22.958
EX26255NL	¾" × ½" × ½" PEX F1960 No Lead Brass Tee	25	250	ea.	\$ 23.253
EX26822NL	1" × ¾" × ¾" PEX F1960 No Lead Brass Tee	5	100	ea.	\$ 49.645
EX26882NL	1" × 1" × ¾" PEX F1960 No Lead Brass Tee	5	100	ea.	\$ 50.512
EX26885NL	1" × 1" × ½" PEX F1960 No Lead Brass Tee	10	100	ea.	\$ 49.453




PEX F1960 Tees - **HPP** EX16000 Series

High Performance Polymer PEX F1960 tees. PEX-a expansion rings sold separately.

For complete specifications, see submittal [SUBEX16000](#).

Stk#	Description (run × run × branch)	Pkg Qty	Carton Qty	Unit	List Price / Unit
EX16555	½" × ½" × ½" PEX F1960 HPP Tee	25	250	ea.	\$ 3.812
EX16222	¾" × ¾" × ¾" PEX F1960 HPP Tee	25	100	ea.	\$ 6.074
EX16888	1" × 1" × 1" PEX F1960 HPP Tee	10	60	ea.	\$ 11.131
EX16333	1-¼" × 1-¼" × 1-¼" PEX F1960 HPP Tee	1	50	ea.	\$ 24.944
EX16444	1-½" × 1-½" × 1-½" PEX F1960 HPP Tee	1	50	ea.	\$ 36.779
EX16666	2" × 2" × 2" PEX F1960 HPP Tee	1	50	ea.	\$ 130.423



PEX F1960 Reducing Tees - *HPP* EX16000 Series

High Performance Polymer PEX F1960 reducing tees. PEX-a expansion rings sold separately.

For complete specifications, see submittal [SUBEX16000](#).

Stk#	Description (run × run × branch)	Pkg Qty	Carton Qty	Unit	List Price / Unit
EX16255	¾" × ½" × ½" PEX F1960 HPP Tee	25	200	ea.	\$ 5.753
EX16225	¾" × ¾" × ½" PEX F1960 HPP Tee	25	175	ea.	\$ 5.079
EX16252	¾" × ½" × ¾" PEX F1960 HPP Tee	25	150	ea.	\$ 5.959
EX16552	½" × ½" × ¾" PEX F1960 HPP Tee	25	200	ea.	\$ 13.869
EX16822	1" × ¾" × ¾" PEX F1960 HPP Tee	5	75	ea.	\$ 9.859
EX16828	1" × ¾" × 1" PEX F1960 HPP Tee	5	60	ea.	\$ 11.635
EX16882	1" × 1" × ¾" PEX F1960 HPP Tee	5	75	ea.	\$ 11.198
EX16885	1" × 1" × ½" PEX F1960 HPP Tee	10	90	ea.	\$ 10.284
EX16332	1-¼" × 1-¼" × ¾" PEX F1960 HPP Tee	1	50	ea.	\$ 23.216
EX16335	1-¼" × 1-¼" × ½" PEX F1960 HPP Tee	1	50	ea.	\$ 17.905
EX16338	1-¼" × 1-¼" × 1" PEX F1960 HPP Tee	1	50	ea.	\$ 23.827
EX16382	1-¼" × 1" × ¾" PEX F1960 HPP Tee	1	50	ea.	\$ 19.757
EX16388	1-¼" × 1" × 1" PEX F1960 HPP Tee	1	50	ea.	\$ 23.389
EX16432	1-½" × 1-¼" × ¾" PEX F1960 HPP Tee	1	50	ea.	\$ 33.310
EX16433	1-½" × 1-¼" × 1-¼" PEX F1960 HPP Tee	1	50	ea.	\$ 36.851
EX16438	1-½" × 1-¼" × 1" PEX F1960 HPP Tee	1	50	ea.	\$ 34.579
EX16442	1-½" × 1-½" × ¾" PEX F1960 HPP Tee	1	50	ea.	\$ 30.934
EX16443	1-½" × 1-½" × 1-¼" PEX F1960 HPP Tee	1	50	ea.	\$ 33.418
EX16448	1-½" × 1-½" × 1" PEX F1960 HPP Tee	1	50	ea.	\$ 31.907
EX16488	1-½" × 1" × 1" PEX F1960 HPP Tee	1	50	ea.	\$ 29.466
EX16642	2" × 1-½" × ¾" PEX F1960 HPP Tee	1	50	ea.	\$ 108.482
EX16643	2" × 1-½" × 1-¼" PEX F1960 HPP Tee	1	50	ea.	\$ 113.302
EX16644	2" × 1-½" × 1-½" PEX F1960 HPP Tee	1	50	ea.	\$ 124.112
EX16648	2" × 1-½" × 1" PEX F1960 HPP Tee	1	50	ea.	\$ 99.327
EX16662	2" × 2" × ¾" PEX F1960 HPP Tee	1	50	ea.	\$ 108.125
EX16663	2" × 2" × 1-¼" PEX F1960 HPP Tee	1	50	ea.	\$ 112.690
EX16664	2" × 2" × 1-½" PEX F1960 HPP Tee	1	50	ea.	\$ 128.727
EX16668	2" × 2" × 1" PEX F1960 HPP Tee	1	50	ea.	\$ 107.628



PEX F1960 Ball Valves - **No Lead Brass** EX23300NL Series

No lead brass PEX F1960 × PEX F1960 full port straight ball valves with lever handle. PEX-a expansion rings sold separately.

For complete specifications, see submittal [SUBEX23300NL](#).

Now available!

	Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
New!	EX23305NL	½" PEX F1960 No Lead Brass Ball Valve, Full Port	10	120	ea.	\$ 15.320
New!	EX23322NL	¾" PEX F1960 No Lead Brass Ball Valve, Full Port	10	80	ea.	\$ 24.220
New!	EX23328NL	1" PEX F1960 No Lead Brass Ball Valve, Full Port	6	48	ea.	\$ 40.340
New!	EX23335NL	1-¼" PEX F1960 No Lead Brass Ball Valve, Full Port	4	24	ea.	\$ 64.660
New!	EX23341NL	1-½" PEX F1960 No Lead Brass Ball Valve, Full Port	2	16	ea.	\$ 89.540
New!	EX23354NL	2" PEX F1960 No Lead Brass Ball Valve, Full Port	2	12	ea.	\$ 168.180




PEX F1960 × MNPT Ball Valves - **No Lead Brass** EX23800NL Series

No lead brass PEX F1960 × MNPT straight ball valves with butterfly handle. PEX-a expansion rings sold separately.

For complete specifications, see submittal [SUBEX23800NL](#).

Now available!

	Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
New!	EX23822NL	¾" PEX F1960 × ¾" MNPT No Lead Brass Ball Valve	10	80	ea.	\$ 25.850

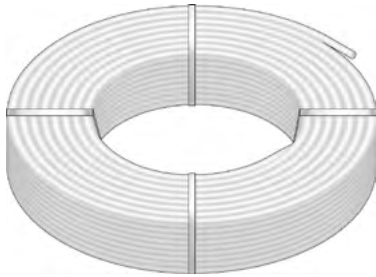

PEX-a Tubing Coils with O₂ Barrier 94000 Series

High molecular cross-linked polyethylene (PEX-a) with minimum bending radii of 6× the diameter at 68°F (20°C). Maximum operating temperature: 180°F @ 100 PSI (82°C @ 690 kPa). Covered by a twenty-five year manufacturer's limited warranty. Comes with oxygen diffusion barrier which prevents oxygen from entering the heating system through the tubing wall. For complete specifications, see submittal [SUB94000](#).

WSL

Stk#	Description	Pkg Qty	Skid Qty	Unit	List Price / Unit
94205	½" 250ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing	1	48	coil	\$ 364.75
94305	½" 300ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing	1	48	coil	\$ 437.70
94505	½" 500ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing	1	32	coil	\$ 729.50
94105	½" 1000ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing	1	16	coil	\$ 1,459.00
94319	⅝" 300ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing	1	32	coil	\$ 597.00
94019400	⅝" 400ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing	1	16	coil	\$ 796.00
94519	⅝" 500ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing	1	16	coil	\$ 995.00
94119	⅝" 1000ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing	1	12	coil	\$ 1,990.00
94322	¾" 300ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing	1	16	coil	\$ 758.10
94522	¾" 500ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing	1	12	coil	\$ 1,263.50
94122	¾" 1000ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing	1	7	coil	\$ 2,527.00
94128	1" 100ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing	1	28	coil	\$ 449.70
94528	1" 500ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing	1	7	coil	\$ 2,248.50
94135	1-¼" 100ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing	1	12	coil	\$ 719.30
94335	1-¼" 300ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing	1	7	coil	\$ 2,157.90
94141	1-½" 100ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing	1	10	coil	\$ 997.90
94341	1-½" 300ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing	1	7	coil	\$ 2,993.70



PEX-a Tubing Straight Lengths with O₂ Barrier 94000 Series

High molecular cross-linked polyethylene (PEX-a) with minimum bending radii of 6× the diameter at 68°F (20°C). Maximum operating temperature: 180°F @ 100 PSI (82°C @ 690 kPa). Covered by a twenty-five year manufacturer's limited warranty. Comes with oxygen diffusion barrier which prevents oxygen from entering the heating system through the tubing wall.

For complete specifications, see submittal [SUB94000](#).

Stk#	Description	Pkg Qty	Master Bag	Unit	List Price / Unit
94222	¾" 10×20ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing	1	20	bundle	\$ 505.40
94228	1" 5×20ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing	1	20	bundle	\$ 449.70
94235	1-¼" 5×20ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing	1	15	bundle	\$ 719.30
94241	1-½" 5×20ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing	1	10	bundle	\$ 997.90

HeatLink® O₂ Barrier Pipe-in-Pipe 94000 Sheathed Series

PEX-a carrier tubing specified on previous pages. The flexible, impact resistant red PP sheath designed as a raceway for electrical installations provides mechanical and UV protection to the PEX-a carrier tubing. The sheath allows for easy replacement of the PEX-a carrier tubing if needed.

For complete specifications, see submittal [SUB94000rs](#).

Minimum bending radius @ 68°F (20°C) for: ½" = 3" (77 mm)


PP sheath is rated to UL94HB "Tests for Flammability of Plastic Materials."

Corrugated sheath outside diameter for: ½" = 0.93" (23.6 mm)



	Stk#	Description	Pkg Qty	Skid Qty	Unit	List Price / Unit
Special Order*	94305rs	½" 300' O ₂ Barrier HeatLink® Pipe-in-Pipe Red Sheath	1	18	coil	\$ 681.60
Special Order*	94322rs	¾" 300' O ₂ Barrier HeatLink® Pipe-in-Pipe Red Sheath	1	9	coil	\$ 1,153.50

* Lead time may vary. Call to confirm time line.

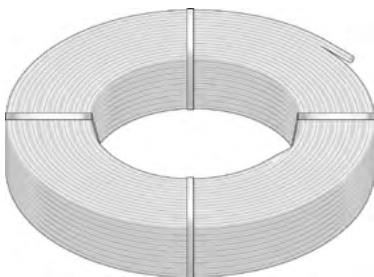

Non Barrier PEX-a Tubing Coils 20000 Series


High molecular cross-linked polyethylene (PEX-a) with minimum bending radii of 6× the diameter at 68°F (20°C). Maximum operating temperature: 180°F @ 100 PSI (82°C @ 690 kPa). Covered by a twenty-five year manufacturer's limited warranty.

For complete specifications, see submittal [SUB20000](#).

Stk#	Description	Pkg Qty	Skid Qty	Unit	List Price / Unit
20305	½" 300ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	48	coil	\$ 312.30
20505	½" 500ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	32	coil	\$ 520.50
20905	½" 1000ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	20	coil	\$ 1,041.00
20322	¾" 300ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	21	coil	\$ 543.00
20522	¾" 500ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	12	coil	\$ 905.00
20128	1" 100ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	28	coil	\$ 352.10
20328	1" 300ft Blue PureLink® Plus UV Stabilized PEX-a Tubing	1	11	coil	\$ 1,056.30

Features & Benefits :

- Modular “tool-less” assembly.
- Multiple configurations, all interchangeable; can be reconfigured on-site.
- Unlike a fixed loop manifold, loops can be added or removed as required.
- Stock is flexible, as there is no need to stock fixed-length manifolds. Minimal SKUs on the shelf.
- Balancing return.
- Zone valve supply with manual shut-off; accepts optional actuators.
- Max. trunk flow rate:
79400 kit - 18 US gpm (4.1 m³/h)
- Max. circuit flow rate:
2.5 US gpm (0.57 m³/h)
- ½", ⅝", and ¾" PEX to manifold connectors available.
- Test rated to over 230 PSI @ 180°F water temperature.
- 5 year limited warranty.

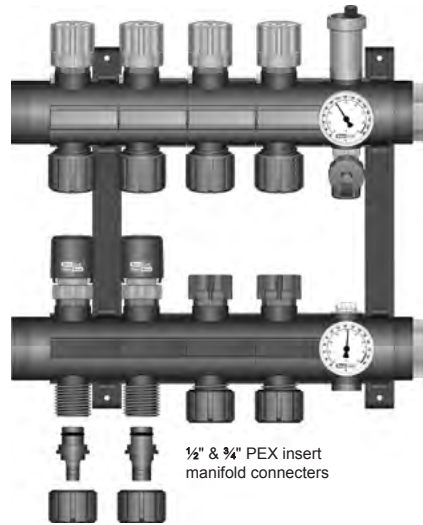

(79400 assembly kit shown with 4× 78400 module pairs and 2 actuators)

Typical Applications:

- Commercial.
- Snow melting.

Assembly Kit	# of Loops	Modules	Additional Brackets	Recommended Housing*	
				Recessed**	Surface Mount with Rails
79400	2	2× 78400	-	71724	72434
	3	3× 78400	-	71724	72434
	4	4× 78400	-	71724	72434
	5	5× 78400	-	71730	72434
	6	6× 78400	1× 79991	71730	72434
	7	7× 78400	1× 79991	71743	72434
	8	8× 78400	1× 79991	71743	72434
	9	9× 78400	2× 79991	71743	72442
	10	10× 78400	2× 79991	71743	72442
	11	11× 78400	2× 79991	71743	72442
	12	12× 78400	3× 79991	n/a	72442
Actuator Selection					
Actuator with LED		56200			
Actuator with End Switch		56230			

Tubing Size	Tubing to Manifold Connectors / Loop		Conduit Elbows / Loop for “Wet” Installation
	Compression	PEX Insert	
½"	77005	2× 23015	2× 86005
⅝"	77019	n/a	2× 86020
¾"	77022	2× 23032	2× 86022

* Recommended housing based on 79400 kit and 90° mains piping.

** Thermometers must be removed.



TwistSeal® (55 mm) Deluxe Manifold Assembly Kit Stk# 79400

This package contains the items needed to assemble a Deluxe TwistSeal® Manifold. Contents include:

- 2 mounting brackets
- 2 - 1" FNPT supply end connections
- 2 closed end caps
- 1 lube bottle
- 2 cross tees c/w 3 - 1/2" cross tee plugs
- 1 thermometer pair c/w wells
- 1 manual air vent with 1 key
- 1 automatic air vent
- 1 hose bib
- 1 wrench for plastic nut

For complete specifications, see submittal [SUB79400](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
79400	1" TwistSeal® (55mm) Deluxe Manifold Assembly Kit	1		ea.	\$ 567.92



Mounting Bracket (55 mm) Stk# 79991

Plastic mounting bracket which allows easy 'snap-on' mounting of manifolds.

- 1 additional bracket should be used on 6 to 8 loop manifolds.
- 2 additional brackets should be used on 9 to 11 loop manifolds.
- 3 additional brackets should be used on 12 loop manifolds.

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
79991	TwistSeal® (55mm) Mounting Bracket	1		ea.	\$ 27.52



TwistSeal® Deluxe (55 mm) Supply / Return Modules c/w Heavy Duty Zone Valve Supply & Balancing Return Stk# 78400

The supply module provides on/off manual control to allow isolation of individual loops, and may be fitted for electric actuator and thermostat operation. The return module permits the balancing of the flow rate. Comes with o-rings. Modules can be locked in place with a couple of turns. No threaded rod, solder, or tools required. Just twist and seal.

For complete specifications, see submittal [SUB79400](#).


Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
78400	TwistSeal® Deluxe (55mm) Z.V. Supply & Balancing Return Module Pair	1	10	pair	\$ 208.20

Features & Benefits :

- Modular “tool-less” assembly.
- Multiple configurations ,all interchangeable; can be reconfigured on-site.
- Unlike a fixed loop manifold, loops can be added or removed as required.
- Stock is flexible, as there is no need to stock fixed-length manifolds. Minimal SKUs on the shelf.
- Maximum trunk flow rate: 11 US gpm (2.5 m³/h)
- Maximum circuit flow rate:
7830x - 1 US gpm (0.23 m³/h)
78200 - 1.25 US gpm (0.28 m³/h)
- ½", ⅝", and ¾" PEX to manifold connectors available.
- Test rated to over 230 PSI @ 180°F water temperature.
- 5 year limited warranty.

Typical Applications:


- Residential.
- Small commercial.

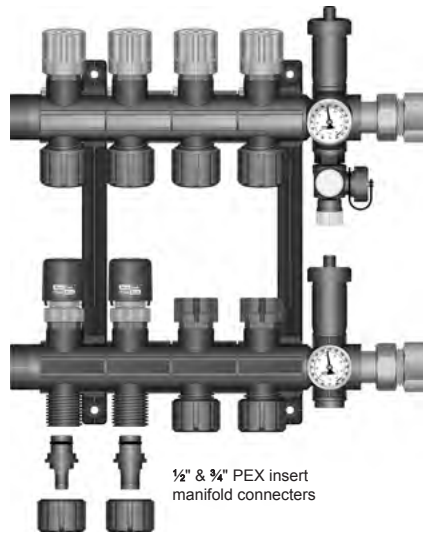

(79200 assembly kit shown with 78200 module pairs and 2 actuators)

78200 Module Specific Features:

- Flow balancing return.
- Zone valve supply with manual shut-off; accepts optional actuators.

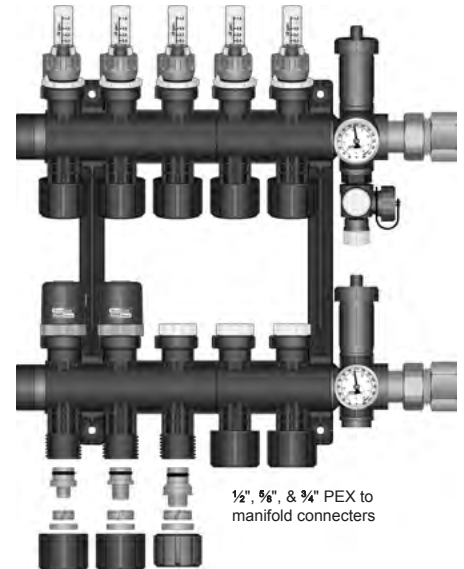

(79200 assembly kit shown with 78302 and 78303 module pairs and 2 actuators)

7830x Module Specific Features:

- Lockable balancing return with 0.4 - 1 US gpm (1.5 - 3.8 L/min) flow meter.
- Zone valve supply with manual shut-off; accepts optional actuators.

Assembly Kit	# of Loops	Choose Module Type		Additional Brackets	Recommended Housing*	
		Balancing	Multipoint Flow Meter		Recessed	Surface Mount with Rails
79200	2	2× 78200	1× 78302	-	71724	72434
	3	3× 78200	1× 78303	-	71724	72434
	4	4× 78200	2× 78302	-	71724	72434
	5	5× 78200	1× 78302 1× 78303	-	71730	72434
	6	6× 78200	2× 78303	1× 79892	71730	72434
	7	7× 78200	2× 78302 1× 78303	1× 79892	71730	72434
	8	8× 78200	1× 78302 2× 78303	1× 79892	71743	72434
	9	9× 78200	3× 78303	2× 79892	71743	72442
	10	10× 78200	2× 78302 2× 78303	2× 79892	71743	72442
	11	11× 78200	1× 78302 3× 78303	2× 79892	71743	72442
	12	12× 78200	4× 78303	3× 79892	71743	72442
	Actuator Selection					
	Actuator with LED	56200	56202			
	Actuator with End Switch	56230	56232			

Tubing Size	Tubing to Manifold Connectors / Loop		Conduit Elbows / Loop for “Wet” Installation
	Compression	PEX Insert	
½"	77005	2× 23015	2× 86005
⅝"	77019	n/a	2× 86020
¾"	77022	2× 23032	2× 86022

* Recommended housing based on 79200 kit and 90° mains piping



TwistSeal® Mini (40 mm) Deluxe Manifold Assembly Kit Stk# 79200

This package contains the items needed to assemble a mini deluxe heating manifold. Contents include:

- 2 mounting brackets
- 2 - 1" union cross tee end connection c/w green fibre gasket
- 2 - 1" MBSP x 1" FNPT adapter
- 2 red rubber gaskets for air testing
- 2 closed end caps
- 1 - 1/2" cross tee plug
- 1 thermometer pair
- 2 automatic air vents
- 1 hose bib
- 1 lubricant package

For complete specifications, see submittal [SUB78200](#) or [SUB78300](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
79200	1" TwistSeal® Mini (40mm) Deluxe Manifold Assembly Kit	1		ea.	\$ 257.27




Mini Mounting Bracket (40 mm) Stk# 79892

Plastic mounting bracket which allow easy 'snap-on' mounting of manifolds. Offset provides tubing passage behind second manifold.

- 1 additional bracket should be used on 6 to 8 loop manifolds.
- 2 additional brackets should be used on 9 to 11 loop manifolds.
- 3 additional brackets should be used on 12 loop manifolds.


Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
79892	TwistSeal® Multiport (40mm) Double Mounting Bracket	1	20	ea.	\$ 22.61


**TwistSeal® Mini Deluxe (40 mm) Supply / Return Modules
c/w Heavy Duty Zone Valve Supply & Balancing Return
Stk# 78200**

The supply module provides on/off manual control to allow isolation of individual loops. The return module permits balancing of the flow rate with flow setting dial. Comes with o-rings.

For complete specifications, see submittal [SUB78200](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
78200	TwistSeal® Mini Deluxe (40mm) Z.V. Supply & Balancing Return Module Pair	1	10	pair	\$ 161.91

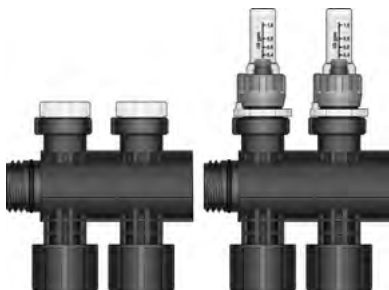
**TwistSeal® Mini (40 mm) Multiport Zone Valve Supply &
Flow Meter Balancing Return Module Pair
78300 Series**

The supply module provides on/off manual control to allow isolation of individual loops. The return module permits visual balancing of the flow rate with the flow meter. Comes with o-rings.

For complete specifications, see submittal [SUB78300](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
78302	TwistSeal® Mini (40mm) 2-port Z.V. Supply & Flow Meter Return Module Pair	1	6	pair	\$ 254.97
78303	TwistSeal® Mini (40mm) 3-port Z.V. Supply & Flow Meter Return Module Pair	1	4	pair	\$ 382.42



PEX Connectors for TwistSeal® Manifolds 77000 Series

Solid brass fitting attaches to the end of the PEX tubing and allows for easy installation onto the bottom of the manifold module. Comes with o-ring.

For complete specifications, see submittal [SUB77000](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
77005	1/2" PEX to TwistSeal® Manifold Connector	1	10	pair	\$ 25.38
77019	5/8" PEX to TwistSeal® Manifold Connector	1	10	pair	\$ 33.89
77022	3/4" PEX to TwistSeal® Manifold Connector c/w Nut	1		pair	\$ 55.28



PEX Insert Connectors for TwistSeal® Manifold 23000 Series

Plastic fitting is installed into the bottom of the manifold module and is held in place by the nut. The tubing is then pressed on to this fitting. Comes with o-ring. SS press sleeves sold separately ([page 12](#)). *Not for potable water use.*

For complete specifications, see submittal [SUB23000](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
23015	1/2" PEX Insert Manifold Connector	5		ea.	\$ 5.48
23032	3/4" PEX Insert Manifold Connector c/w Nut	5		ea.	\$ 10.27




1-1/4" Stainless Steel Manifolds

Common Features:

- Preassembled configurations from 2 to 12 loops.
- Integrated 1" FNPT isolation valves and hosebibs.
- Zone valve return balancing with manual shut-off; accepts optional actuators.
- Maximum trunk flow rate: 18 US gpm (4.1 m³/h)
- 1/2", 5/8", and 3/4" PEX connectors available.

76100 Series

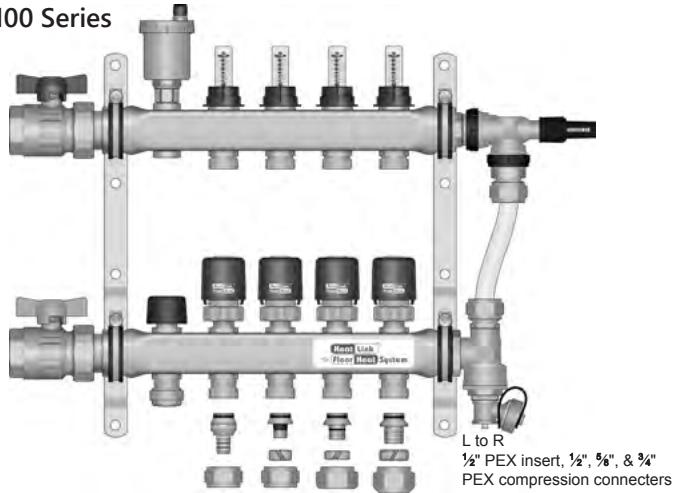

(76105 - 5 loop model shown with 4 actuators, automatic air vent, 1/2" plug, port cap, and pressure bypass valve)

Model Specific Features:


- Maximum circuit flow rate: 1.5 US gpm (0.34 m³/h)
- Balancing supply with 0-1.5 US gpm (0-5 L/min) flow meter.

Typical Applications:

- Residential.
- Small commercial.

# of Loops	Recommended Housing*	
	Recessed	Surface Mount with Rails
2	71724	72434
3	71724	72434
4	71730	72434
5	71730	72434
6	71730	72434
7	71743	72434
8	71743	72434
9	71743	72434
10	71743	72442
11	71743	72442
12	71743	72442

76200 Series

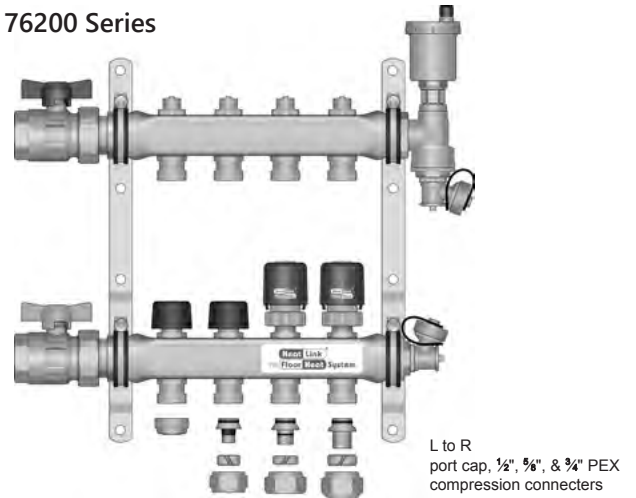

(76204 - 4 loop model shown with 2 actuators and side mount automatic air vent)

Model Specific Features:

- Maximum circuit flow rate: 2.5 US gpm (0.57m³/h)
- Balancing supply.


Typical Applications:

- Commercial.
- Snow melting.

Tubing Size	PEX Connecters / Loop		Conduit Elbows / Loop for "Wet" Installation
	Compression	Insert	
1/2"	77105	77305	2× 86005
5/8"	77119	n/a	2× 86020
3/4"	77122	n/a	2× 86022

Manifold Series	Actuator with LED	Actuator with End Switch	DDC Actuator
1-1/4" Stainless Steel (76100 or 76200 series)	56201	56231	56121

* Recommended housing based on 90° mains piping

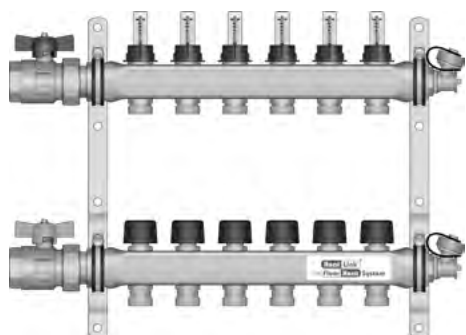

1-1/4" Stainless Steel Manifolds with Flow Meters 76100 Series


Manifold includes:

- 1 assembled flow balancing supply manifold with 1" FNPT isolation valve and hose bib/air vent.
- 1 assembled balancing shut-off return manifold with 1" FNPT isolation valve and hose bib/air vent.
- 2 mounting brackets.

PEX connectors & port caps sold separately.

For complete specifications, see submittal [SUB76100](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
76102	2 Loop SS Manifold with Flow Meters	1		ea.	\$ 621.41
76103	3 Loop SS Manifold with Flow Meters	1		ea.	\$ 717.15
76104	4 Loop SS Manifold with Flow Meters	1		ea.	\$ 860.42
76105	5 Loop SS Manifold with Flow Meters	1		ea.	\$ 989.54
76106	6 Loop SS Manifold with Flow Meters	1		ea.	\$ 1,100.00
76107	7 Loop SS Manifold with Flow Meters	1		ea.	\$ 1,219.62
76108	8 Loop SS Manifold with Flow Meters	1		ea.	\$ 1,362.49
76109	9 Loop SS Manifold with Flow Meters	1		ea.	\$ 1,541.73
76110	10 Loop SS Manifold with Flow Meters	1		ea.	\$ 1,720.99
76111	11 Loop SS Manifold with Flow Meters	1		ea.	\$ 1,875.91
76112	12 Loop SS Manifold with Flow Meters	1		ea.	\$ 2,031.53

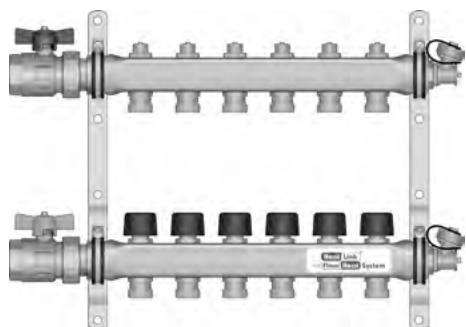

1-1/4" High Flow Stainless Steel Manifolds 76200 Series

Manifold includes:

- 1 assembled balancing supply manifold with 1" FNPT isolation valve and hose bib/air vent.
- 1 assembled balancing shut-off return manifold with 1" FNPT isolation valve and hose bib/air vent.
- 2 mounting brackets.

PEX connectors & port caps sold separately.

For complete specifications, see submittal [SUB76200](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
76202	2 Loop High Flow SS Manifold	1		ea.	\$ 598.92
76203	3 Loop High Flow SS Manifold	1		ea.	\$ 682.91
76204	4 Loop High Flow SS Manifold	1		ea.	\$ 815.38
76205	5 Loop High Flow SS Manifold	1		ea.	\$ 932.59
76206	6 Loop High Flow SS Manifold	1		ea.	\$ 1,031.91
76207	7 Loop High Flow SS Manifold	1		ea.	\$ 1,140.50
76208	8 Loop High Flow SS Manifold	1		ea.	\$ 1,272.98
76209	9 Loop High Flow SS Manifold	1		ea.	\$ 1,438.98
76210	10 Loop High Flow SS Manifold	1		ea.	\$ 1,607.03
76211	11 Loop High Flow SS Manifold	1		ea.	\$ 1,752.15
76212	12 Loop High Flow SS Manifold	1		ea.	\$ 1,896.87




Port Caps for 1-1/4" Stainless Steel Manifolds

Stk# 77100

Caps off unused ports on the 1-1/4" Stainless Steel Manifold. Includes fiber gasket.

For complete specifications, see submittal [SUB77100](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
77100	Port Cap for 1-1/4" SS Manifold	1	10	pair	\$ 23.62




PEX Compression Connectors for 1-1/4" Stainless Steel Manifolds 77100 Series

Solid brass fitting attaches to the end of the PEX tubing and allows for easy installation onto the bottom of the 1-1/4" SS manifold. Comes with o-ring.

For complete specifications, see submittal [SUB77100](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
77105	1/2" PEX to 1-1/4" SS Manifold Connector	1	10	pair	\$ 31.55
77119	5/8" PEX to 1-1/4" SS Manifold Connector	1	10	pair	\$ 40.67
77122	3/4" PEX to 1-1/4" SS Manifold Connector	1	10	pair	\$ 78.82



PEX Insert Connectors for 1-1/4" Stainless Steel Manifolds 77300 Series

Solid brass fitting is installed into the bottom of the manifold and is held in place by the nut. The tubing is then pressed on to this fitting. Comes with o-ring. SS press sleeves sold separately ([page 12](#)). *Not for potable water use.*

For complete specifications, see submittal [SUB77300](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
77305	1/2" PEX Insert to 1-1/4" SS Manifold Connector	1		pair	\$ 32.56



Coupling for 1-1/4" Stainless Steel Manifold

Stk# 76100

Used to connect 1-1/4" SS manifolds together. Comes with o-rings.

For complete specifications, see submittal [SUB76100](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
76100	Coupling for SS Manifold	1		ea.	\$ 58.18



1/2" Plug for 1-1/4" Stainless Steel Manifold

Stk# 76905

Plug to seal 1-1/4" SS manifold outlet. Comes with o-ring.

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
76905	1/2" Plug for 1-1/4" SS Manifold	1		ea.	\$ 11.80



Automatic Air Vent for Stainless Steel Manifold Stk# 76932

Add an automatic air vent to the 1-1/4" SS manifold by replacing a valve or 2" SS manifold by replacing a hose bib. Comes with o-ring.

For complete specifications, see submittal [SUB76932](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
76932	Automatic Air Vent for 1-1/4" SS Manifold	1		ea.	\$ 53.63




Side Mount Automatic Air Vent Set for 1-1/4" Stainless Steel Manifold Stk# 76935

Add an automatic air vent to the 1-1/4" SS manifold without occupying a loop. Comes with o-ring.

Side Mount Automatic Air Vent is not compatible with the Pressure Bypass Kit (#76937).

For complete specifications, see submittal [SUB76935](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
76935	Side Mount Automatic Air Vent Set for 1-1/4" SS Manifold	1		ea.	\$ 130.07

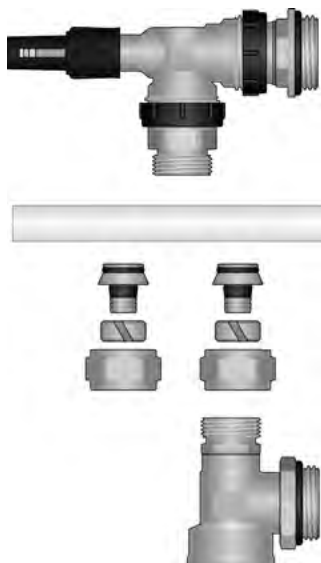

Pressure Bypass Kit for 1-1/4" Stainless Steel Manifold Stk# 76937

This valve prevents a steep rise of the pump head and maintains flow at a stable rate. Also ensures only required amount of circulating water is used for hydronic systems. The valve can be adjusted to any point between 0.05 and 0.5 bar (1.67 and 16.7 ft H₂O). Comes with o-rings.

Pressure Bypass Kit is not compatible with the Side Mount Automatic Air Vent Set (#76935).

For complete specifications, see submittal [SUB76937](#).


Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
76937	Pressure Bypass Kit for 1-1/4" SS Manifold	1		ea.	\$ 400.97

Features:

- Preassembled configurations from 4 to 14 loops.
- Ball valve isolation for each loop.
- 1-½" and 2" MNPT open end adapters.
- Maximum trunk flow rate: 50 US gpm (11.4 m³/h).
- Branch pair Cv = 6.
- ½", ¾", and 1" PEX connectors.

Typical Applications:

- Large commercial.
- Snow melting.
- Distribution header.

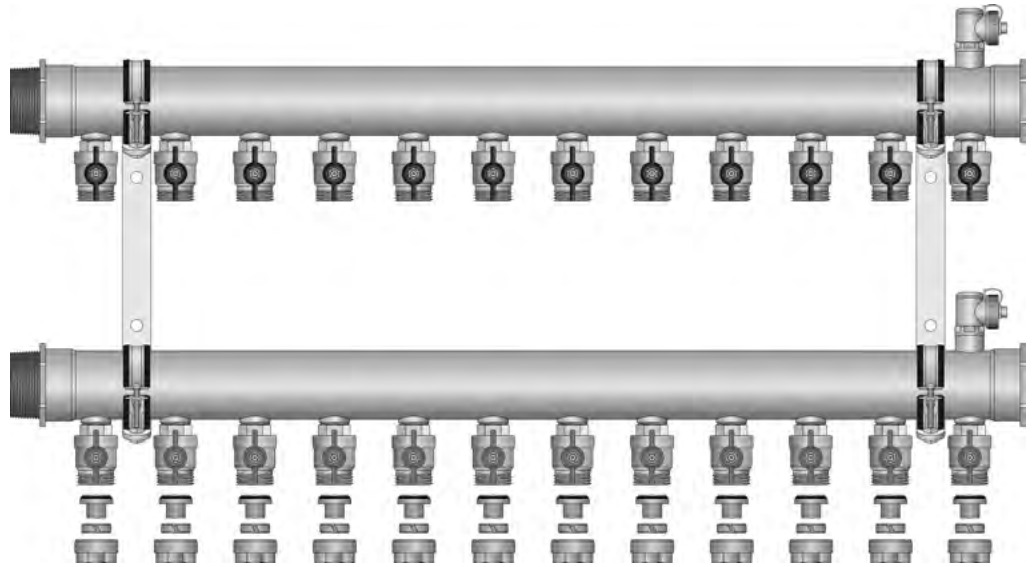

(76612 - 12 loop model shown with 2" MNPT Assembly Kit, and ¾" PEX connectors)



2" Stainless Steel Manifolds 76600 Series


Manifold includes:

- 1 assembled supply manifold with ball valves and hose bib/air vent.
- 1 assembled return manifold with ball valves and hose bib/air vent.
- 2 mounting brackets.

Assembly Kit and PEX connectors sold separately.

For complete specifications, see submittal [SUB76604](#).

	Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
WSL	76604	4 Loop 2" SS Manifold	1		ea.	\$ 1,177.36
WSL	76605	5 Loop 2" SS Manifold	1		ea.	\$ 1,340.74
	76606	6 Loop 2" SS Manifold	1		ea.	\$ 2,201.14
WSL	76607	7 Loop 2" SS Manifold	1		ea.	\$ 1,693.64
	76608	8 Loop 2" SS Manifold	1		ea.	\$ 2,687.97
WSL	76609	9 Loop 2" SS Manifold	1		ea.	\$ 2,047.19
	76610	10 Loop 2" SS Manifold	1		ea.	\$ 3,244.65
WSL	76611	11 Loop 2" SS Manifold	1		ea.	\$ 2,331.28
	76612	12 Loop 2" SS Manifold	1		ea.	\$ 3,679.38
	76614	14 Loop 2" SS Manifold	1		ea.	\$ 3,813.46



Coupling for 2" SS Manifold Stk# 76600

Couple 2" SS Manifolds together. Loctite 55 pipe sealing cord is recommended for thread sealing (not included).

For complete specifications, see submittal [SUB76600](#).


Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
76600	Coupling for 2" SS Manifold	1		pair	\$ 221.24



Loctite 55 Stk# 76601

Loctite 55 pipe sealing cord recommended for sealing threads on 2" SS Manifold Couplings. 5,700 inches (145m) for 60 applications (2" pipe).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
76601	Loctite 55	1		ea.	\$ 108.39




Assembly Kits for 2" Stainless Steel Manifold Stk# 76800 Series

Assembly Kit includes:

- 2 Closed Ends for 2" SS Manifold with o-ring.
- 2 Open End Adapters (1-½" or 2" MNPT) for 2" SS Manifold with o-ring.
- 1 packet of lubricant.

For complete specifications, see submittal [SUB76800](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
76840	1-½" MNPT Assembly Kit for 2" SS Manifold	1		ea.	\$ 553.87
76850	2" MNPT Assembly Kit for 2" SS Manifold	1		ea.	\$ 531.96

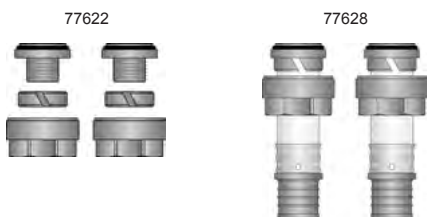

PEX Connecters for 2" Stainless Steel Manifold Stk# 77600 Series

Solid brass fitting attaches to the end of the PEX tubing and allows for easy installation onto the shut-off valves of the 2" SS manifold. Comes with o-ring.

1" connectors require 1" SS Press Sleeves (#24228; [page 12](#)) and use of a 1" Press Tool (e.g. 11328).

For complete specifications, see submittal [SUB77600](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
77619	5/8" PEX to 2" SS Manifold Connector	1		pair	\$ 74.01
77622	¾" PEX to 2" SS Manifold Connector	1	10	pair	\$ 77.42
77628	1" PEX to 2" SS Manifold Connector	1		pair	\$ 104.32

Special Order*



1" Cap and Washer for 2" Stainless Steel Manifold Stk# 76675

Cap to seal 2" SS manifold outlet.

For complete specifications, see submittal [SUB76675](#).


Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
76675	1" Cap and Washer for 2" SS Manifold	1		pair	\$ 53.67



Manifold Housings

Features & Benefits


- ✓ allows easy access to manifold
- ✓ visible parts made of satin coated steel and are ready to paint without priming
- ✓ cover enables a structural flush seal
- ✓ locking, removable (lift off) door
- ✓ stylish ventilation apertures to prevent build up of heat and formation of condensation
- ✓ openings for mains piping on left & right sides (recessed only)

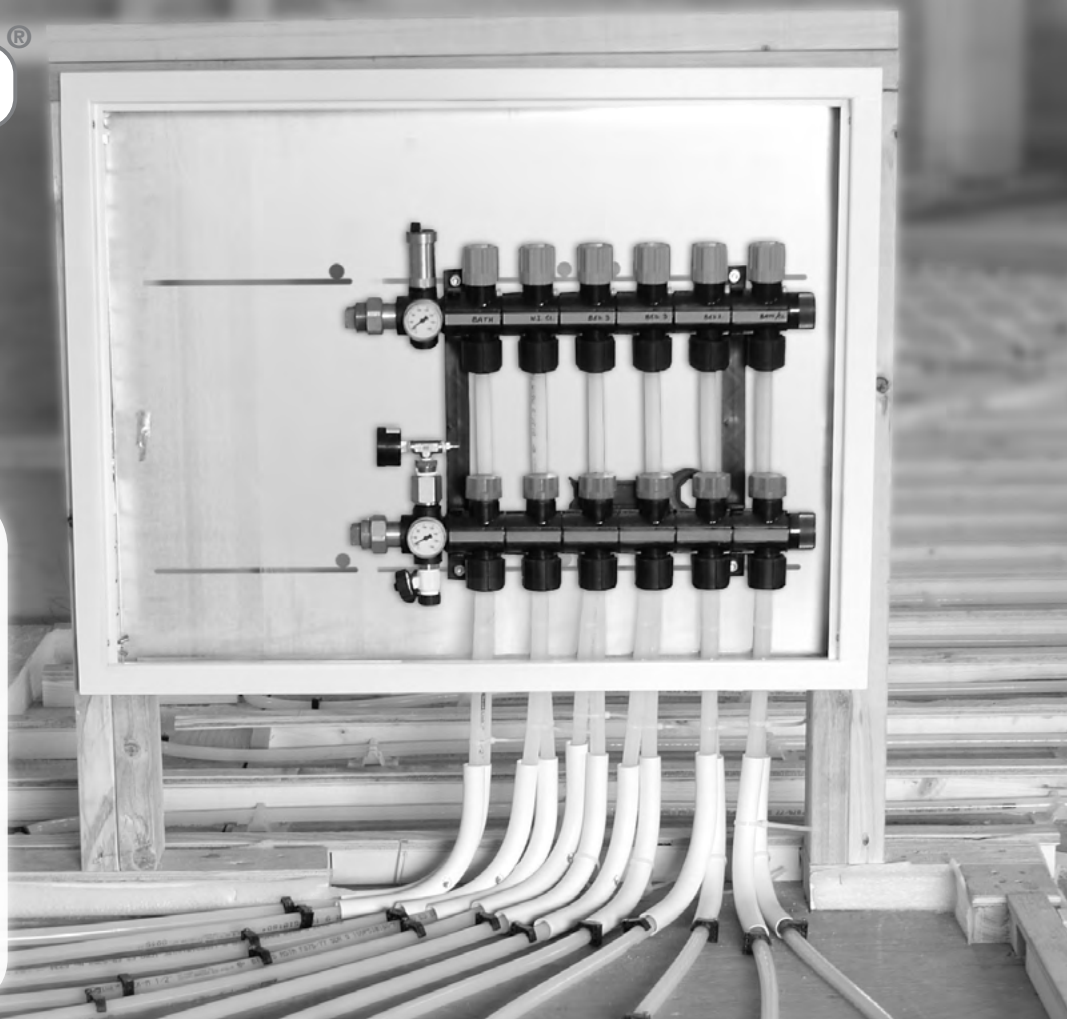


Stk. #	Width	Height	Depth	Max # of Loops with Manifold Assembly Kit #:				Max # of 1-¼" SS Manifold Loops		Max # of 2" SS Manifold Loops
				79400*		79200				
Surface Mount				①		①		①		①
72434	34-½" (876 mm)	28-½" (724 mm)	5-⅞" (149 mm)	8		8		9		7
72442	42-½" (1080 mm)	28-½" (724 mm)	5-⅞" (149 mm)	12		12		12		10
72446	46-½" (1180 mm)	28-½" (724 mm)	5-⅞" (149 mm)							12
72469	69" (1753 mm)	28-½" (724 mm)	5-⅞" (149 mm)							20
72481	85" (2160 mm)	28-½" (724 mm)	5-⅞" (149 mm)							24
72493	93" (2360 mm)	28-½" (724 mm)	5-⅞" (149 mm)							28
Recessed				① ②	③	① ②	③	① ②	③	
71724	24" (610 mm)	23" (584 mm)	3-⅞" (98 mm)	4	7	4	8	3	7	n/a
71730	30-¼" (768 mm)	23" (584 mm)	3-⅞" (98 mm)	6	9	7	10	6	7	n/a
71743	43-½" (1105 mm)	23" (584 mm)	3-⅞" (98 mm)	11	12	12	12	12	12	n/a

Installation Methods:

- ① Allowance for 90° mains piping.
- ② Allowance for straight isolation valves.
- ③ Manifolds only, no piping allowances.

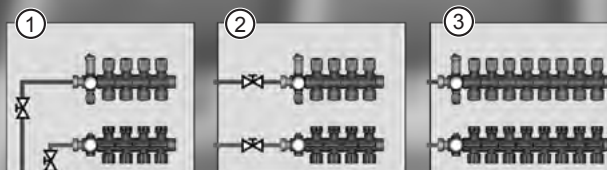

* Thermometers must be removed in recessed housing.



Manifold Housing: Recessed 71700 Series


Allows easy access to the manifold through its locking, removable door.

Satin coated steel is well suited for painting. Openings for mains piping on left and right sides. Depth allows for mounting a manifold in a 2x4 wall. Space is available for mounting a StatLink® module above the manifold.

71700 series housings are not compatible with 2" Stainless Steel Manifolds (76600 series).

For complete specifications, see submittal [SUB71700](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
71724	Recessed Manifold Housing 24"x23"x3-7/8"	1		ea.	\$ 624.82
71730	Recessed Manifold Housing 30"x23"x3-7/8"	1		ea.	\$ 690.10
71743	Recessed Manifold Housing 43-1/2"x23"x3-7/8"	1		ea.	\$ 804.32

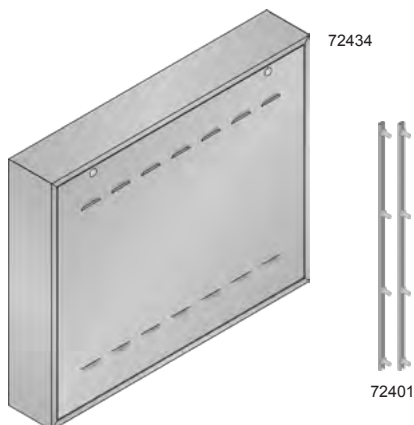

Manifold Housing: Surface Mount 72400 Series

Allows easy access to the manifold through its locking, removable door.

Features: made of satin coated steel, surfaces ready to paint without priming, and stylish ventilation apertures to prevent build up of heat and formation of condensation. Skirting by others.

72401 Manifold Mounting Rails adds flexible mounting for TwistSeal® and 1-1/4" Stainless Steel Manifolds.

72400 series housings are compatible with 2" Stainless Steel Manifolds (76600 series).

For complete specifications, see submittal [SUB72400](#).

	Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
	72434	Surface Mounted Manifold Housing 34-1/2"x28-1/2"x5-7/8"	1		ea.	\$ 846.74
	72442	Surface Mounted Manifold Housing 42-1/2"x28-1/2"x5-7/8"	1		ea.	\$ 996.65
	72446	Surface Mounted Manifold Housing 46-1/2"x28-1/2"x5-7/8"	1		ea.	\$ 1,118.07
Special Order*	72469	Surface Mounted Manifold Housing 69"x28-1/2"x5-7/8"	1		ea.	\$ 1,739.86
Special Order*	72481	Surface Mounted Manifold Housing 85"x28-1/2"x5-7/8"	1		ea.	\$ 2,050.52
Special Order*	72493	Surface Mounted Manifold Housing 93"x28-1/2"x5-7/8"	1		ea.	\$ 2,302.85
WSL	72401	Manifold Mounting Rails for Surface Mount Manifold Housings	1		ea.	\$ 63.02



Key Lock for Manifold Housing Door Stk# 71901

Key lock that can field replace the standard coin/screwdriver lock of manifold housings (72400 Series).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
71901	Key Lock for Manifold Housing Door	1		ea.	\$ 34.03



PEX Tubing Compression Couplings 69000 Series

Solid brass fittings couples PEX tubing to PEX tubing.

For complete specifications, see submittal [SUB69000](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
69005	1/2" x 1/2" PEX Comp. Coupling	1	25	ea.	\$ 46.22
69019	5/8" x 5/8" PEX Comp. Coupling	1	25	ea.	\$ 46.01
69022	3/4" x 3/4" PEX Comp. Coupling	1	25	ea.	\$ 65.39



PEX Compression to MNPT Adapters 68000 Series

Solid brass fittings adapts PEX tubing to male NPT thread.

Note: When used with PEX tubing there is a risk of thermal expansion / contraction due to temperature fluctuation. It is recommended that a swing joint or expansion loop is installed at the high temp (supply) end of the tubing.

For complete specifications, see submittal [SUB68000](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
68019	5/8" PEX Comp. x 3/4" MNPT Adapter	1	25	ea.	\$ 27.82



PEX Compression to Female Sweat Adapters 67100 Series

Solid brass fittings adapts PEX tubing to female copper pipe.

For complete specifications, see submittal [SUB67000S](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
67119	5/8" PEX Comp. x 3/4" F/Sweat Adapter	1	25	ea.	\$ 29.93




PEX Compression to Male Sweat Adapters 67000 Series

Solid brass fittings adapts PEX tubing to male copper pipe.

For complete specifications, see submittal [SUB67000S](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
67019	5/8" PEX Comp. x 3/4" M/Sweat Adapter	1	25	ea.	\$ 29.38

Note: For 1/2", 3/4", 1", 1-1/4", and 1-1/2" PEX, "Press System" or "Expansion System" fittings can be used, see the appropriate section.

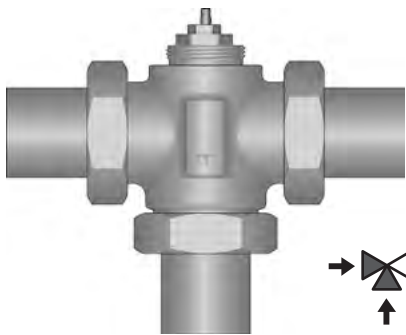

Compact 3-Way Mixing Valves 63700 Series

Three-way mixing valve for fluid temperature control in heating and cooling systems. Bronze valve body with brass nipples, protective cap, and stainless spindle with double O-ring seal. Threads are compatible with actuators (#56201, #56231, #56121; [page 66](#)) and thermostatic heads (#57091 and #57094; [page 61](#)).

½" Cv = 2.9 (Kv = 2.5)

¾" Cv = 4.1 (Kv = 3.5)

1" Cv = 5.3 (Kv = 4.6)

1-¼" Cv = 7.4 (Kv = 6.4)

For complete specifications, see submittal [SUB63700](#).

	Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
WSL	63716	½" Compact 3-Way Mixing Valve	1	5	ea.	\$ 293.35
WSL	63732	1-¼" Compact 3-Way Mixing Valve	1	5	ea.	\$ 895.40



Compact 3-Way Mixing Valves 63700V Series

Three-way mixing valve for fluid temperature control in heating and cooling systems, and can be used in diverting or mixing applications. Bronze valve body with brass nipples, protective cap, and stainless spindle with double O-ring seal. Threads are compatible with actuators (#56201, #56231, #56121; [page 66](#)) and thermostatic heads (#57091 and #57094; [page 61](#)).

¾" Cv = 5.1 (Kv = 4.4)

1" Cv = 6.6 (Kv = 5.7)

For complete specifications, see submittal [SUB63700V](#).

	Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
	63720V	¾" Compact 3-Way Mixing Valve	1		ea.	\$ 512.62
	63725V	1" Compact 3-Way Mixing Valve	1		ea.	\$ 656.47

Straight Zone / Injection / Radiator Valves 62000 Series



Provides on/off or modulated flow control for baseboard, fan coils, manifolds, injection controls, or miscellaneous supplemental heating units (e.g. towel warmers). #62216 and #62220 are nickel plated.

Threads are compatible with actuators (#56201, #56231, #56121; [page 66](#)), wireless actuator (#56401; [page 70](#)), and thermostatic heads (#57091 and #57094; [page 61](#)).

#62216 – ½" Cv = 2.3 (Kv = 2.0)

#62220 – ¾" Cv = 2.9 (Kv = 2.5)

For complete specifications, see submittal [SUB62000](#).

	Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
WSL	62216	Straight Zone Valve ½" NPT, Nickel Plated	1	20	ea.	\$ 88.95
WSL	62220	Straight Zone Valve ¾" NPT, Nickel Plated	1	20	ea.	\$ 114.37

Straight Zone / Injection / Radiator Valves 62000V Series



Provides on/off or modulated flow control for baseboard, fan coils, manifolds, injection controls, or miscellaneous supplemental heating units (e.g. towel warmers).

Threads are compatible with actuators (#56201, #56231, #56121; [page 66](#)), wireless actuator (#56401; [page 70](#)), and thermostatic heads (#57091 and #57094; [page 61](#)).

#62016V – ½" Cv = 2.1 (Kv = 1.8)

#62020V – ¾" Cv = 3.2 (Kv = 2.8)

#62025V – 1" Cv = 4.1 (Kv = 3.5)

#62030V – 1-¼" Cv = 4.8 (Kv = 4.2)

For complete specifications, see submittal [SUB62000V](#).

	Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
	62016V	Straight Zone Valve ½" NPT	1		ea.	\$ 113.14
	62020V	Straight Zone Valve ¾" NPT	1		ea.	\$ 145.89
	62025V	Straight Zone Valve 1" NPT	1		ea.	\$ 182.91
	62030V	Straight Zone Valve 1-¼" NPT	1		ea.	\$ 335.64



Thermostatic Head Stk# 57091

Thermostatic head for HeatLink® zone valves. Maximum setting 84°F (29°C). Senses 0.4°F (0.2°C) air temperature change. Takes 24 minutes to close from full open.

For complete specifications, see submittal [SUB57091](#).

WSL	Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
	57091	Thermostatic Head (16°-28°C)	1		ea.	\$ 88.63





Thermostatic Head c/w Capillary Stk# 57094

Thermostatic actuator with remote copper sensor used as a setpoint (injection) control for HeatLink® zone/injection valves. Operation is based on a sensitive element seated under the housing and connected to the remote sensor via a liquid-filled capillary. The setpoint is set by rotating the adjustment knob. The actuator adjusts the flow through the valve on which it is mounted, based on the difference between the sensor temperature and setpoint.

Temperature adjustment range: 68-158°F (20-70°C). The temperature adjustment range can be limited using stop clips.

For complete specifications, see submittal [SUB57094](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
57094	Thermostatic Head c/w Capillary (68°F-158°F)	1	5	ea.	\$ 369.96




4-Way FNPT Mixing Valves 64000 Series

This unit mixes high temperature boiler water with heating return water to create a supply water temperature. It has the option of manual operation, or it can be fitted with a Mixing Valve Motor for 1" to 2" FNPT Valves 3-Point Floating (#58131) or Mixing Valve Motor for 1" to 2" FNPT Valves DDC (#58132) for fully automatic operation.

1" Cv = 11.7 (Kvs = 10)
1-¼" Cv = 18.7 (Kvs = 16)
1-½" Cv = 29.3 (Kvs = 25)
2" Cv = 46.8 (Kvs = 40)

For complete specifications, see submittal [SUB64001](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
64026	1" × 4-Way FNPT Mixing Valve	1		ea.	\$ 538.85
64031	1-¼" × 4-Way FNPT Mixing Valve	1		ea.	\$ 541.72
64041	1-½" × 4-Way FNPT Mixing Valve	1		ea.	\$ 866.93
64051	2" × 4-Way FNPT Mixing Valve	1		ea.	\$ 1,087.27



3-Way FNPT Mixing / Diverting Valves 63500 Series

This unit mixes high temperature boiler water with heating return water to create a supply water temperature. It has the option of manual operation, or it can be fitted with a Mixing Valve Motor for 1" to 2" FNPT Valves 3-Point Floating (#58131) or Mixing Valve Motor for 1" to 2" FNPT Valves DDC (#58132) for fully automatic operation.

1" Cv = 11.7 (Kvs = 10)
1-¼" Cv = 18.7 (Kvs = 16)
1-½" Cv = 29.3 (Kvs = 25)
2" Cv = 46.8 (Kvs = 40)

For complete specifications, see submittal [SUB63501](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
63026	1" × 3-Way FNPT Mixing / Diverting Valve	1		ea.	\$ 501.94
63539	1-¼" × 3-Way FNPT Mixing / Diverting Valve	1		ea.	\$ 572.73
63541	1-½" × 3-Way FNPT Mixing / Diverting Valve	1		ea.	\$ 841.32
63551	2" × 3-Way FNPT Mixing / Diverting Valve	1		ea.	\$ 1,003.13



Mixing Valve Motors for 1" to 2" Rotary NPT Valves Stk# 58131 & 58132


Used to automatically operate the 4-way or 3-way mixing valve. For use with 4-way FNPT mixing valves (#64026, #64031, #64041, #64051) and 3-way FNPT mixing / diverting valves (#63026, #63539, #63541, #63551).

#58131 motor is floating 3-point action mixing valve motor.
24 Vac 50/60 Hz 2 VA

#58132 motor is DDC mixing valve motor.
24 Vac/dc 50/60 Hz 4 VA

For complete specifications, see submittal [SUB58131](#) or [SUB58132](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
58131	Mixing Valve Motor for 1" to 2" FNPT Valves 3-Point Floating	1		ea.	\$ 838.69
58132	Mixing Valve Motor for 1" to 2" FNPT Valves DDC	1		ea.	\$ 1,140.42



4-Way Flange Mixing Valves 64100 Series

This unit mixes high temperature boiler water with heating return water to create a supply water temperature. It has the option of manual operation, or it can be fitted with a Mixing Valve Motor for 2" to 4" Flange Valves 3-Point Floating (#58200) or Mixing Valve Motor for 2" to 4" Flange Valves DDC (#58300) for fully automatic operation. Flanges are DIN compatible.

2" Cv = 69.4 (Kvs = 60)

2-½" Cv = 104.0 (Kvs = 90)

3" Cv = 173.4 (Kvs = 150)

4" Cv = 260.1 (Kvs = 225)

For complete specifications, see submittal [SUB64101](#).

	Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
WSL	64164	2" × 4-Way Flange Mixing Valve	1		ea.	\$ 1,854.90
	64166	2-½" × 4-Way Flange Mixing Valve	1		ea.	\$ 2,275.56
	65000	4" × 4-Way Flange Mixing Valve	1		ea.	\$ 4,147.75



DIN Flanges and Gaskets for 4-Way Flange Mixing Valves 64100F & 64100G Series

Four flanges and four gaskets are required for each 4-way flange mixing valve.

For complete specifications, see submittal [SUB64100F](#).

	Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
WSL	64164F	2" DIN Flange	1		ea.	\$ 88.60
	64166F	2-½" DIN Flange	1		ea.	\$ 108.46
	64181F	3" DIN Flange	1		ea.	\$ 175.53
WSL	65000F	4" DIN Flange	1		ea.	\$ 204.40
	64164G	2" Gasket for DIN Flange	1		ea.	\$ 27.68
	64166G	2-½" Gasket for DIN Flange	1		ea.	\$ 48.42
WSL	64181G	3" Gasket for DIN Flange	1		ea.	\$ 58.92
	65000G	4" Gasket for DIN Flange	1		ea.	\$ 76.47


**Mixing Valve Motors for 2" to 4" Flange Mixing Valves
Stk# 58200 & 58300**


Used to automatically operate the 4-way flange mixing valve. For use with flanged 2" to 4" mixing valves (#64164, #64166, #64181, #65000).

#58200 motor is floating 3-point action mixing valve motor.
24 Vac 50/60 Hz 2 VA

#58300 motor is DDC mixing valve motor.
24 Vac/dc 50/60 Hz 5 VA

For complete specifications, see submittal [SUB58200](#) or [SUB58300](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
58200	Mixing Valve Motor for 2" to 4" Flange Mixing Valves 3-Point Floating	1		ea.	\$ 1,447.17
58300	Mixing Valve Motor for 2" to 4" Flange Mixing Valves DDC	1		ea.	\$ 2,584.39



Straight Balancing Valve 1" Female Sweat

Stk# 62325

Flow balancing valve for use in injection systems and with the side stream filter.

For complete specifications, see submittal [SUB62325](#).

WSL

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
62325	Straight Balancing Valve 1" F/Sweat	1	24	ea.	\$ 196.84



Pressure Activated Bypass Valves

60000V Series

This valve prevents a steep rise of the pump head and maintains flow at a stable rate. Also ensures only required amount of circulating water is used for hydronic systems. The valves can be adjusted to any point between 2 and 17 ft H₂O (50 and 500 mbar).

Flow ranges:

- ¾" = 0 - 8.7 US gpm (0 - 1976 L/h)
- 1" = 0 - 13.5 US gpm (0 - 3066 L/h)
- 1-¼" = 13.5 - 26.9 US gpm (3066 - 6110 L/h)

For complete specifications, see submittal [SUB60000V](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
60020V	Pressure Activated Bypass Valve ¾"	1		ea.	\$ 246.80
60025V	Pressure Activated Bypass Valve 1"	1		ea.	\$ 321.44
60040V	Pressure Activated Bypass Valve 1-¼"	1		ea.	\$ 424.79



Actuators c/w End Switch 56230 Series

These motors allow for additional room temperature control in conjunction with a room thermostat by mounting on a TwistSeal[®] supply manifold module (56230), Stainless Steel Manifold (56231), HeatLink[®] 62000V & 63700V series zone valves (56231), or TwistSeal[®] Multiport Manifold (56232). Comes complete with end switch to allow pump and/or boiler switching.

For complete specifications, see submittal [SUB56230](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
56230	HeatLink [®] TwistSeal [®] Manifold Actuator c/w End Switch	1	100	ea.	\$ 189.83
56231	HeatLink [®] Valve & SS Manifold Actuator c/w End Switch	1	100	ea.	\$ 170.19
56232	HeatLink [®] Multiport Manifold Actuator c/w End Switch	1	100	ea.	\$ 193.11



Actuators 56200 Series

These actuators allow for additional room temperature control in conjunction with a room thermostat by mounting on a TwistSeal[®] supply manifold module (56200), Stainless Steel Manifold (56201), HeatLink[®] 62000V & 63700V series zone valves (56201), or TwistSeal[®] Multiport Manifold (56202). Includes a heat demand LED indicator.

For complete specifications, see submittal [SUB56200](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
56200	HeatLink [®] TwistSeal [®] Manifold Actuator with LED	1	100	ea.	\$ 124.93
56201	HeatLink [®] Valve & SS Manifold Actuator with LED	1	100	ea.	\$ 109.32
56202	HeatLink [®] Multiport Manifold Actuator with LED	1	100	ea.	\$ 120.96


How to tell the 562x0 and 562x1 actuators apart

Actuator	LED	End Switch	Female Thread	Center Pin	Mounts on
56200	Yes	No	Fine	Yes	TwistSeal [®] 78200 & 78400
56201	Yes	No	Coarse	No	Valves & SS manifolds
56230	No	Yes	Fine	Yes	TwistSeal [®] 78200 & 78400
56231	No	Yes	Coarse	No	Valves & SS manifolds



56200 / 56230

56201 / 56231



DDC Actuator Stk# 56121

These actuators allow for additional room temperature control when used in conjunction with a direct digital control system by mounting on a Stainless Steel Manifold, or HeatLink[®] 62000V & 63700V series zone valves.

For complete specifications, see submittal [SUB56121](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
56121	HeatLink [®] DDC Actuator for Manifolds and Valves	1	100	ea.	\$ 286.12

HeatLink® SMART SYSTEM

Products in the HeatLink® Smart System line include thermostats, modules, actuators and relays to wirelessly control a heating system. The addition of smart plugs and sensors expand the system into day to day life. It all begins with the heart of the system, the Wireless Internet Gateway. The Gateway coordinates the ZigBee HA wireless protocol that the Smart System devices use to interact, and connects to the building's Internet router to create a secure path to the HeatLink® Smart System app. Then the user can quickly add and operate any of the products from the HeatLink® Smart System line.


Features & Benefits:

- Wireless communication. Save the time and cost of running wires.
- Control your system from anywhere. User friendly Web, Android and iOS apps available.
- The app includes customizable schedules and rules.
- System devices can be added, deleted, or configured quickly and easily using the app.
- Compatibility with other third party devices and Amazon Alexa.
- The system can be setup without internet access (offline). When internet access is available the system can then be app enabled (online).



HeatLink® Smart System app

Radiant floor heating with manifold


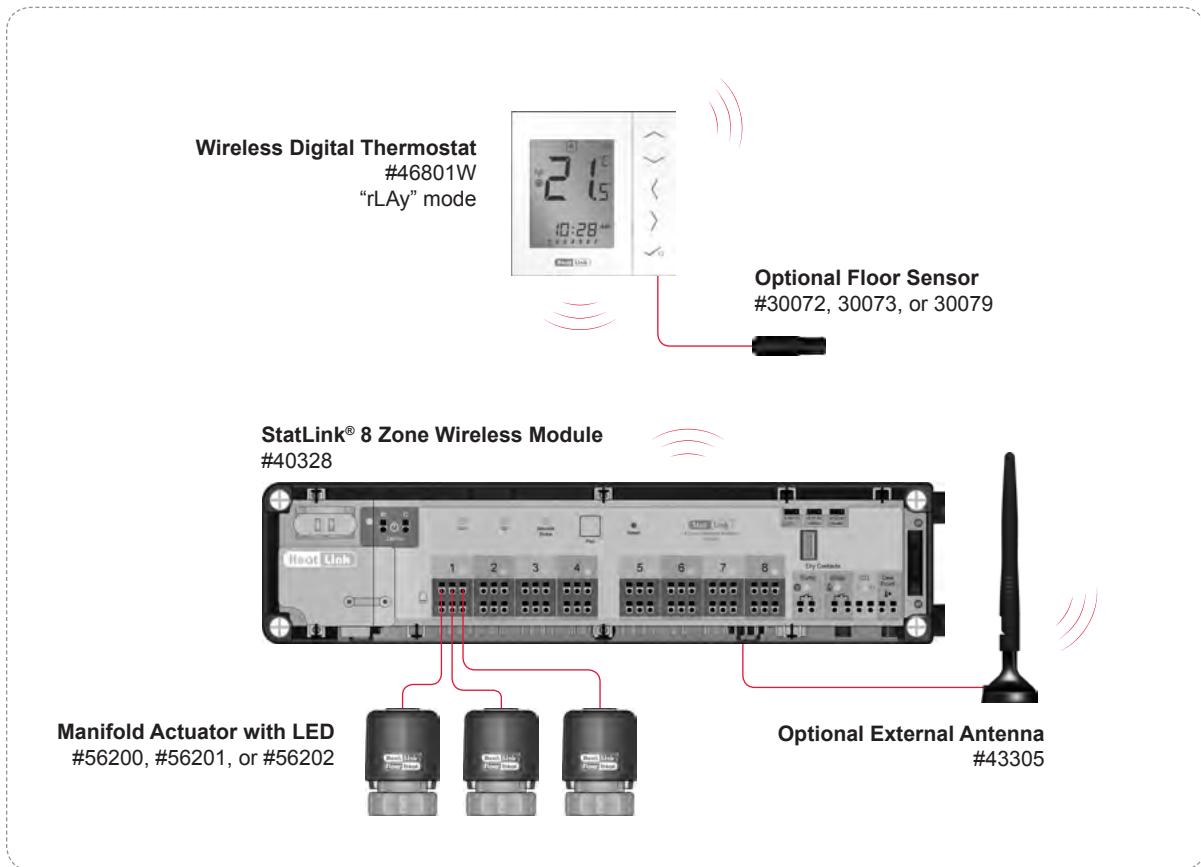


Product Compatibility

Item	Stk#	Co-ordinator #43306	Gateway - Offline #43301	Gateway - Online #43301
HeatLink® Smart System App				•
HeatLink® Wireless Digital Thermostat	46801W	•	•	•
StatLink® 8 Zone Wireless Module	40328	•	•	•
Wireless Valve Actuator	56401	•	•	•
Wireless Relay	43302	•	•	•
Wireless Smart Plug / Repeater	43304			•
Door/Window Sensor	43303			•
Repeater	43307	•	•	•
Water Leak Sensor	43310			•
Inline Shutoff Valve	43311			•

**Wireless Internet Gateway
#43301**

The heart of a HeatLink Smart System.

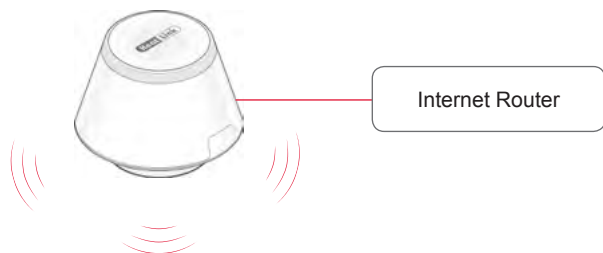


**Door/Window Sensor
#43303**

Detects when doors and windows have been opened or closed.

Trigger other devices to react using smart rules or have notifications sent to you.

E.g. turn a lamp on when a door opens, or turn down a thermostat if a window is left open.



**Wireless Smart Plug / Repeater
#43304**

Create schedules or rules to automatically turn devices on or off.

Monitor energy consumption.

E.g. towel warmer, hair iron, lamp, space heater, air conditioner, or slow cooker.

**Radiant floor heating with zone valve or
baseboard / radiator heating**



**Wireless Digital Thermostat
#46801W
"rAd" mode**



**Wireless Valve Actuator
#56401
up to 6 per thermostat**

Heating for an individual zone



**Wireless Digital Thermostat
#46801W
"rEC2" mode**



**Wireless Relay
#43302
"RX2" mode**

Motorized Valve,
Thermal Actuator, Fan
Coil, or Pump



**Wireless Relay
#43302
"RX1" mode**

Heat Source

Pump



Wireless Internet Gateway Stk# 43301

The Wireless Internet Gateway is the heart of a HeatLink Smart System.

The Gateway coordinates the ZigBee HA wireless protocol that the Smart System devices use to interact, and connects to the building's Internet router to create a secure path to the HeatLink app.

Unlike some connected home systems, the Gateway is the only device that needs to be connected to the Internet, so it is quick to setup and simple to manage and grow the Smart System with more devices as required.

You can connect up to 200 devices to one gateway.

Includes USB power adapter, USB power cable, and ethernet cable.

120 Vac 60 Hz NEMA 1 (Type A) plug.

For complete specifications, see submittal [SUB43301](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
43301	Wireless Internet Gateway	1	16	ea.	\$ 429.11



HeatLink® Wireless Digital Thermostat Stk# 46801W

The HeatLink Wireless Digital Thermostat delivers an easy to install solution for heating control when connected to a StatLink® wireless module, wireless valve actuator, or wireless relay. Place anywhere capability, not just where the wires can reach.

Features:

- Clear and intuitive LCD display.
- Stylish contemporary design.
- Full local control.
- Wireless installation using ZigBee protocol.
- Pulse width modulation.
- Fully programmable with both temperature and scheduling control.
- Pre-programmed pre-set modes including vacation, party, frost, and manual override.
- Battery operated for quick and trouble-free wireless installation.
- Valve protection function exercises the valve(s) one a week.
- Optional 10K external sensor.

Includes 4× AAA alkaline batteries and mounting screws.

For complete specifications, see submittal [SUB46801](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
46801W	HeatLink® Wireless Digital Thermostat	1	40	ea.	\$ 214.99

StatLink® 8 Zone Wireless Module Stk# 40328

The StatLink Wireless Module for eight-zone radiant floor heating with wireless communication. Zones are controlled by Wireless Digital Thermostats.



Features:

- Can be used with NO or NC thermal actuators.
- Terminals for three actuators per zone.
- Pump dry contact 3 min on/off delay.
- Boiler dry contact 3 min on delay and 0 or 15 min off delay.
- Contacts for heating/cooling changeover, and humidity sensor.
- Plug-in connections.
- LED status indication.
- Strain relief fittings.
- USB plug to provide power to a Co-ordinator
- Optional external antenna.

Includes 13 ¾" (35 cm) DIN rail and mounting screws.

24 Vac 60 Hz

For complete specifications, see submittal [SUB40328](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
40328	StatLink® 8 Zone Wireless Module	1	16	ea.	\$ 618.07

Wireless Valve Actuator Stk# 56401

The Wireless Valve Actuator replaces the traditional wax element TRV actuator with a smart electrical device to open and close a zone or radiator valve.

A Wireless Digital Thermostat controls the operation and is remote from the radiator so it monitors the actual ambient room temperature to ensure optimum heating accuracy.

A single thermostat can control up to six actuators in the same zone to maintain the desired room temperature and increase energy efficiency.

Features & benefits:

- Temperature is monitored by the room thermostat, not the valve, for optimum accuracy, efficiency and comfort.
- Modulates independently to find correct temperature and maintain efficiency using one of three control modes: On/Off, Auto, or Learning.
- Fits most standard zone or radiator valves with supplied adapter.
- Fail safe mode (uses its internal sensor and fixed setpoint of 15°C to control the temperature when signal is lost, or opens 25% when battery is low).
- Frost protection (if the valve has been manually closed, the thermostat will automatically maintain the frost protection setpoint)
- Valve protection (will exercise a few seconds after 14 days of inactivity).
- Manual override function.

Includes 2× AA alkaline batteries and RA valve adapter.


Compatible with 620xxV and 622xx series zone/radiator valves.

Not compatible with TwistSeal or stainless steel manifolds.

For complete specifications, see submittal [SUB56401](#).



Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
56401	Wireless Valve Actuator	1	40	ea.	\$ 266.00

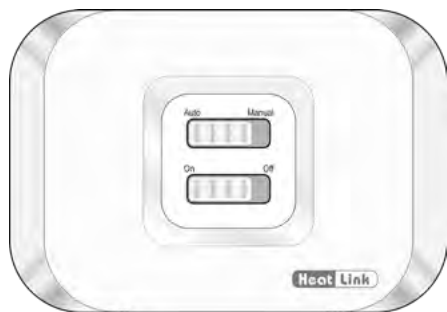

Wireless Relay Stk# 43302

The Wireless Relay receives wireless signals to switch on or off a 24 Vac contact. It has an internal switch to select one of two modes:

RX1 mode - The unit is wired to a boiler or heat source to switch it on or off using the signals it receives from Wireless Modules, Wireless Digital Thermostats used with Wireless Valve Actuators, as well as a Wireless Relay in RX2 mode.

RX2 mode - Switching of the unit will be controlled by a paired Wireless Digital Thermostat to activate a pump or zone valve.

Only one unit in RX1 mode and one unit in RX2 mode can be used as part of a system.

Features & benefits:


- Manual override function.
- NO contact output, max 24 Vac, 16(5)A

24 Vac 60 Hz.

Includes mounting screws.

For complete specifications, see submittal [SUB43302](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
43302	Wireless Relay	1	20	ea.	\$ 209.41



Wireless Smart Plug / Repeater Stk# 43304

The Wireless Smart Plug / Repeater is small, yet powerful enough to provide simple on/off power control of devices using up to 15 A.

Its small size not only keeps the other outlet of a standard duplex receptacle clear, it also allows the use of a second Smart Plug.

Works with the Smart System App to allow smartphones, tablets, or PCs to turn on and off devices from anywhere. Create schedules or OneTouch™ rules to automatically turn devices on or off.


Features:

- Energy consumption measurement.
- Up to 15 Amp resistive load switching.
- Protocol repeater to extend the wireless network.

For complete specifications, see submittal [SUB43304](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
43304	Wireless Smart Plug / Repeater	1	48	ea.	\$ 181.07

Door/Window Sensor Stk# 43303



The Door / Window Sensor is a simple device that connects wirelessly with the Gateway as part of the Smart System.

The sensor sits across both sides of the opening of a door or window and when the contact is closed or opened, a signal is sent wirelessly to the Gateway. User programmed rules easily created in the Smart System app then define what should be done in response and the Gateway wirelessly controls the appropriate device.

By detecting when doors and windows have been opened or closed, smart rules can be triggered to control other devices to save energy, improve efficiency, or convenience.

Features & benefits:

- Monitor door/window access from anywhere using a Smartphone, Tablet, or PC via the app.
- Optimize heating/cooling efficiency by controlling your thermostats to react when doors or windows are opened.
- Program your system to remind you if doors or windows are left open when you leave the home.
- Anti-tamper switch will notify you of tampering.

Includes 1× CR3032 3V Lithium battery and mounting kit.

For complete specifications, see submittal [SUB43303](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
43303	Door/Window Sensor	1	60	ea.	\$ 140.71



External Antenna Stk# 43305

The External Antenna improves the performance of the StatLink® 8 Zone Wireless Module to either overcome radio shadows or extend the range.

Features & benefits:

- Minimize cost of additional repeaters and shorten installation time
- Quick and easy to install
- Magnetic mount.

Cable length: 39" (1 m)

For complete specifications, see submittal [SUB43305](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
43305	External Antenna	1	100	ea.	\$ 89.27



Water Leak Sensor Stk# 43310

The Water Leak Sensor detects the presence of water on a surface or across remote leads. This sensor may be used on horizontal surfaces with low overhead clearance, narrow vertical spaces with the wall mounting bracket (shown), or in difficult locations using the remote leads (not shown). The Water Leak Sensor connects wirelessly with a Gateway.

Features and benefits:

- When used in conjunction with a Inline Shutoff Valve, costly water damage can be avoided by shutting off the water supply.
- Automated leak detection.
- Monitoring from anywhere using a Smartphone, Tablet, or PC via the app.
- Easy to install.
- Waterproof.
- Battery Operated.

Includes 1× CR2 3V Lithium battery, wall mounting bracket, mounting kit, and 78" (2 m) remote leads.

For complete specifications, see submittal [SUB43310](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
43310	Water Leak Sensor	1		ea.	\$ 125.87



Inline Shutoff Valve Stk# 43311

The Inline Shutoff Valve controls water supply as part of a HeatLink Smart System. This inline valve can communicate with one or more Water Leak Sensors to automatically shut off the water supply in the event of a water leak. The Inline Shutoff Valve connects wirelessly with a Gateway.


Features and benefits:

- When used in conjunction with one or more Water Leak Sensors, costly water damage can be avoided by shutting off the water supply.
- Automated water flow control.
- Monitoring from anywhere using a Smartphone, Tablet, or PC via the app.
- No Lead Brass valve.
- ¾" NPT female pipe connections.
- LED status indicator.
- 120 Vac – 60 Hz.
- Local manual override.

Includes AC adapter and cable clips.

For complete specifications, see submittal [SUB43311](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
43311	Inline Shutoff Valve	1		ea.	\$ 506.58

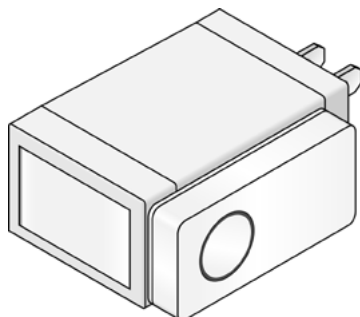

Co-ordinator Stk# 43306

The Co-ordinator is a simple USB powered device that coordinates Smart System devices across the Zigbee network.

It's a cost effective alternative to a Wireless Internet Gateway for systems *where remote monitoring and control are not required.*

The Co-ordinator can handle up to 30 Wireless Thermostats to coordinate up to 90 Wireless Valve Actuators or up to nine (9) StatLink® 8 Zone Wireless Modules.


When more than 32 battery powered devices are used, #43307 Repeaters may be required depending on which Smart System AC powered devices are on the network (#40328 or #43302). Each AC powered device increases the system capacity for battery operated devices by 32.

Includes USB AC adapter.

Note: Not compatible with the HeatLink Smart System app.

For complete specifications, see submittal [SUB43306](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
43306	Co-ordinator	1	60	ea.	\$ 157.88

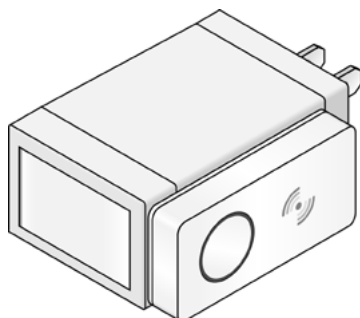

Repeater Stk# 43307

The Repeater can be used to boost the signal or extend the network when required, for example, areas with numerous concrete obstructions or for extended distances between devices.

When more than 32 battery powered devices are used, additional Repeaters may be required depending on which Smart System AC powered devices are on the network.

Features & Benefits

- Extends the range of network in areas with obstructions or between extended distances.
- Increases the capacity of battery powered devices on the ZigBee network by 32.

Includes USB AC adapter.

For complete specifications, see submittal [SUB43307](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
43307	Repeater	1	60	ea.	\$ 192.51



Plug-in Transformers PLINTR Series

24 Vac plug-in transformers for use with panels or low voltage electronics.

For complete specifications, see submittal [SUBPLINTR](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
PLINTR40VA	24Vac 40VA Plug-In Transformer for Panels	1		ea.	\$ 227.30




HeatLink® Wired Digital Timer Thermostat Stk# 46645

This HeatLink Wired Digital Timer Thermostat is a stylish and accurate 24V digital display room thermostat. This attractive, modern thermostat has been specifically designed to be used for radiant floor heating applications. With silent switching, Triac technology, pulse width modulation (PWM), a large, easy to read digital display, and fully programmable for time and heat schedules. Optional 10K external sensor.

For complete specifications, see submittal [SUB46645](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
46645	HeatLink® Wired Digital Timer Thermostat	1	40	ea.	\$ 152.91



24Vac DPDT Pump Relay Box Stk# 45112

Electrical enclosure complete with #45012 relay, #45032 socket, and DIN rail.

Contacts:

- 10A resistive, 7.5A inductive @ 110 Vac, ¼ hp.
- 7.5A resistive, 5.0A inductive @ 220 Vac, ½ hp.

For complete specifications, see submittal [SUB45112](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
45112	HeatLink® 24Vac DPDT Pump Relay Box	1		ea.	\$ 280.84

Pump Wiring Center 41310 Series



The Pump Wiring Centers allow wired thermostats to control pumps and boilers for hydronic systems while supporting the following functions and features:

- Primary pump control.
- Priority zone support (domestic hot water).
- Purge – Priority pump continues to run for 2 minutes after end of priority call.
- Exercise – pumps turn ON for 30 sec. after 72 hours of inactivity.
- Thermostat grouping.
- ZC/ZR boiler enable support.
- XX and AUX normally open contacts support.
- Master / Slave function for up to 5 units (1 master / 4 slaves).
- LED indicators for zones and Priority status.

For complete specifications, see submittal [SUB41310](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
41316	6 Zone Pump Wiring Center	1	4	ea.	\$ 529.17

StatLink® 8 Zone Wired Module Stk# 40318

The StatLink® 8 Zone Wired Module is complete with all the main electrical connections for a hydronic floor heating system. This module can be mounted either on a DIN rail or directly to a wall. It connects room thermostats to their corresponding actuators.

Features:

- Can be used with NO or NC thermal actuators.
- Terminals for four actuators per zone.
- Pump dry contact 3 min on/off delay.
- Boiler dry contact 3 min on delay and 0 or 15 min off delay.
- Plug-in connections.
- LED status indication.
- Strain relief fittings.

The 8 zone wired module has a current rating of 2A; a 60VA transformer allows for 20 actuators per module to be connected with up to 4 actuators per zone.

Includes 13 ¾" (35 cm) DIN rail and mounting screws.

For complete specifications, see submittal [SUB40318](#).



Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
40318	StatLink® 8 Zone Wired Module	1	16	ea.	\$ 270.11

Installation Track for StatLink® Modules Stk# 44325

Allows for easy and fast installation of all control modules.

Length = 25"

For complete specifications, see submittal [SUB44325](#).



Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
44325	StatLink® Installation Track, 25"	1		ea.	\$ 20.52



HeatLink® Compact Mixing Reset Control Stk# 31355

The 31355 Compact Mixing Reset Control regulates the supply water temperature of an automated mixing valve in order to provide outdoor reset or setpoint operation. The 31355 provides a floating action (3-way or 4-way mixing) or a 0/2–10 Vdc (2-way injection) signal to adjust the mixing valve position. The 31355 also includes two separate night setback channels.

Outdoor sensor and 1 universal sensor are included.

24Vac 50/60 Hz 50 VA (max)

For complete specifications, see submittal [SUB31355](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
31355	HeatLink® Compact Mixing Reset Control	1		ea.	\$ 1,156.89



Snow Melt Control 680-BMS BACnet Stk# 31680


The 31680 Snow Melt Control is designed to control a single zone snow melting system. Up to two Snow/Ice Sensors (#30090) can be connected, allowing for a larger detection area and redundancy. The control automatically adjusts the mixed supply water to the snow melting system by controlling a variable speed injection pump or mixing valve. The 31680 control includes a large Liquid Crystal Display (LCD) in order to view system status and operating information.

Outdoor sensor and 3 universal sensors are included.

115 Vac 60 Hz 320 VA (max)

For complete specifications, see submittal [SUB31680](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
31680	Snow Melt Control 680-BMS BACnet (30090,30091,Snow/Ice Sensor sold sep)	1		ea.	\$ 7,771.86

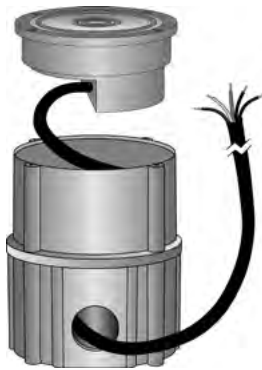

Snow/Ice Detector (Sensor)

Stk# 30090, 30091

This snow/ice sensor in conjunction with the 31680, activates and controls a snow melting system based on moisture (snow/ice) and slab temperature. This control is not designed as a simple detection device and will not operate properly in an unheated slab.

For complete specifications, see submittal [SUB30090](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
30090	Snow/Ice Sensor (10K) 65 ft cable	1		ea.	\$ 2,139.17
30091	Snow/Ice Sensor Socket	1		ea.	\$ 486.17



Universal Sensor

Stk# 30071

Standard sensor for use as optional sensor in 30000 series controls.

For complete specifications, see submittal [SUB30072](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
30071	Universal Sensor (10K)	1		ea.	\$ 91.13



Slab Sensor - PVC Sleeve

Stk# 30072, 30073

Sensors for use in measuring slab or ground temperatures. The 30072 and 30073 standard sensors with PVC sleeve are designed for use in soil or concrete. For use with 30000 series controls and 46000 series thermostats.

For complete specifications, see submittal [SUB30072](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
30072	Slab Sensor (10K) PVC Sleeve 20ft Cable	1		ea.	\$ 308.78
30073	Slab Sensor (10K) PVC Sleeve 40ft Cable	1		ea.	\$ 526.99



Slab Sensor - Stainless Steel Sleeve

Stk# 30079

Sensors for use in measuring slab or ground temperatures. The 30079 sensor with stainless steel sleeve is designed for use in concrete, thin-set and grout. For use with 30000 series controls and 46000 series thermostats.

For complete specifications, see submittal [SUB30072](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
30079	Slab Sensor (10K) SS Sleeve 10ft Cable	1		ea.	\$ 110.88



HeatLink® Snow Melt Control Package - DDC Stk# SMCP


The ETO2SMCNTR Snow Melt Control is designed to control a one or two zone snow melting system. The snow melting system may be started manually or automatically through the use of a Driveway Sensor (#DRVWSNS-SS). The control automatically adjusts the mixed supply water to the snow melting system by controlling a DDC Mixing Valve Motor (#58132 or #58300; sold separately). The control includes a Liquid Crystal Display (LCD) in order to view system status and operating information.

Includes two 12K NTC sensors (ETF1899ASNS).
Driveway Sensor sold separately.

120 Vac 50/60 Hz
24 Vac 50/60 Hz (for mixing valve)

For complete specifications, see submittal [SUBSMCP](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
SMCP	Snowmelt Control c/w ETO2 DDC and 2 Strap On Sensors	1		ea.	\$ 2,516.51

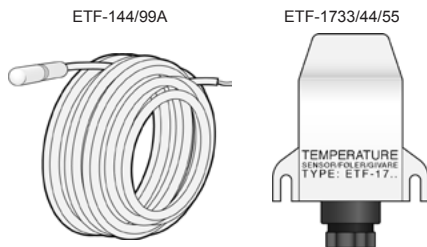

Sensor NTC 12K ETF Series

Optional NTC 12K sensors for use with the ETO2SMCNTR snow melt control, SMCP, or standard Snow Melt Panels.

For complete specifications, see submittal [SUBETF14499A](#) or [SUBETF17334455](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
ETF-144/99A	Slab Sensor (12k) PVC Sleeve 8ft Cable for ETO2SMCNTR SnowmeltController	1		ea.	\$ 192.01
ETF-1733/44/55	Optional Outdoor Sensor for SMCP & SMP Panels	1		ea.	\$ 396.75




Snow/Ice Detector (Sensor) Stk# DRVWSNS-SS

This snow/ice sensor in conjunction with the ETO2SMCNTR snow melt control, SMCP, or standard Snow Melt Panels, activates and controls a snow melting system based on moisture (snow/ice) and slab temperature.

For complete specifications, see submittal [SUBDRVWSNSSS](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
DRVWSNS-SS	Driveway Sensor for SMP Panels	1		ea.	\$ 2,161.33



Track Staples

Stk# 89010

Staples are used to fasten tubing tracking to polystyrene insulation. The hooks on the ends ensure the staple will not loosen prior to topping pour.

For complete specifications, see submittal [SUB89000](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
89010	500 Track Staples	1	20	bag	\$ 207.76





Staples for Stand-up Stapler (old style)

89240 Series

Staples for fastening up to ½" (or 18mm O.D.) PEX tubing to polystyrene insulation. For use with Stand-up Stapler #10220 (discontinued).

For complete specifications, see submittal [SUB89240](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
89244	300× 2-¾" (60mm) Staples for Stand-up Stapler	1	20	box	\$ 77.66



Staples for Deluxe Staple Gun

89250 Series

Staples for fastening up to ⅝" (or 20mm O.D.) PEX tubing to polystyrene insulation. For use with HeatLink® Deluxe Staple Gun #10230 ([page 131](#)).

For complete specifications, see submittal [SUB89250](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
89251	300× 1-½" Staples for HeatLink® Deluxe Staple Gun	1	20	box	\$ 100.57
89252	300× 2" Staples for HeatLink® Deluxe Staple Gun	1	10	box	\$ 124.13



HeatLink® Tie Straps

89100 Series

Used to fasten piping to wire mesh or rebar. 5-½" (140 mm) tie wraps (89105) are used for smaller diameter tubing. 7-½" (190 mm) tie wraps (89107) can be used for sizes up to 1".

For complete specifications, see submittal [SUB89100](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
89105	1000 Tie Straps - 5.5"	1	10	bag	\$ 99.93
89107	1000 Tie Straps - 7.5"	1	10	bag	\$ 105.25



DryAbove™ System

- Dry system that eliminates the “pain in the neck” of overhead work
- No structural changes required
- Ideal for retrofits or remodeling
- Inexpensive components keep material costs low

DryAbove™ components:


① EndBend™

② SpacerClip™

③ Heat Transfer Plate

④ ½" PEX Tubing

(plywood by others)

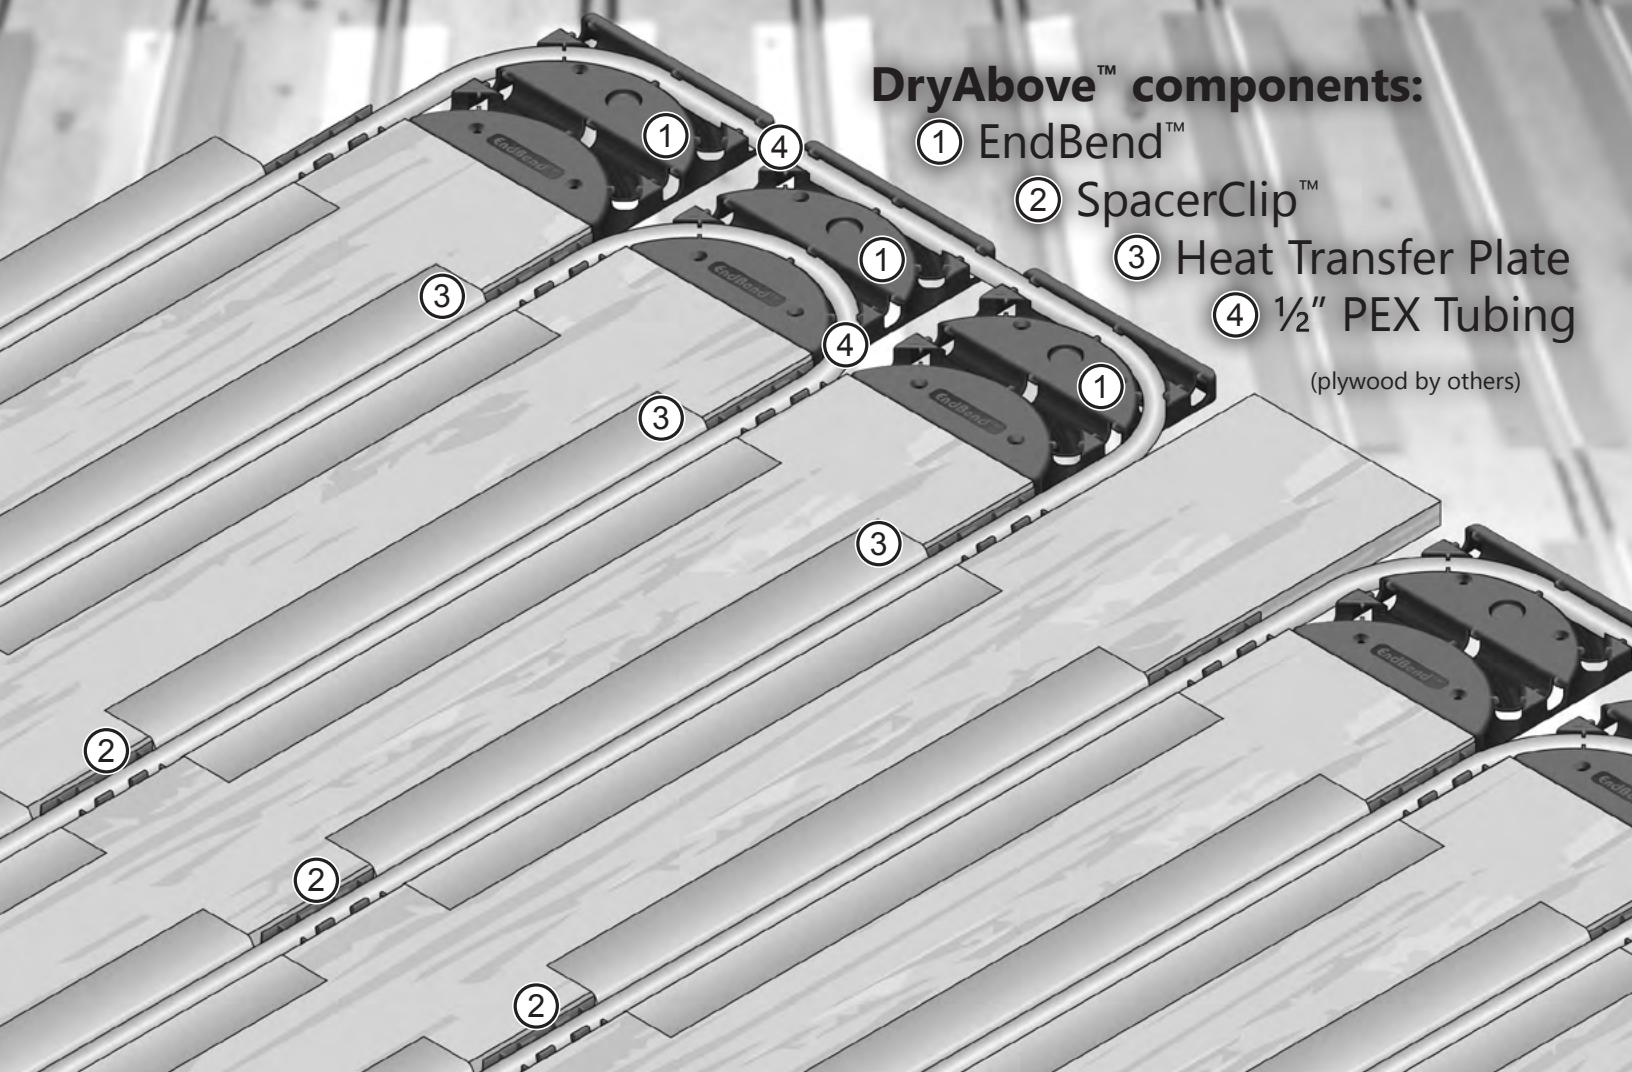



Aluminum Heat Transfer Plate

Stk# 87024

This plating is used to provide a direct transfer and heat distribution from the PEX piping to a wooden subfloor. They can be stapled to the underside of the subfloor in a DryBelow™ system or used above the subfloor in a DryAbove™ system.

End to end gaps between plates should be from 3" to 6" (75 to 150mm).

Plates measure 24" × 4-1/4" (610 mm × 108 mm).

For complete specifications, see submittal [SUB87000](#).

Stk#	Description	Pkg Qty	Skid Qty	Unit	List Price / Unit
87024	24" Aluminum Heat Transfer Plate for DryAbove™/ DryBelow™ Systems	250	6000	ea.	\$ 6.23



EndBend™ for DryAbove™ System

Stk# 87205

The EndBend™ allows for transition on the loop ends as well as supports for supply & return piping.

For complete specifications, see submittal [SUB87200](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
87205	EndBend™ for DryAbove™ System	25	50	ea.	\$ 8.57




SpacerClip™ for DryAbove™ System

Stk# 87305

The SpacerClip™ is placed between the heat transfer plates and holds the tubing in place. Tubing can be stepped into clip.

For complete specifications, see submittal [SUB87300](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
87305	SpacerClip™ for DryAbove™ System	50	500	ea.	\$ 2.86

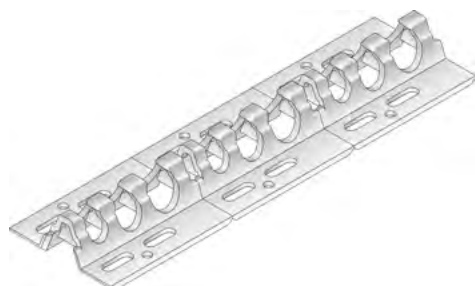

Tubing Tracking: 3/8", 1/2" and 5/8"

Stk# 89000

Tracking provides even tubing spacing in 3" (75 mm) multiples and exact regulation of tubing heights. Tubing is slightly elevated to ensure the concrete can totally encase tubing. Tubing, track & ground insulation assembly stays at the bottom of the pour to best utilize "angle of radiation"; eliminates hot and cold spots on the surface.

Tubing can be snapped in using your feet; no more bending down or tying is needed.

They can be fastened to many surfaces, such as concrete or plywood subfloors, steel Q decking, and polystyrene insulation.

Tracking comes in 4 ft (1.22 m) lengths.

For complete specifications, see submittal [SUB89000](#).

Stk#	Description	Pkg Qty	Skid Qty	Unit	List Price / Unit
89000	Tubing Tracking	400	10000	ft.	\$ 2.09



Conduit Elbows 86000 Series

High impact strength moulded plastic 90° long radius elbow, designed to direct and protect heating tubing in transition area where tubing enters and exits concrete slab.

For complete specifications, see submittal [SUB86000](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
86005	½" Conduit 90s	1	100	ea.	\$ 6.43
86020	¾" Conduit 90s	1	50	ea.	\$ 8.75
86022	¾" Conduit 90s	1	40	ea.	\$ 13.17
86028	1" Conduit 90s	1	50	ea.	\$ 16.23



Plastic Bend Support 86100 Series

Allows for easy bending support and removal.

For complete specifications, see submittal [SUB86100](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
86105	Plastic Bend Support for ¾" and ½" Tubing	1	300	ea.	\$ 1.98
86122	Plastic Bend Support for ¾" Tubing	1	400	ea.	\$ 4.12

Molybdate Based Corrosion Inhibitor Stk# 01205



The Molybdate Based Corrosion Inhibitor creates a protective monomolecular film over all internal surfaces of the heating system as the water circulates. The film is an anodic coating which immediately stops corrosive attack of the metallic parts. Molybdate will not harm PEX tubing or the manifolds and it is glycol compatible. Molybdate concentration between 100-150 ppm is recommended; higher concentrations are not harmful.

The molybdate will act as a preoperational cleaner if a side stream filter is installed and double the amount of molybdate required is added. The molybdate concentration should be checked after this procedure.

The contents of this 1 L (0.26 US gal) container will treat 182 L (48 US gal) of water.

Advantages: toxicity; non-pollutant; non-staining.

For more information, see submittal [SUB01205](#) and SDS [L2803](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
01205	1L Corrosion Inhibitor (Molybdate Based)	1	12	bottle	\$ 125.64



Purging Compound (Pre & Post Operational Cleaner) Stk# 01311

Purging compound for boilers and closed loop systems. Used as a preoperational cleaner and a post start-up cleaner. After refilling system with fresh water, ensure either a glycol or inhibitor is immediately added.

The contents of this 1 L (0.26 US gal) container will treat 33 L (9 US gal) of water.

For more information, see SDS [L2831](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
01311	1L Purging Compound (Pre & Post Operational Cleaner)	1	12	bottle	\$ 225.55



HeatLink Preventative Maintenance Water Analysis Stk# 00412

Water analysis service provided by HeatLink that tests a water sample for:

- Glycol
- Nitrite Inhibitor
- Molybdate Inhibitor
- pH Level
- Conductivity
- Hardness

A water sample of 400-500 mL (13.5-17 fl. oz.) in a clean plastic bottle is required.

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
00412	HeatLink Preventative Maintenance Water Analysis	1		ea.	\$ 498.34

Making the Complex Simple

HeatLink has found a way to make the complex more simple. With the Mechanical Room in a Box, some of the most common components of a radiant hydronic installation (mainly the wiring, pumps, and mixing valves), are installed on a panel with a plug, and boxed with a steel cover. This pre-wired, pre-fabricated, pre-engineered box is a time and money saving way to add control and consistency to an installation. Plug it in, and presto...you've got play!

Features

- Versatile solutions for simple or complex hydronic heating applications.
- Pre-fabricated, pre-engineered, pre-wired...pre-cise!
- High quality, reliable and standardized construction.
- Modular approach for ease of installation.
- Appliance-like protective steel cover; tamper-resistant.
- Closed hydronic systems can be extensively zoned.
- Solar energy sources can be seamlessly added.
- When properly piped, there is less component cycling...and more silence.


Advantages

- Pre-engineered solutions reduce design and quotation time.
- Reliable (ETL listed, UL 508, CSA standard), exceeds highest quality standards, with multiple test procedures for electrical and mechanical system components.
- Eliminate on-site design and reduced risk of on-site errors.
- Known cost; fewer surprises.
- Reduced installation times; time is money!
- Trouble-free start-ups every time!
- Fewer call-backs.
- Compact and aesthetically pleasing.
- Easily serviced and replaceable.
- Covered by a single warranty.




One Zone per Pump

The standard configuration of most panels is one thermostatic zone per pump circuit. This means that all areas served by the pump circuit are heated at the same time. Some panels have two pumps which allows for two zones, but what if more zones are desired? That's where secondary zoning comes in.

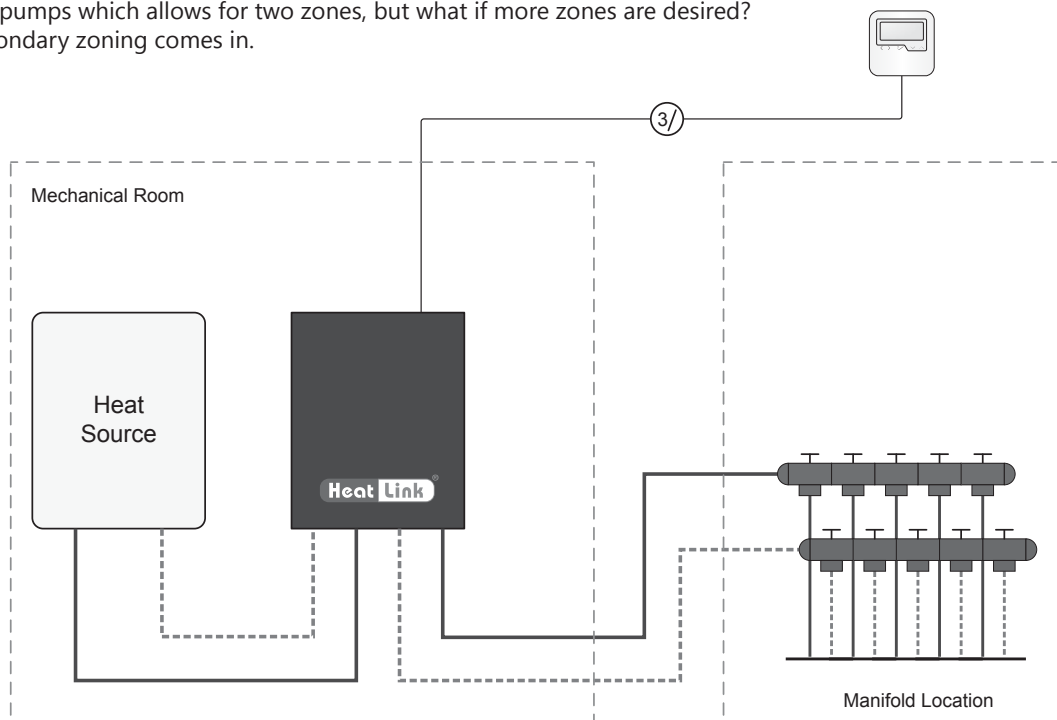

Secondary Zoning

The addition of a StatLink® module and manifold actuators allows for the creation of multiple zones. Each zone has its own thermostat that can control its temperature independently from the other zones. When any thermostat calls for heat, the StatLink® module will relay that demand to the panel and open the corresponding actuator(s).

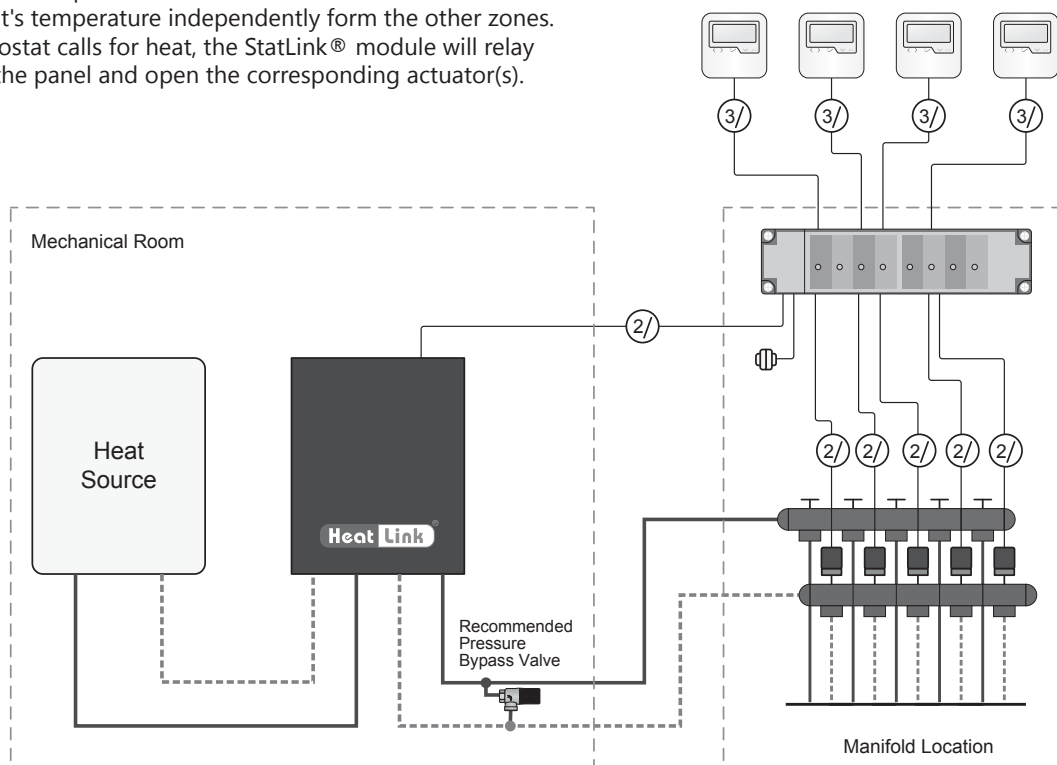

Residential Panel Selection

These panels are intended for use in single family residences or small commercial buildings. Multiple panels can be used in multi-family residences.

To select the panel that will work best for your system installation use the tables and definitions below. For additional assistance contact our technical or product support team.

Definitions

- An open system uses a domestic hot water tank as the heat source, and cycles new water into the system.
- A closed system uses a dedicated boiler, or tankless water heater, and cycles the same water through the system.

Pg#	Panel Stk#	Application			Heat Source				Open System ¹	Closed System	Zoning ²	Heating Manifold	Heat Exchanger	Mixing ³	Outdoor Reset	DHW Priority	24hr Timer for Potable	BTU/hr
		Indirect Fired DHW	Radiant	High Temp	Hot Water Tank ¹	Tankless Water Heater	Boiler	Built-in										
88	ECO Series	•	•				• ⁴			•	1–2					• ¹⁰		80/100,000
89	V100 Series	•	•				• ⁵			•	1–2					• ¹⁰		80/100,000
90	CAD Series	•	•				• ⁶			•	1–2					• ¹⁰		80/100,000
91	KNIGHT Series	•	•				• ⁷			•	1–2					• ¹⁰		80/100,000
92	TFT Series	•	•				• ⁸			•	1–2					• ¹⁰		80/100,000
93	BC Series	•	•				• ⁹			•	1–2					• ¹⁰		80/100,000
94	ELBP Series		•					•		•	1							18/30/50,000
95	ELBP-TS Series		•					•		•	1	•						18/30/50,000
96	TMP040/070		•		•		•		•	•	1			•			•	40/70,000
97	TMP070Z		•		•		•		•	•	4			•			•	70,000
98	TMP070RS		•				•			•	1			•	•			70,000
99	TMP085DP		•		•		•		•	•	2			•			•	85,000
100	TMP-Multi	•	•	•			•			•	2–5			•		•		
102	TWH-P Series		•			•	•		•	•	1			•		opt	•	70,000
103	TWH-Z Series		•			•	•		•	•	4			•		opt	•	70,000
104	HEP Series		•		•	•			•	•	1		•			opt	•	25/80/95,000
105	HEP025R		•		•	•			•	•	1		•			opt		25,000
106	HEP-RT Series		•		•	•			•	•	1-2		•			opt	•	25/80,000

Notes

1. If permitted by local codes.
2. Number of zones supported by the panel. Additional zones on a closed system is possible with secondary zoning.
3. Mixing allows the panel to regulate the secondary supply water temperature. Without mixing, the supply water temperature is regulated by the heat source.
4. ECO Series panels are designed for use with Weil-McLain ECO boilers.
5. V100 Series panels are designed for use with Viessmann 100-W boilers.
6. CAD Series panels are designed for use with Lochinvar Cadet boilers.
7. KNIGHT Series panels are designed for use with Lochinvar Knight boilers.
8. TFT Series panels are designed for use with NTI Trinity Tft 60-110 boilers.
9. IBC Series panels are designed for use with IBC SL G2 boilers.
10. DHW Priority is controlled by the boiler.

ECO Boiler Panels ECO Series

These panels are designed to work with Weil-McLain ECO boilers. The primary piping matches up to the ECO boiler system supply and return. The cool gray color of the enclosure matches the ECO boiler.

Heating sequence of operation (ECO1ZN3P):

- A heat demand from the room thermostat will send a heating demand to the boiler.
- The boiler will turn on the Primary pump and Radiant pump.
- The supply water temp is determined by the boiler.
- When the heat demand is removed, the Radiant and Primary pumps will stop.

Heating sequence of operation (ECO2ZN4P):

- A heat demand from either room thermostat will close its corresponding relay in the panel and send a heating demand to the boiler.

- The boiler will turn on the Primary pump and appropriate Radiant pump.
- The supply water temp is determined by the boiler.
- When the heat demand is removed, the Radiant pumps will stop and the Primary pump will continue to run for as long as the boiler control requires.

DHW sequence of operation (ECO1ZN3P & ECO2ZN4P):


- A demand from the DHW aquastat to the boiler, the boiler will turn on the DHW pump and disable the Primary and Radiant pumps (if running) and change the supply water temp according to its settings.
- When the DHW demand is removed, the DHW pump will continue to run for as long as the boiler control requires.

For complete specifications, see submittal [SUBECOxZNxP](#).

Panel Stk#	Pumps		
	Primary	DHW	Radiant
ECO1ZN3P	•	•	1
ECO2ZN4P	•	•	2

Panel Components

- ① Primary Pump
- ② DHW Pump
- ③ Radiant 1 Pump
- ④ Radiant 2 Pump (ECO2ZN4P only)
- ⑤ Electrical Connection Box
- ⑥ 24V Terminal Strip (ECO2ZN4P only)
- ⑦ 24Vac Plug-in Transformer (ECO2ZN4P only)
- ⑧ Isolation Valve
- ☒ Panel Cover (not shown)

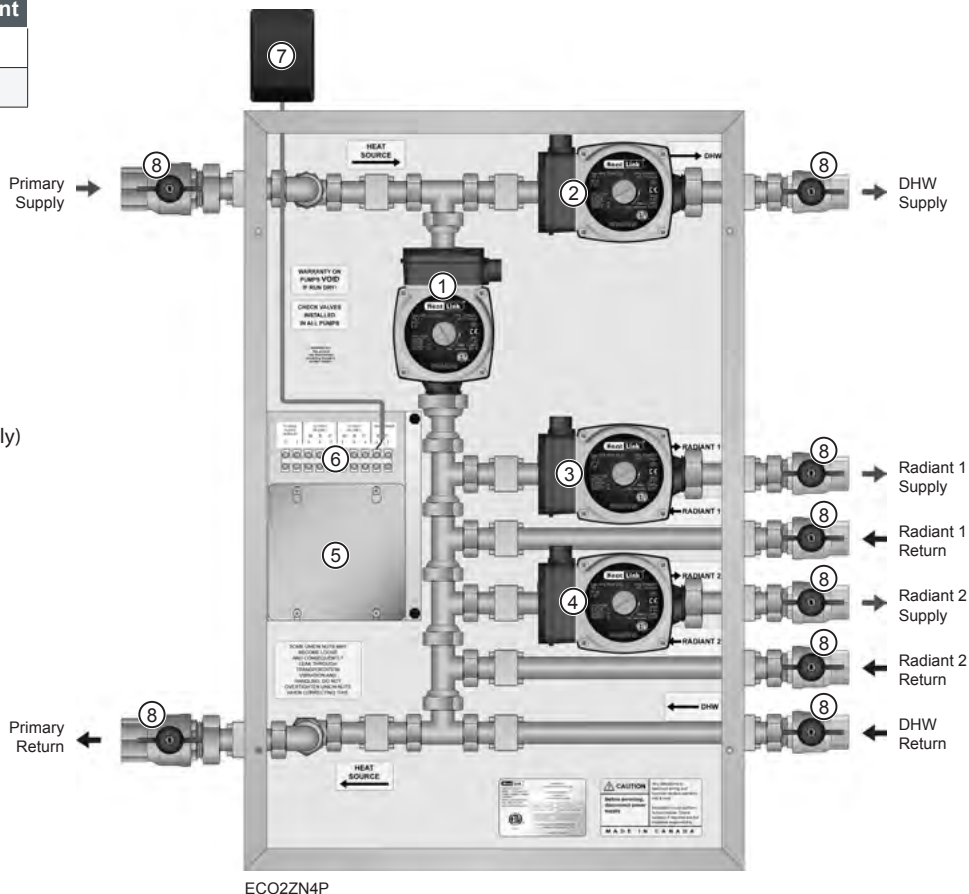

Stk#	Description	Pkg Qty	Unit	List Price / Unit
ECO1ZN3P	ECO Boiler Panel 3 Pump	1	ea.	\$ 4,040.00
ECO2ZN4P	ECO Boiler Panel High Capacity 4 Pump	1	ea.	\$ 4,656.00

V100 Boiler Panels

V100 Series

These panels are designed to work with Viessmann Vitodens 100-W boilers. The panel primary piping matches up to the Vitodens boiler system supply and return. The white color of the enclosure matches the Vitodens 100-W boiler. The V103 panel is designed to work with the Combi Boiler.

Heating sequence of operation (V101):

- A heat demand from the room thermostat will close its relay in the panel and send a heating demand to the boiler.
- The boiler will turn on the Primary pump and Radiant pump.
- The supply water temp is determined by the boiler.
- When the heat demand is removed, the Radiant pump will stop and the Primary pump will continue to run for as long as the boiler control requires.

Heating sequence of operation (V102 & V103):

- A heat demand from either room thermostat will close its corresponding relay in the panel and send a heating demand to the boiler.

- The boiler will turn on the Primary pump and appropriate Radiant pump.
- The supply water temp is determined by the boiler.
- When the heat demand is removed, the Radiant pumps will stop and the Primary pump will continue to run for as long as the boiler control requires.

DHW sequence of operation (V101 & V102):


- A demand from the DHW aquastat will close its relay in the panel, disable the Radiant pump(s) (if running), and send a DHW demand to the boiler.
- The boiler will turn on the Primary and DHW pumps and change the supply water temp according to its settings.
- When the DHW demand is removed, the DHW pump will stop and the Primary pump will continue to run for as long as the boiler control requires.

For complete specifications, see submittal [SUBV100](#).

Panel Stk#	Pumps		
	Primary	DHW	Radiant
V101	•	•	1
V102	•	•	2
V103			3

Panel Components

- ① Primary Pump (V101 & V102)
- ② DHW Pump (V101 & V102)
- ③ Radiant 3 Pump (V103 only)
- ④ Radiant 1 Pump
- ④ Radiant 2 Pump (V102 & V103)
- ⑤ Electrical Connection Box
- ⑥ 24V Terminal Strip
- ⑦ 24Vac Plug-in Transformer
- ⑧ Isolation Valve
- ⑨ Drain Valve
- ☒ Panel Cover (not shown)

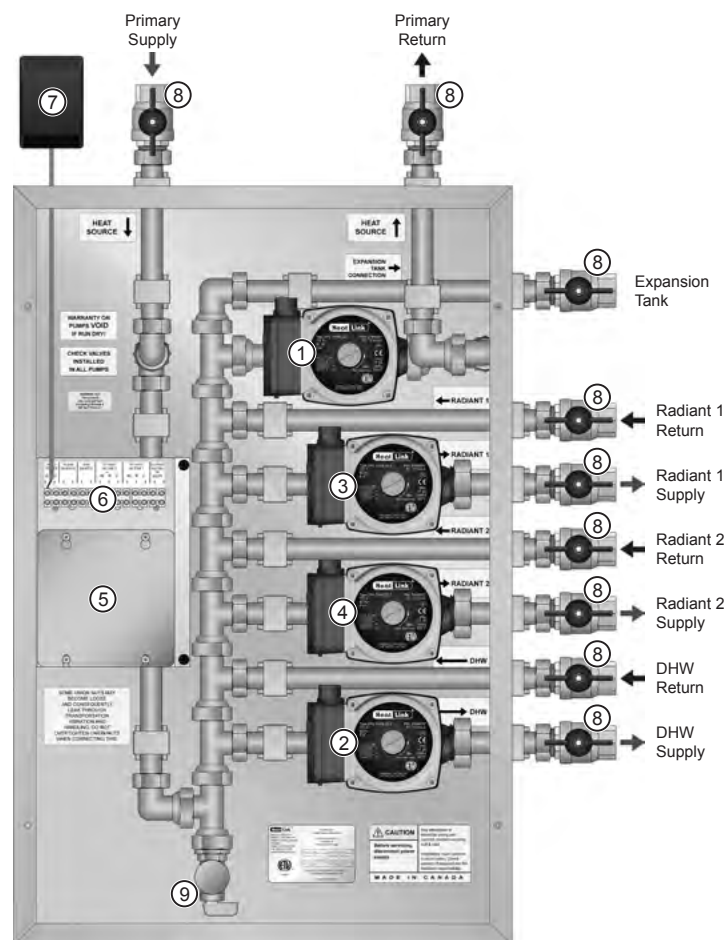

V102

Stk#	Description	Pkg Qty	Unit	List Price / Unit
V101	V100 Boiler Panel 1 Htg 1 DHW	1	ea.	\$ 4,231.00
V102	V100 Boiler Panel 2 Htg 1 DHW	1	ea.	\$ 5,017.00
V103	V100 Boiler Panel 3 Htg	1	ea.	\$ 5,017.00

CAD Boiler Panels CAD Series

These panels are designed to work with Lochinvar Cadet boilers. The panel primary piping matches up to the Cadet boiler system supply and return. The dark grey color of the enclosure is similar to the Cadet boilers.

Heating sequence of operation (CAD01):

- A heat demand from the room thermostat will send a heating demand to the boiler.
- The boiler will turn on the Primary pump and Radiant pump.
- The supply water temp is determined by the boiler.
- When the heat demand is removed, the Radiant and Primary pumps will stop.

Heating sequence of operation (CAD02):

- A heat demand from either room thermostat will close its corresponding relay in the panel and send a heating demand to the boiler.

- The boiler will turn on the Primary pump and appropriate Radiant pump.
- The supply water temp is determined by the boiler.
- When the heat demand is removed, the Radiant pumps will stop and the Primary pump will continue to run for as long as the boiler control requires.

DHW sequence of operation (CAD01 & CAD02):


- A demand from the DHW aquastat to the boiler, the boiler will turn on the DHW pump, and turn off the Primary Pump, and the Radiant pump(s) (if running) and change the supply water temp according to its settings.
- When the DHW demand is removed, the DHW pump will continue to run for as long as the boiler control requires.

For complete specifications, see submittal [SUBCAD00](#).

Panel Stk#	Pumps		
	Primary	DHW	Radiant
CAD01	•	•	1
CAD02	•	•	2

Panel Components

- ① Primary Pump
- ② DHW Pump
- ③ Radiant 1 Pump
- ④ Radiant 2 Pump (CAD02 only)
- ⑤ Electrical Connection Box
- ⑥ 24V Terminal Strip (CAD02 only)
- ⑦ 24Vac Plug-in Transformer (CAD02 only)
- ⑧ Isolation Valve
- ☒ Panel Cover (not shown)

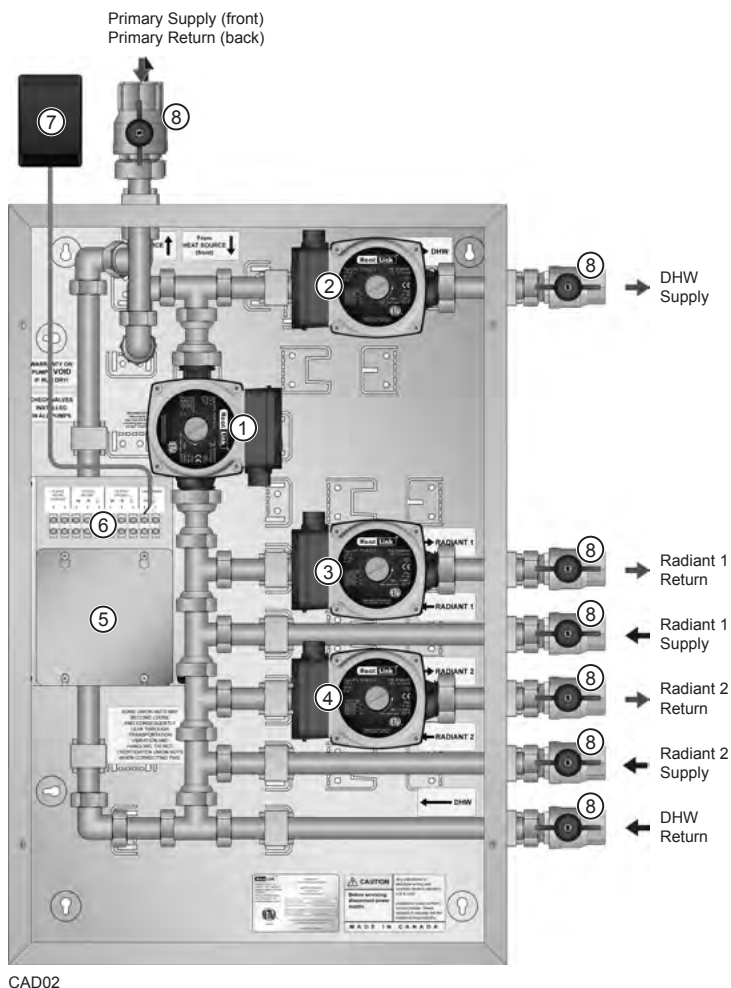

Stk#	Description	Pkg Qty	Unit	List Price / Unit
CAD01	CAD Boiler Panel 3 Pump	1	ea.	\$ 4,040.00
CAD02	CAD Boiler Panel High Capacity 4 Pump	1	ea.	\$ 4,656.00

KNIGHT Boiler Panels

KNIGHT Series

These panels are designed to work with Lochinvar Knight boilers.

Heating sequence of operation (Knight01):

- A heat demand from the room thermostat will send a heating demand to the boiler.
- The boiler will turn on the Primary pump and Radiant pump.
- The supply water temp is determined by the boiler.
- When the heat demand is removed, the Radiant and Primary pumps will stop.

Heating sequence of operation (Knight02):

- A heat demand from either room thermostat will close its corresponding relay in the panel and send a heating demand to the boiler.
- The boiler will turn on the Primary pump and appropriate Radiant pump.

- The supply water temp is determined by the boiler.
- When the heat demand is removed, the Radiant pumps will stop and the Primary pump will continue to run for as long as the boiler control requires.

DHW sequence of operation (Knight01 & Knight 02):


- A demand from the DHW aquastat to the boiler, the boiler will turn on the DHW pump, and turn off the Primary pump, and the Radiant pump(s) (if running) and change the supply water temp according to its settings.
- When the DHW demand is removed, the DHW pump will continue to run for as long as the boiler control requires.

For complete specifications, see submittal [SUBKNIGHT00](#).

Panel Stk#	Pumps		
	Primary	DHW	Radiant
Knight01	•	•	1
Knight02	•	•	2

Panel Components

- ① Primary Pump
- ② DHW Pump
- ③ Radiant 1 Pump
- ④ Radiant 2 Pump (Knight02 only)
- ⑤ Electrical Connection Box
- ⑥ 24V Terminal Strip (Knight02 only)
- ⑦ 24Vac Plug-in Transformer (Knight02 only)
- ⑧ Isolation Valve
- ☒ Panel Cover (not shown)

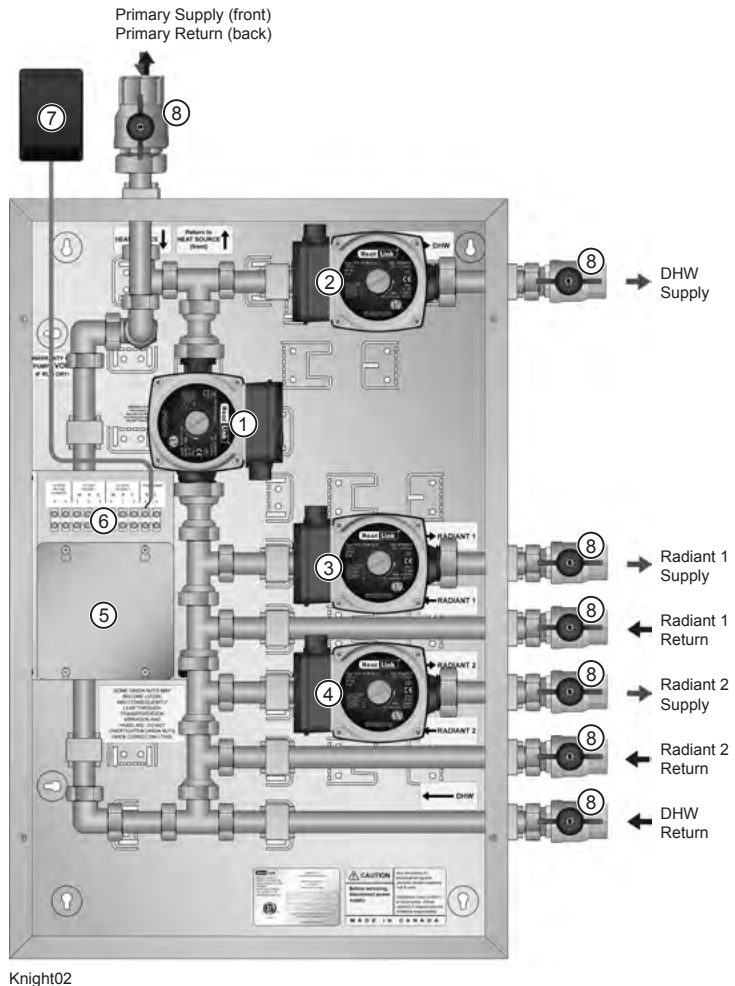

Knight02

Stk#	Description	Pkg Qty	Unit	List Price / Unit
Knight01	Panel for Knight Wall Mount Boiler (3 Pump)	1	ea.	\$ 4,040.00
Knight02	Panel for Knight Wall Mount Boiler (4 Pump)	1	ea.	\$ 4,656.00

TFT Boiler Panels

TFT Series

These panels are designed to for use with NTI Trinity Tft 60-110 boilers.

Heating sequence of operation (TFT01):

- A heat demand from the room thermostat will send a heating demand to the boiler.
- The boiler will turn on the Primary pump and Radiant pump.
- The supply water temp is determined by the boiler.
- When the heat demand is removed, the Radiant and Primary pumps will stop.

Heating sequence of operation (TFT02):

- A heat demand from either room thermostat will close its corresponding relay in the panel and send a heating demand to the boiler.
- The boiler will turn on the Primary pump and appropriate Radiant pump.

- The supply water temp is determined by the boiler.
- When the heat demand is removed, the Radiant pumps will stop and the Primary pump will continue to run for as long as the boiler control requires.

DHW sequence of operation (TFT01 & TFT02):


- A demand from the DHW aquastat will send a DHW demand to the boiler.
- The boiler will turn on the DHW pump and disable the Primary and Radiant pump(s) (if running) and change the supply water temp according to its settings.
- When the DHW demand is removed, the DHW pump will continue to run for as long as the boiler control requires.

For complete specifications, see submittal [SUBTFT00](#).

Panel Stk#	Pumps		
	Primary	DHW	Radiant
TFT01	•	•	1
TFT02	•	•	2

Panel Components

- ① Primary Pump
- ② DHW Pump
- ③ Radiant 1 Pump
- ④ Radiant 2 Pump (TFT02 only)
- ⑤ Electrical Connection Box
- ⑥ 24V Terminal Strip (TFT02 only)
- ⑦ 24Vac Plug-in Transformer (TFT02 only)
- ⑧ Isolation Valve
- ☒ Panel Cover (not shown)

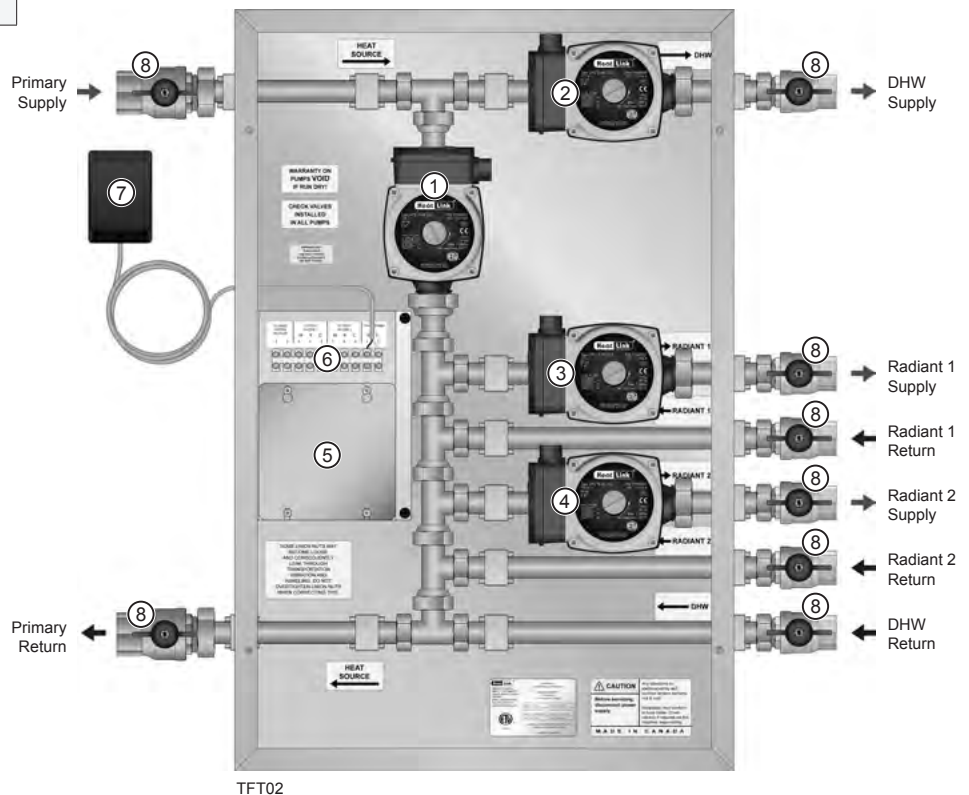

Stk#	Description	Pkg Qty	Unit	List Price / Unit
TFT01	TFT01 Boiler Panel 3 Pump	1	ea.	\$ 4,040.00
TFT02	TFT02 High Capacity Boiler 4 Pump	1	ea.	\$ 4,656.00

BC Boiler Panels BC Series

The BC G2-1 and BC G2-2 panels are designed to work with IBC SL G2 boilers. The panel primary piping matches up to the IBC boiler system supply and return.

The BC G2-3 panel will work with IBC DC series combi boilers.

The panel has three or four Grundfos UPS15-58 pumps. All of which are controlled by the boiler.

All the thermostats, and the DHW sensor are wired to the boiler.


The water temperature and DHW priority is controlled by the boiler.

For complete specifications, see submittal [SUBBCG2](#).

Panel Stk#	Pumps		
	Primary	DHW	Radiant
BC G2-1	•	•	1
BC G2-2	•	•	2
BC G2-3			3

Panel Components

- ① Primary Pump (BC G2-1 & BC G2-2)
- ② DHW Pump (BC G2-1 & BC G2-2)
- ③ Radiant 3 Pump (BC G2-3 only)
- ④ Radiant 1 Pump
- ⑤ Radiant 2 Pump (BC G2-2 only)
- ⑥ 120V Terminal Strip for pump connections
- ⑦ Isolation Valve
- ☒ Panel Cover (not shown)

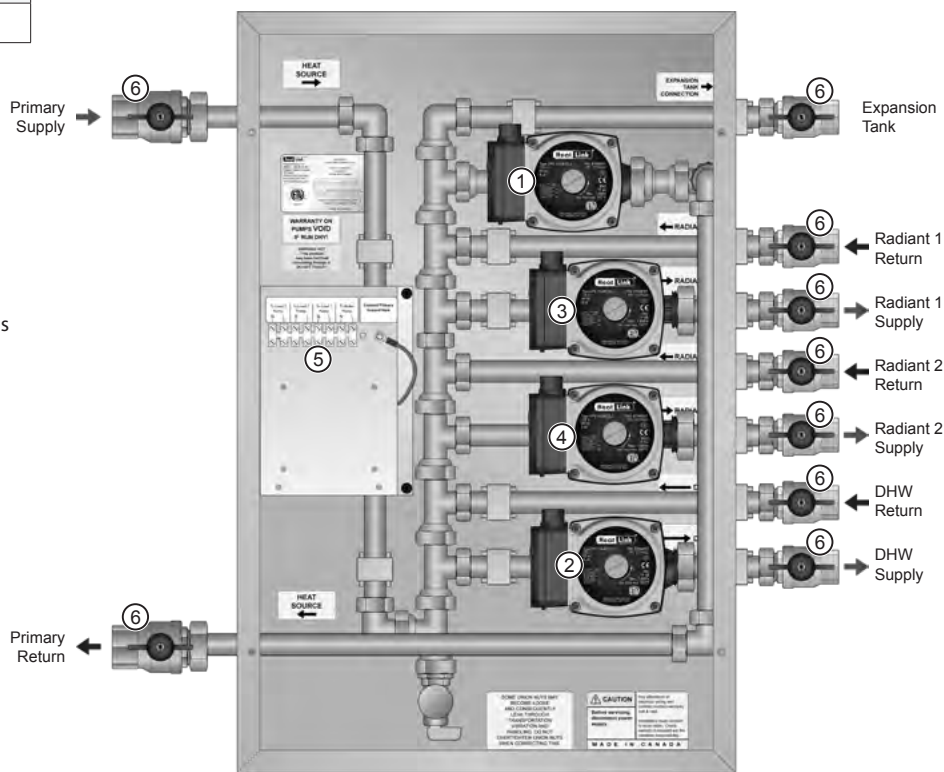

BC G2-2

Stk#	Description	Pkg Qty	Unit	List Price / Unit
BC G2-1	Standard Boiler Panel 3 Pump	1	ea.	\$ 4,244.00
BC G2-2	High Capacity Boiler Panel 4 Pump	1	ea.	\$ 5,031.00
BC G2-3	BC G.Combi Boiler Panel	1	ea.	\$ 4,471.00

ELBP Electric Boiler Panel ELBP Series

The Electric Boiler Panel's primary application is for heating small areas where quick installation is needed or alternative fuel sources aren't available.

The Electric Boiler Panel includes a 6.7kW, 11kW, or 18kW electric boiler, automatic air vent, pressure relief valve, strainer, pump, connection for an expansion tank, 24Vac transformer, StatLink® 6 Zone Base Module, and electrical box for 240V connection.

Sequence of operation:


- When there is a call for heat from the thermostat wired to the StatLink® Module, the pump is activated; the electric boiler is then activated via a flow meter and supplies heat based on the user settings.

For complete specifications, see submittal [SUBELBP000](#).

Panel Components

- ① Electric Boiler
- ② Primary Pump
- ③ 240Vac Electrical Connection Box
- ④ 120Vac Terminal Strip
- ⑤ 24Vac Transformer
- ⑥ StatLink® Module
- ⑦ Strainer
- ⑧ Automatic Air Vent
- ⑨ Pressure Relief Valve
- ⑩ Isolation Valve
- ☒ Panel Enclosure (not shown)

ELBP30

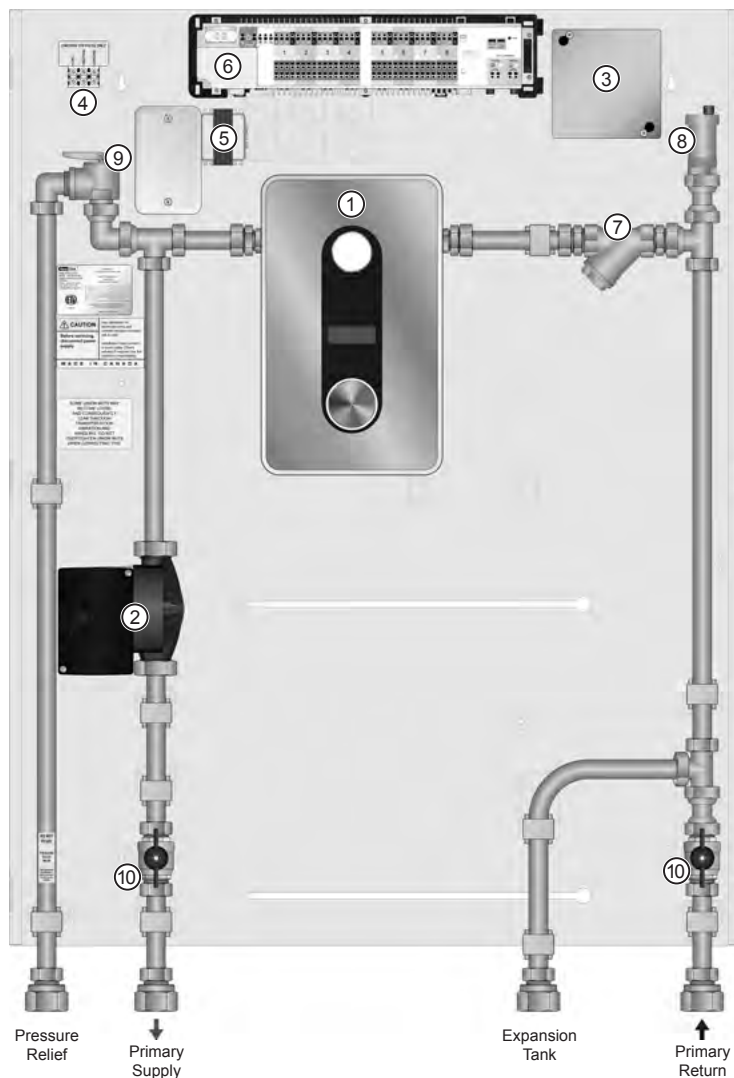

Stk#	Description	Pkg Qty	Unit	List Price / Unit
ELBP18	Electric Boiler Panel 18,000BTU	1	ea.	\$ 4,639.00
ELBP30	Electric Boiler Panel 30,000BTU	1	ea.	\$ 8,170.00
ELBP50	Electric Boiler Panel 50,000BTU	1	ea.	\$ 8,346.00

ELBP Electric Boiler Panel with Manifold ELBP-TS Series

The Electric Boiler Panel's primary application is for heating small areas where quick installation is needed or alternative fuel sources aren't available.

The Electric Boiler Panel includes a 6.7kW, 11kW, or 18kW electric boiler, automatic air vent, pressure relief valve, strainer, pump, connection for an expansion tank, TwistSeal® Multiport Mini Manifold, 24Vac transformer, StatLink® 6 Zone Base Module, and electrical box for 240V connection.

Sequence of operation:


- When there is a call for heat from the thermostat wired to the StatLink® Module, the pump is activated; the electric boiler is then activated via a flow meter and supplies heat based on the user settings.

For complete specifications, see submittal [SUBELBP000TS](#).

Panel Components

- ① Electric Boiler
- ② Primary Pump
- ③ 240Vac Electrical Connection Box
- ④ 120Vac Terminal Strip
- ⑤ 24Vac Transformer
- ⑥ StatLink® Module
- ⑦ Strainer
- ⑧ Automatic Air Vent
- ⑨ Pressure Relief Valve
- ⑩ Isolation Valve
- ⑪ Supply Manifold
- ⑫ Return Manifold
- ⑬ Thermometer
- ⑭ Hosebib
- ☒ Panel Enclosure (not shown)

ELBP50TS7

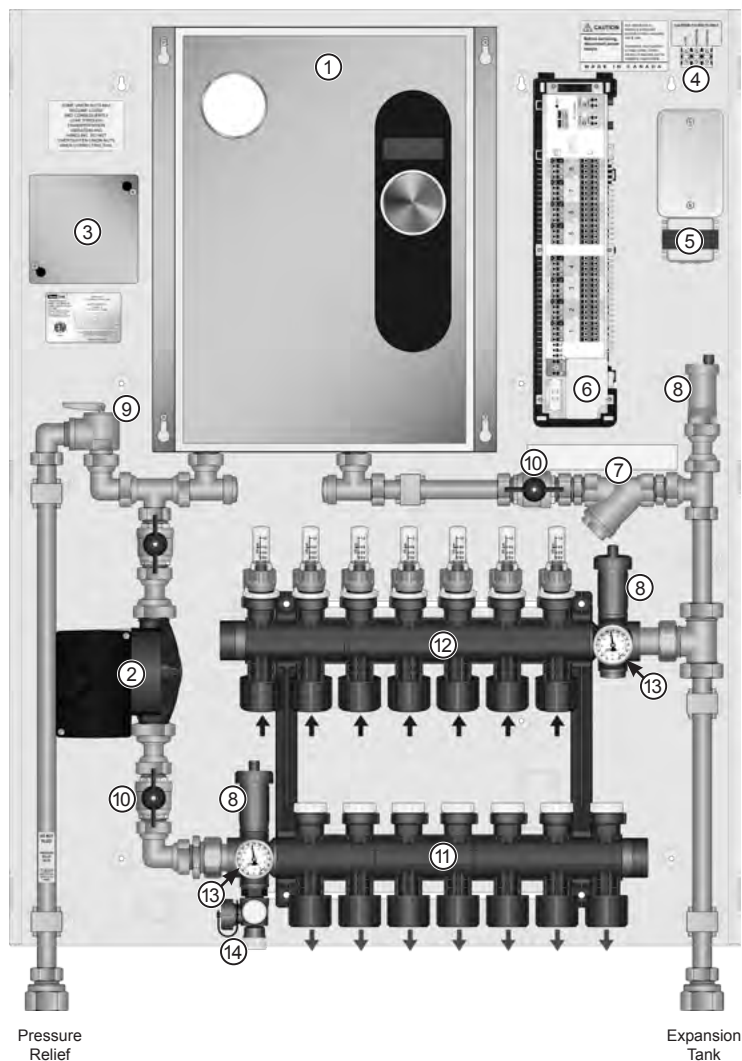

Stk#	Description	Pkg Qty	Unit	List Price / Unit
ELBP18TS3	Electric Boiler Panel 18,000BTU with 3 Loop Twist Seal Mini Multiport	1	ea.	\$ 5,549.00
ELBP18TS5	Electric Boiler Panel 18,000BTU with 5 Loop Twist Seal Mini Multiport	1	ea.	\$ 5,759.00
ELBP30TS3	Electric Boiler Panel 30,000BTU with 3 Loop Twist Seal Mini Multiport	1	ea.	\$ 8,679.00
ELBP30TS5	Electric Boiler Panel 30,000BTU with 5 Loop Twist Seal Mini Multiport	1	ea.	\$ 8,734.00
ELBP30TS6	Electric Boiler Panel 30,000BTU with 6 Loop Twist Seal Mini Multiport	1	ea.	\$ 8,995.00
ELBP30TS7	Electric Boiler Panel 30,000BTU with 7 Loop Twist Seal Mini Multiport	1	ea.	\$ 9,103.00
ELBP30TS8	Electric Boiler Panel 30,000BTU with 8 Loop Twist Seal Mini Multiport	1	ea.	\$ 9,213.00
ELBP50TS7	Electric Boiler Panel 50,000BTU with 7 Loop Twist Seal Mini Multiport	1	ea.	\$ 9,690.00

TMP 40/70 MBH 3-Way Mixing Panels Stk# TMP040 & TMP070

The TMP 3-Way Mixing Panel's primary application is as a single zone mixing device where there are no flow requirements in the primary loop.

Intended to be used with DHW tanks as a heat source, the PLC is programmed with a 24hr timer for potable applications. When not used with a DHW tank as a heat source, secondary zoning downstream of the panel is possible.


A DHW priority option for these panels is not available.

These panels can also be used as subpanels to provide additional mixed temperature loops.

Sequence of operation:

- When the thermostat calls for heat, its internal 24V contacts close, the auxiliary terminals close, and the pump turns on.
- As the pump moves fluid through the panel the thermostatic mixing valve adjusts the fluid temperature based on the user settings.
- When the requirements of the thermostat are met, the internal contacts of the thermostat open, the auxiliary contacts open, and the pump stops.
- The pump is activated once every 24 hours, for 15 minutes, to ensure that potable water in the piping is not stagnant.

For complete specifications, see submittal [SUBTMP000](#).

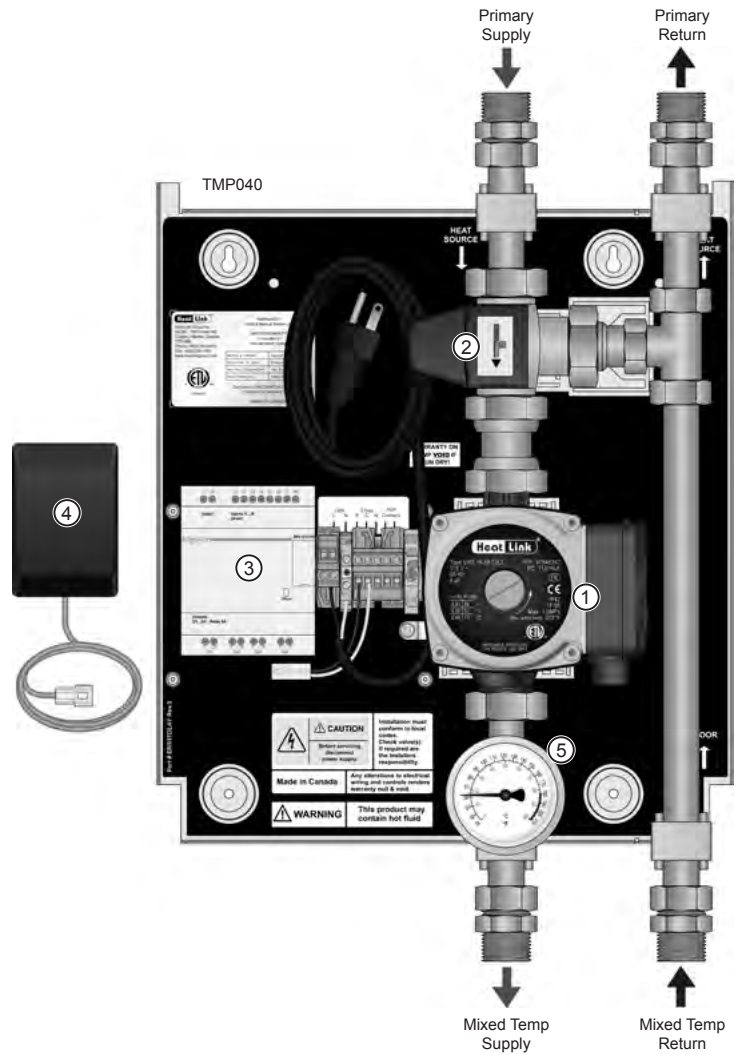

Panel Components

- ① Pump
- ② 3-Way Thermostatic Mixing Valve
- ③ PLC Control with 6' Power Cord
 - 24hr Timer for Potable Applications
 - Auxiliary Dry Contacts for Heat Source
 - Thermostat Inputs and Actuator Outputs for 1 Zone
- ④ 24Vac Plug-in Transformer
- ⑤ Thermometer
- ☑ Panel Enclosure (not shown)

Stk#	Description	Pkg Qty	Unit	List Price / Unit
TMP040	TMP 40MBH 3-Way Mixing Panel	1	ea.	\$ 2,860.00
TMP070	TMP 70MBH 3-Way Mixing Panel	1	ea.	\$ 3,166.00

TMP 70 MBH 3-Way Mixing Panel with Zoning
Stk# TMP070Z

The TMP 3-Way Mixing Panel's primary application is as a **multizone** mixing device where there are no flow requirements in the primary loop.

Intended to be used with DHW tanks as a heat source, the PLC is programmed with a 24hr timer for potable applications. The panel has thermostat inputs and actuator outputs for up to four zones (two actuators per zone). When used with a DHW tank as a heat source, secondary zoning downstream of the panel is possible (subject to local codes).

A DHW priority option for this panel is not available.


Sequence of operation:

- When a thermostat calls for heat, its internal 24V contacts close, the auxiliary terminals close, the pump turns on, and its corresponding zone actuator opens.
- As the pump moves fluid through the panel the thermostatic mixing valve adjusts the fluid temperature based on the user settings.
- When the requirements of the thermostat are met, the internal contacts of the thermostat open, the auxiliary contacts open, the pump stops and the zone actuator closes.
- The pump is activated, and all zone actuators open, once every 24 hours, for 15 minutes, to ensure that potable water in the piping is not stagnant.

For complete specifications, see submittal [SUBTMP000Z](#).

Panel Components

- ① Pump
- ② 3-Way Thermostatic Mixing Valve
- ③ PLC Control with 6' Power Cord
 - 24hr Timer for Potable Applications
 - Auxiliary Dry Contacts for Heat Source
 - Thermostat Inputs and Actuator Outputs for 4 Zones
- ④ 24Vac Plug-in Transformer
- ⑤ Thermometer
- ☑ Panel Enclosure (not shown)

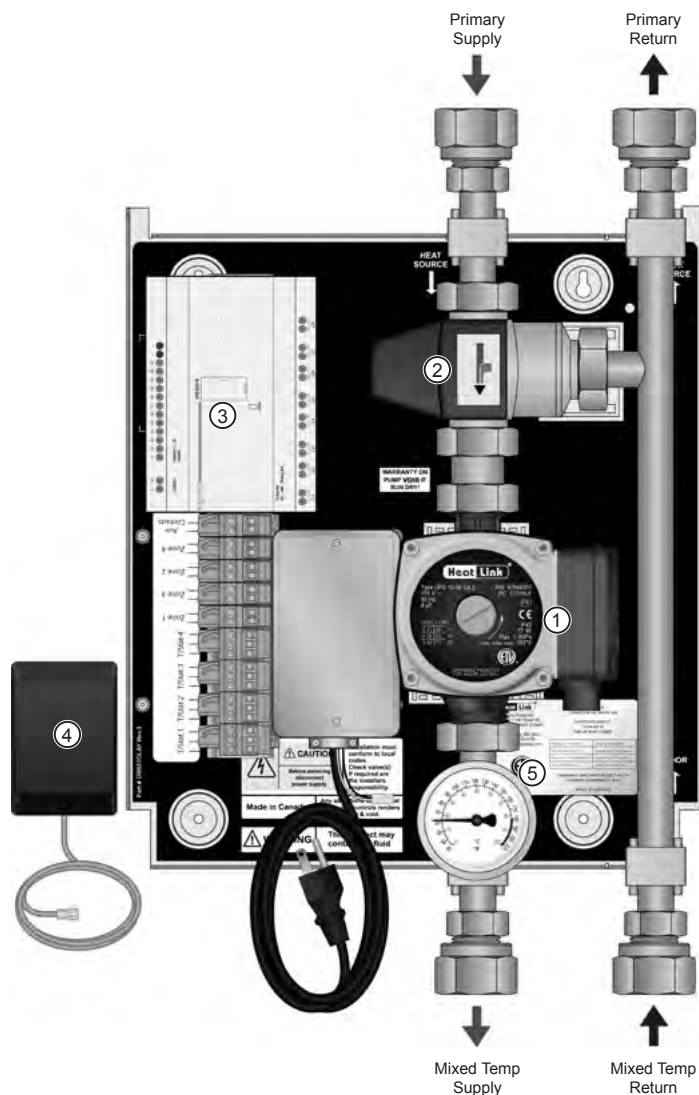

Stk#	Description	Pkg Qty	Unit	List Price / Unit
TMP070Z	TMP 70MBH 3-Way Mixing Panel with Zoning	1	ea.	\$ 4,436.00

TMP 70 MBH 3-Way Mixing Panel with Outdoor Reset Stk# TMP070RS

The TMP three way mixing panel's primary application is as a single zone mixing device where there are no flow requirements in the primary loop. The #31355 Compact Mixing Control with the 3-way mixing valve and actuator will automatically regulate the water temperature in secondary circuit based on outdoor temperature.


Sequence of operation:

- When the panel receives a heat demand, the 31355 control is activated.
- If the control is not in Warm Weather Shut Down, the control operates the mixing valve, boiler, and pump to maintain an outdoor reset mix target temperature at the mix supply sensor.
- When the heat demand is removed, the control will close the mixing valve, open the boiler contacts, and stop the pump after the purge time.
- If the pump has not run in the past 3 days, the pump will run for 10 seconds.
- If the mixing valve has not operated its full stroke in the past 3 days, the control will operate the valve to the fully open position and then back to the fully closed position.

For complete specifications, see submittal [SUBTMP070RS](#).

Panel Components

- ① Secondary Pump
- ② 3-Way Mixing Valve and Mixing Valve Motor
- ③ Relay Box with 6' Power Cord
- ④ HeatLink® #31355 Compact Mixing Control
- ⑤ 24Vac Transformer (hidden)
- ⑥ Thermometer
- ⑦ Supply Sensor
- ⑧ Outdoor Sensor
- ☒ Panel Enclosure (not shown)

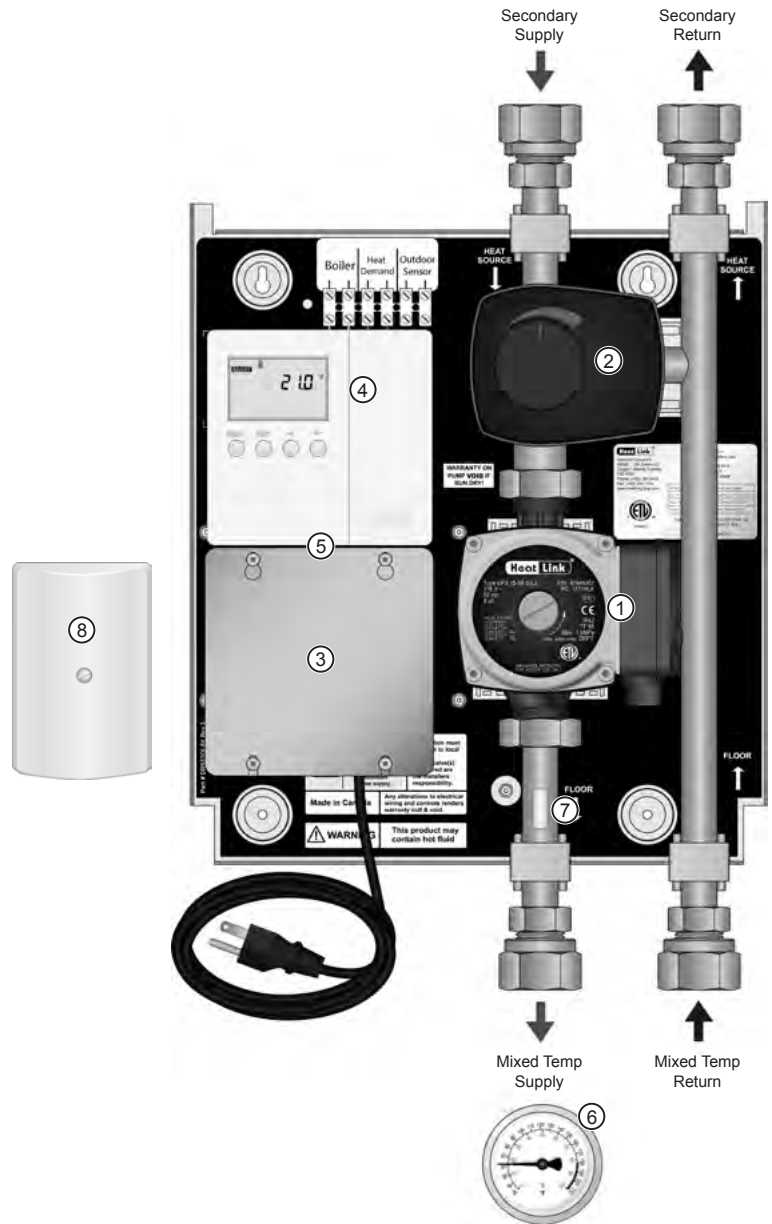

Stk#	Description	Pkg Qty	Unit	List Price / Unit
TMP070RS	TMP 70MBH 3-Way Mixing Panel (Automatic Outdoor Reset)	1	ea.	\$ 6,084.00

TMP 85 MBH Dual Pump Mixing Panel Stk# TMP085DP

The TMP 3-Way Mixing Panel's primary application is as a single temperature mixing device where there are no flow requirements in the primary loop.

Intended to be used with DHW tanks as a heat source, the PLC is programmed with a 24hr timer for potable applications. The TMP085DP not only allows for higher output, but it is also a 2-zone panel. So even with a DHW heat source, you can now have two radiant floor zones. When not used with a DHW tank as a heat source, secondary zoning downstream of the panel is possible.

A DHW priority option for this panel is not available.

These panels can also be used as subpanels to provide additional mixed temperature loops.


Sequence of operation:

- When the thermostat calls for heat, its internal 24V contacts close, the auxiliary terminals close, and the appropriate pump turns on.
- As the pump moves fluid through the panel the thermostatic mixing valve adjusts the fluid temperature based on the user settings.
- When the requirements of the thermostat are met, the internal contacts of the thermostat open, the auxiliary contacts open, and the corresponding pump(s) stops.
- The pump is activated once every 24 hours, for 15 minutes, to ensure that potable water in the piping is not stagnant.

For complete specifications, see submittal [SUBTMP000DP](#).

Panel Components

- ① Zone 1 Pump with Check Valve
- ② Zone 2 Pump with Check Valve
- ③ 3-Way Thermostatic Mixing Valve
- ④ PLC (Programmable Logic Control)
 - 24hr Timer for Potable Applications
 - Auxiliary Dry Contacts for Heat Source
- ⑤ 120Vac 6' Power Cord
- ⑥ 24Vac Plug-in Transformer
- ⑦ Thermometer
- ☒ Panel Enclosure (not shown)

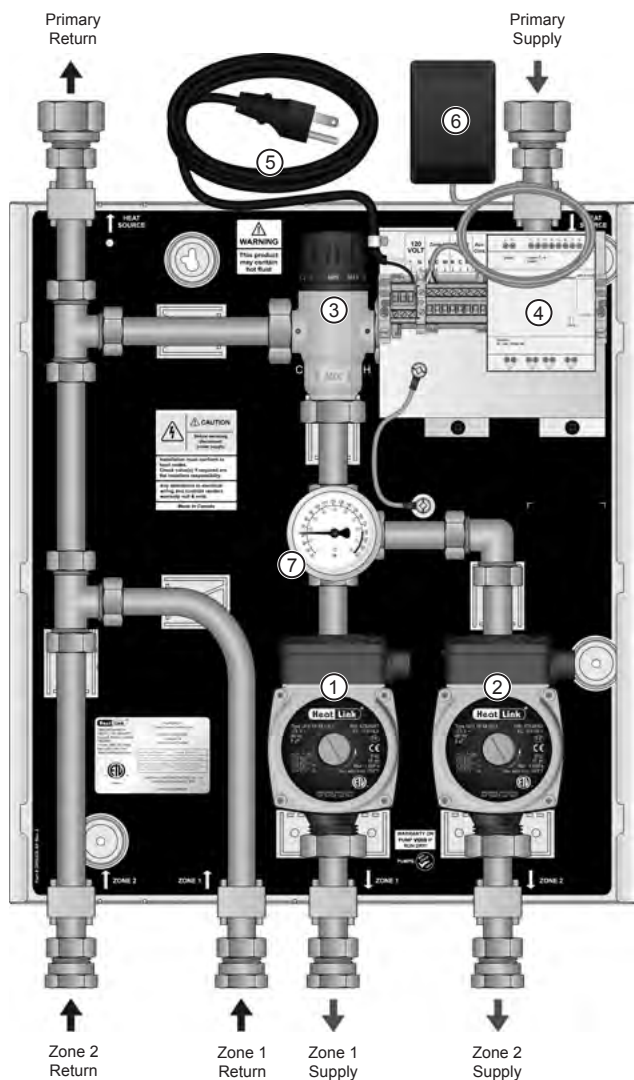

Stk#	Description	Pkg Qty	Unit	List Price / Unit
TMP085DP	TMP 85MBH Dual Pump 3-Way Mixing panel	1	ea.	\$ 4,635.00

TMP-Multi Panels TMP-M Series

The TMP-Multi Panel series all share a primary loop, optional primary pump, two to five secondary circuits, simple electrical wiring, thermometers, and isolation valves on all circuits.

A cover for these panels is not available.

Multiple low temp circuits mean multiple supply water temperatures for different radiant areas. A common example of this is in combination radiant heating systems where basements have a “wet” installation and DryAbove™ or DryBelow™ systems are installed on upper floors.

Add secondary zoning with a StatLink® module and manifold actuators (sold separately).

The flexibility of the TMP-Multi Panels means that this is the only panel you need for your residential or small commercial heating projects.

For complete specifications, see submittal [SUBTMPMulti](#).

Control Options

A. Wired Thermostat Connection

B. Wireless Thermostat Connection

- Wireless Internet Gateway #43301 required (sold separately).

Primary Pump Options

A. No pump

- For boilers with their own pump.

B. UPS 15-58

- For low flow rate and head loss.
- 100MBH max. output.

C. UPS 26-99

- For moderate flow rate and head loss.
- 300MBH max. output.

D. UPS 26-150

- For high flow rate and head loss.
- 300MBH max. output.

Circuit Options

A. DHW Circuit

- One (1) possible circuit for indirect fired hot water heater with priority.
- 100MBH max. output.
- Small (15-58) or large (26-99) pump.

B. High Temp Circuit

- Up to two (2) circuits for baseboards, fan coils, etc.
- 100MBH max. output.

C. Low Temp Circuit with Small TMV

- Up to five (5) for radiant heating areas.
- 40MBH max. output.

D. Low Temp Circuit with Large TMV

- Up to five (5) for radiant heating areas with higher head loss.
- 70MBH max. output.

Low Temp Circuit sequence of operation:

- A heat demand from the room thermostat will send a heating demand to the Control.
- The Control will turn on the Primary pump (if applicable), Circuit pump, and close the auxiliary contacts.
- As the pump moves fluid through the circuit the thermostatic mixing valve adjusts the fluid temperature based on the user settings.
- When the heat demand is removed, the Circuit pump will stop. If the Circuit is the only one that had a heat demand, the Control will stop the Primary pump and open the auxiliary contacts.

High Temp Circuit sequence of operation:

- A heat demand from the room thermostat will send a heating demand to the Control.
- The Control will turn on the Primary pump (if applicable), Circuit pump, and close the auxiliary contacts.
- When the heat demand is removed, the Circuit pump will stop. If the Circuit is the only one that had a heat demand, the Control will stop the Primary pump and open the auxiliary contacts.

DHW Circuit sequence of operation:


- A demand from the DHW aquastat will send a DHW demand to the Control.
- The Control will turn on the Primary pump (if applicable), Circuit pump, and close the auxiliary contacts.
- The Control will turn off all the other Circuit pump(s) (if running).
- When the DHW demand is removed, the Circuit pump will stop. If the Purge DIP switch is in the On position (default is Off), the Circuit pump will run for 2 minutes. If other circuits are calling for heat, their Circuit pumps will be turned on and the Primary pump will continue to run.

Panel Components

- ① Primary Pump
- ② Circuit Pump
- ③ 3-Way Thermostatic Mixing Valve (Large)
- ④ 3-Way Thermostatic Mixing Valve (Small)
- ⑤ Control with 120Vac 6' Power Cord
 - Priority Function
 - Exercise Function
 - Purge Function
 - Auxiliary Dry Contacts for Heat Source
- ⑥ Thermometer
- ⑦ Isolation Valve

TMP-MP2DHSS

DHW circuit with priority, one high temp circuit (e.g. fan coil), two low temp circuits (e.g. one for "wet" basement and one for "dry" main floor), and UPS 26-99 primary pump, shown with left feed.

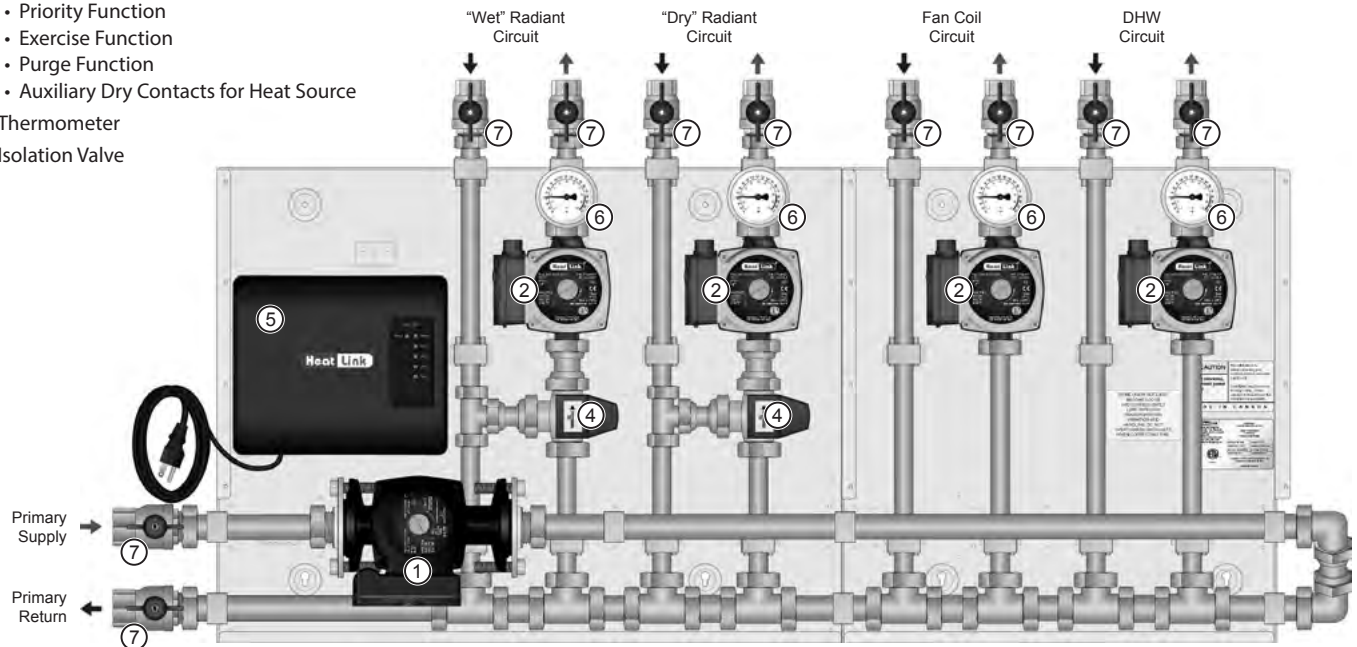

Common example configurations are listed below.

Please contact your local representative for pricing of other configurations or sizing assistance.

Stk#	Thermostat		Primary Pump			Secondary Circuits					Pkg Qty	Unit	List Price / Unit
	Wired	Wireless	None	15-58	26-99	26-150	DHW Small	DHW Large	High Temp	Low Temp Small	Low Temp Large		
TMP-MW1P0DSS	•		•				•			2		1	ea. \$ 6,662.00
TMP-MW1P2DSS	•				•		•			2		1	ea. \$ 8,352.00
TMP-MW1P0DHSS	•		•				•		1	2		1	ea. \$ 7,777.00
TMP-MW1P2DHSS	•				•		•		1	2		1	ea. \$ 9,467.00

TWH 70 MBH Tankless Water Heater Mixing Panels with Optional DHW Priority Stk# TWH070P & TWH070XP

The TWH Tankless Water Heater Mixing Panel's primary application is as a single zone mixing device for tankless DHW heaters.

The TWH070XP has a UPS 26-99 primary pump and is designed for applications where there is an extremely high flow resistance in the heat source.

The panel is pre-wired to work with an optional DHW priority switch which is mounted outside the panel.


Sequence of operation:

- When a thermostat calls for heat, its internal 24V contacts close, the auxiliary terminals close, and both pumps turn on.
- As the pumps move fluid through the panel the thermostatic mixing valve adjusts the fluid temperature based on the user settings.
- When the requirements of the thermostat are met, the internal contacts of the thermostat open, the auxiliary contacts open, and the pumps stop.
- Both the primary and secondary pumps are activated once every 24 hours, for 15 minutes, to ensure that potable water in the piping is not stagnant.
- If the optional DHW priority flow switch is installed and the DHW flow is above the factory setting for this device, the primary pump stops and the auxiliary contacts open. When the DHW flow drops below the factory setting the panel resumes normal operation.

For complete specifications, see submittal [SUBTWH000P](#) and [SUBFLSWTCH](#).

Panel Components

- ① Primary Pump with Check Valve
- ② Secondary Pump
- ③ PLC (Programmable Logic Control)
 - 24hr Timer for Potable Application
 - Auxiliary Dry Contacts for Heat Source
- ④ 120Vac 6' Power Cord
- ⑤ 24Vac Plug-in Transformer
- ⑥ Terminal Strip
- ⑦ 3-Way Thermostatic Mixing Valve
- ⑧ Thermometer
- ☑ Panel Enclosure (not shown)

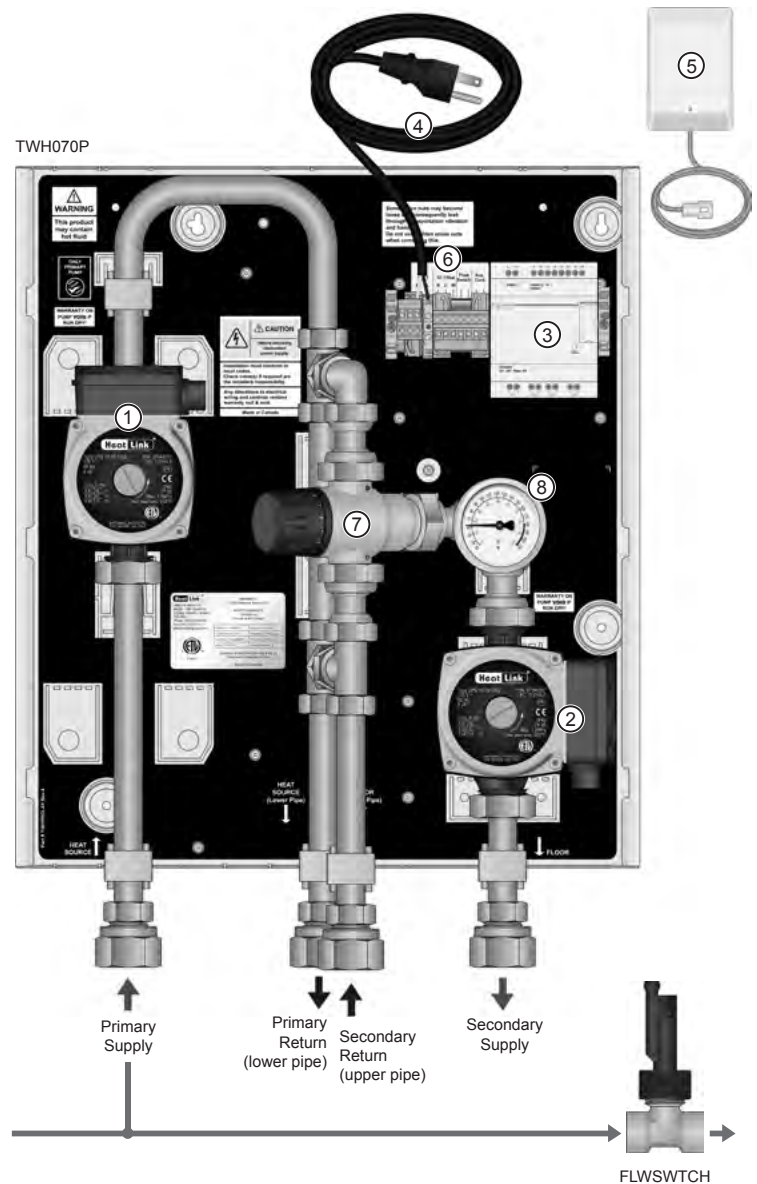

Stk#	Description	Pkg Qty	Unit	List Price / Unit
TWH070P	TWH 70MBH Tankless Water Heater Mixing Panel (DHW Priority Opt)	1	ea.	\$ 4,396.00
TWH070XP	TWH 70MBH HH Tankless Water Heater Mixing Panel (DHW Priority Opt)	1	ea.	\$ 6,322.00
FLSWTCH	Flow Switch for Domestic Hot Water Priority	1	ea.	\$ 296.79

**TWH 70 MBH Tankless Water Heater
Mixing Panels with Zoning**
Stk# TWH070Z & TWH070XPZ

The TWH Tankless Water Heater Mixing Panel's primary application is as a **multizone** mixing device for tankless DHW heaters.

The TWH070XPZ has a UPS 26-99 primary pump and is designed for applications where there is an extremely high flow resistance in the heat source.

The panel is pre-wired to work with an optional DHW priority switch which is mounted outside the panel.

Sequence of operation:


- When a thermostat calls for heat, its internal 24V contacts close, the auxiliary terminals close, both pumps turn on, and its corresponding zone actuator opens.
- As the pump moves fluid through the panel the thermostatic mixing valve adjusts the fluid temperature based on the user settings.
- When the requirements of the thermostat are met, the internal contacts of the thermostat open, and the corresponding zone actuator closes. If no other thermostats are calling for heat, the auxiliary contacts open, and the pumps stop.
- Both the primary and secondary pumps are activated, and all zone actuators open, once every 24 hours, for 15 minutes, to ensure that potable water in the piping is not stagnant.

For complete specifications, see submittal [SUBTWH000Z](#).

Panel Components

- ① Primary Pump with Check Valve
- ② Secondary Pump
- ③ PLC (Programmable Logic Control)
 - 24hr Timer for Potable Application
 - Auxiliary Dry Contacts for Heat Source
 - Thermostat Inputs and Actuator Outputs for 4 Zones
- ④ 120Vac 6' Power Cord
- ⑤ 24Vac Plug-in Transformer
- ⑥ Terminal Strip
- ⑦ 3-Way Thermostatic Mixing Valve
- ⑧ Thermometer
- ☑ Panel Enclosure (not shown)

TWH070Z

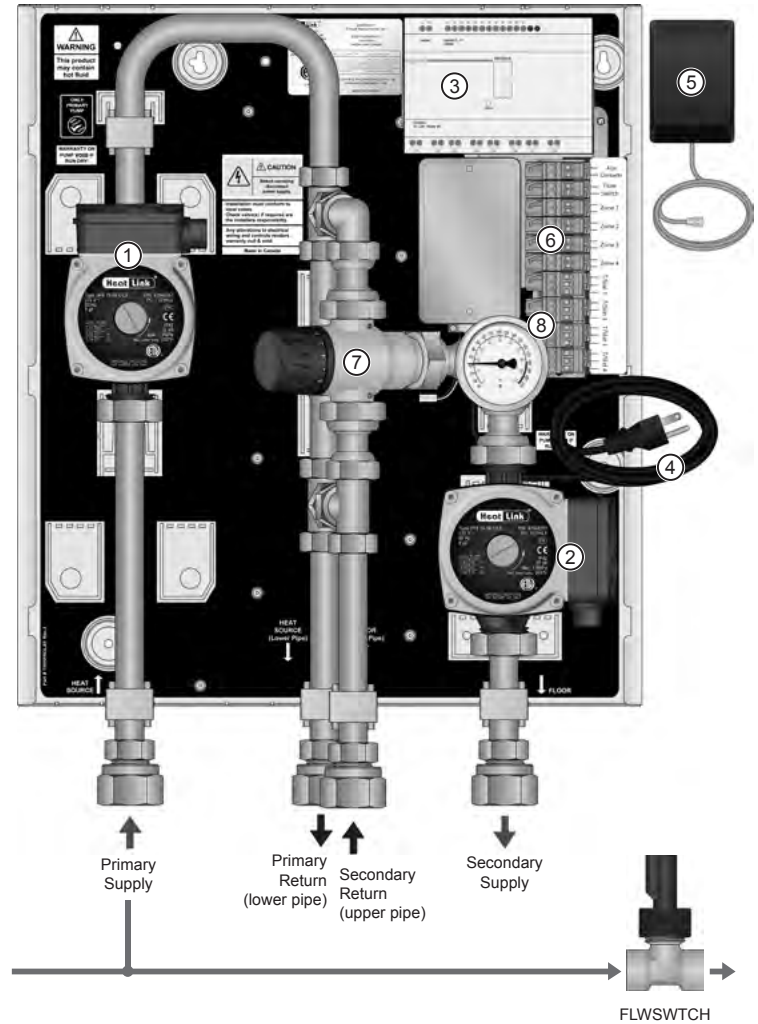

Stk#	Description	Pkg Qty	Unit	List Price / Unit
TWH070Z	TWH 70MBH Tankless Water Heater Mixing Panel with Zoning	1	ea.	\$ 4,996.00
TWH070XPZ	TWH 70MBH High Head Tankless Water Heater Mixing Panel with Zoning	1	ea.	\$ 7,021.00
FLWSWCH	Flow Switch for Domestic Hot Water Priority	1	ea.	\$ 296.79

HEP Isolation Heat Exchanger Panels HEP Series

The main application of the HEP Isolation Heat Exchanger Panel is to provide single wall isolation between a DHW tank and a heating system. This panel is *not* a temperature control device. The secondary water temperature is wholly dependent on the temperature of the primary supply water.

The panel is pre-wired to work with an optional DHW priority switch which is mounted outside the panel.



Sequence of operation:

- When a thermostat calls for heat, its internal 24V contacts close, the auxiliary terminals close, and both pumps turn on.
- When the requirements of the thermostat are met, the internal contacts of the thermostat open, the auxiliary contacts open, and the pumps stop.
- Both the primary and secondary pumps are activated once every 24 hours, for 15 minutes, to ensure that potable water in the piping is not stagnant.
- If the optional DHW priority flow switch is installed and the DHW flow is above the factory setting for this device, the primary pump stops and the auxiliary contacts open. When the DHW flow drops below the factory setting the panel resumes normal operation.

For complete specifications, see submittal [SUBHEP000P](#) and [SUBFLWSWITCH](#).

Panel Components

- ① Primary Pump
- ② Secondary Pump
- ③ Brazed Plate Heat Exchanger
- ④ PLC (Programmable Logic Control)
 - 24hr Timer for Potable Applications
- ⑤ 120Vac 6' Power Cord
- ⑥ 24Vac Plug-in Transformer
- ⑦ Pressure Relief Valve
- ⑧ Pressure Gauge
- ⑨ Automatic Air Vent
- ⑩ Drain and Fill Valve
- ☒ Panel Enclosure (not shown)

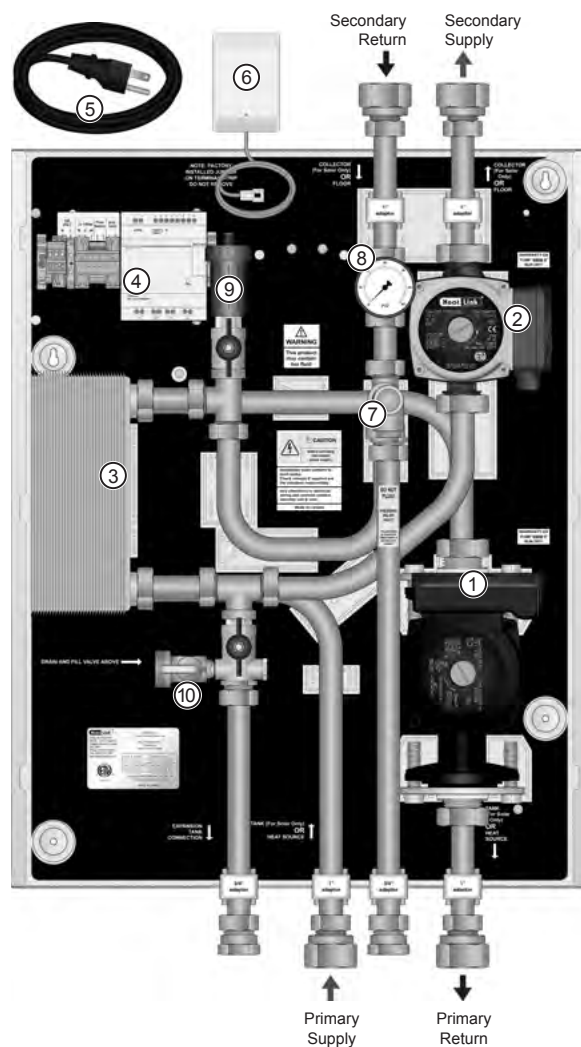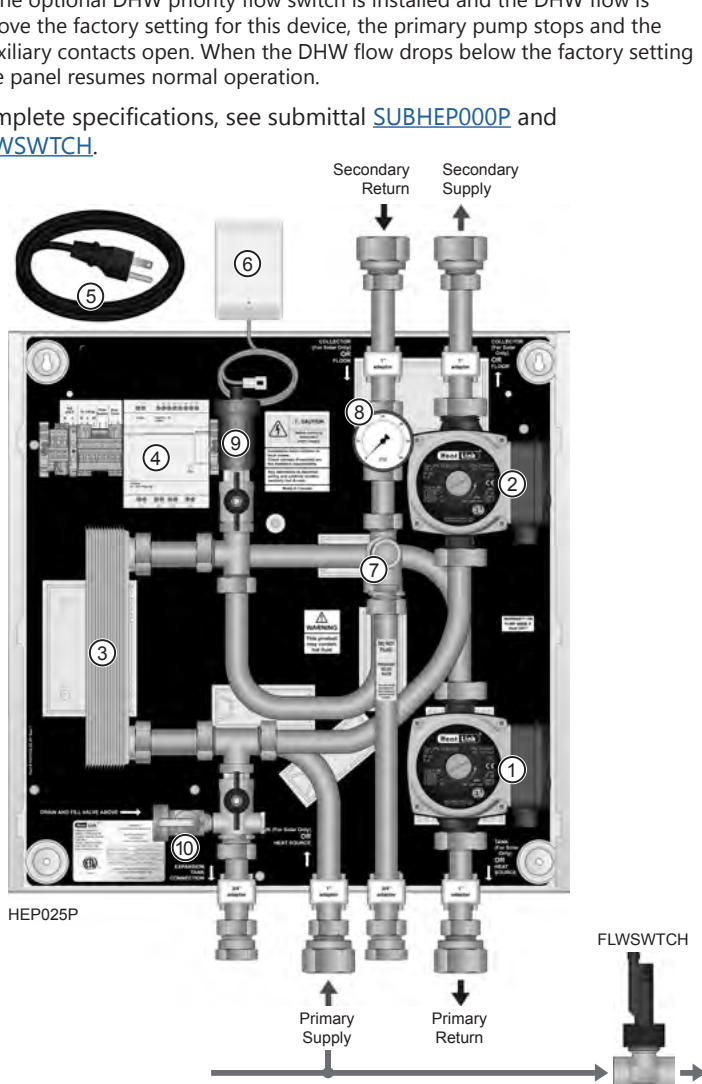

Stk#	Description	Pkg Qty	Unit	List Price / Unit
HEP025P	HEP 25MBH Isolation Heat Exchanger Panel	1	ea.	\$ 5,557.00
HEP080P	HEP 80MBH Isolation Heat Exchanger Panel	1	ea.	\$ 6,040.00
HEP095P	HEP 95MBH Isolation Heat Exchanger Panel	1	ea.	\$ 8,310.00
FLWSWITCH	Flow Switch for Domestic Hot Water Priority	1	ea.	\$ 296.79

HEP Isolation Heat Exchanger Panels w/ Relays HEP-R Series

The main application of the HEP Isolation Heat Exchanger Panel is to provide single wall isolation between a DHW tank and a heating system *where a 24hr timer is not required*. This panel is *not* a temperature control device; the secondary water temperature is dependent on the primary water temperature.

The panel is pre-wired to work with an optional DHW priority switch which is mounted outside the panel.

A cover for this panel is sold separately.


Sequence of operation:

- When a thermostat calls for heat, its internal 24V contacts close, the auxiliary terminals close, and both pumps turn on.
- When the requirements of the thermostat are met, the internal contacts of the thermostat open, the auxiliary contacts open, and the pumps stop.
- If the optional DHW priority flow switch is installed and the DHW flow is above the factory setting for this device, the primary pump stops and the auxiliary contacts open. When the DHW flow drops below the factory setting the panel resumes normal operation.

For complete specifications, see submittal [SUBHEP000R](#) and [SUBFLWSWITCH](#).

Panel Components

- ① Primary Pump
- ② Secondary Pump
- ③ Brazed Plate Heat Exchanger
- ④ Relay Box
- ⑤ 120Vac 6' Power Cord
- ⑥ 24Vac Plug-in Transformer
- ⑦ Pressure Relief Valve
- ⑧ Pressure Gauge
- ⑨ Automatic Air Vent
- ⑩ Drain and Fill Valve
- ⑪ Terminal Strip

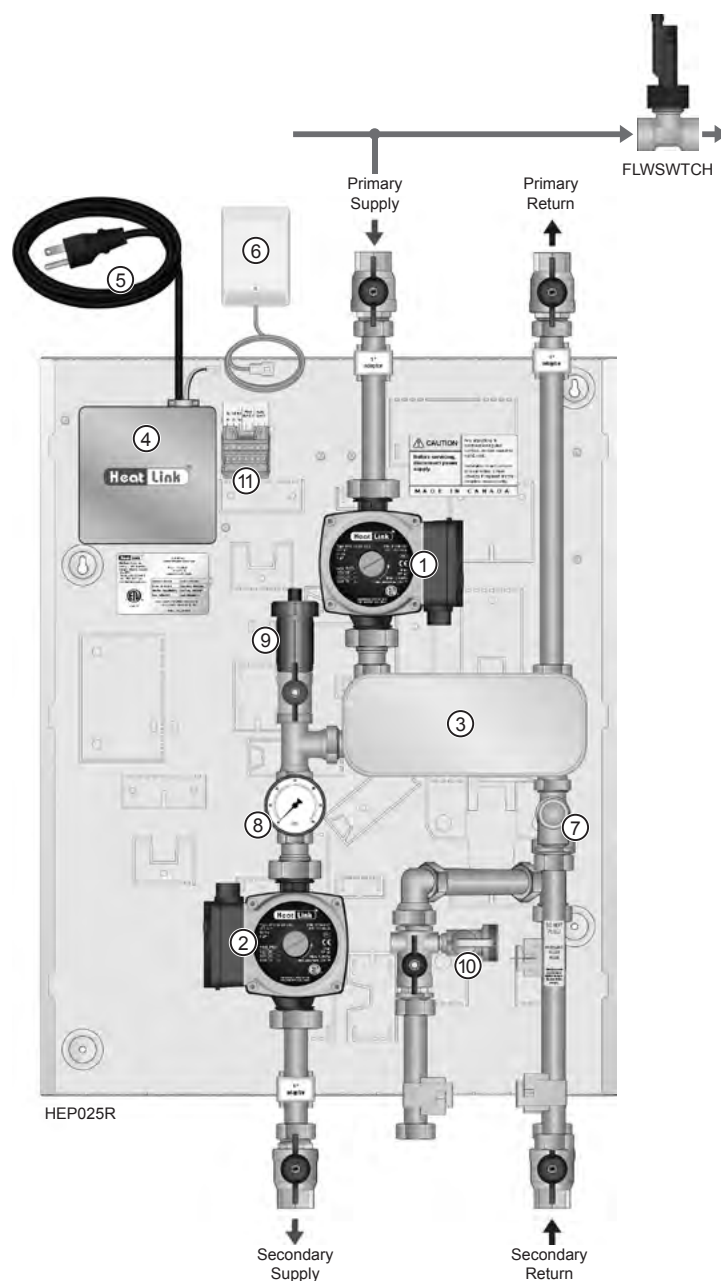

Stk#	Description	Pkg Qty	Unit	List Price / Unit
HEP025R	HEP 25MBH Isolation Heat Exchanger Panel Lite	1	ea.	\$ 4,058.00
PC2319CVR	Powder Coated Cover 23"x19" for HEP025/80R/T/DP,3WMIX,4WMIX	1	ea.	\$ 350.83
FLWSWITCH	Flow Switch for Domestic Hot Water Priority	1	ea.	\$ 296.79

HEP Isolation Heat Exchanger Panels w/ Relays and Timer HEP-RT Series

The main application of the HEP Isolation Heat Exchanger Panel with Timer is to provide single wall isolation between a DHW tank and a heating system *where a 24hr timer is required*. This panel is *not* a temperature control device; the secondary water temperature is dependent on the primary water temperature.

The dual pump models are 2-zone panels.

The panel is pre-wired to work with an optional DHW priority switch which is mounted outside the panel.

A cover for these panels is sold separately.


Sequence of operation:

- When a thermostat calls for heat, its internal 24V contacts close, the auxiliary terminals close, and both pumps turn on.
- When the requirements of the thermostat are met, the internal contacts of the thermostat open, the auxiliary contacts open, and the pumps stop.
- Both the primary and secondary pumps are activated once every 24 hours, for 15 minutes, to ensure that potable water in the piping is not stagnant.
- If the optional DHW priority flow switch is installed and the DHW flow is above the factory setting for this device, the primary pump stops and the auxiliary contacts open. When the DHW flow drops below the factory setting the panel resumes normal operation.

For complete specifications, see submittal [SUBHEP000RT](#) and [SUBFLWSWCH](#).

Panel Components

- ① Primary Pump
- ② Secondary Pump
- ③ Brazed Plate Heat Exchanger
- ④ Relay Box
- ⑤ 120Vac 6' Power Cord
- ⑥ 24Vac Plug-in Transformer
- ⑦ Pressure Relief Valve
- ⑧ Pressure Gauge
- ⑨ Automatic Air Vent
- ⑩ Drain and Fill Valve
- ⑪ Terminal Strip
- ⑫ 24hr Timer

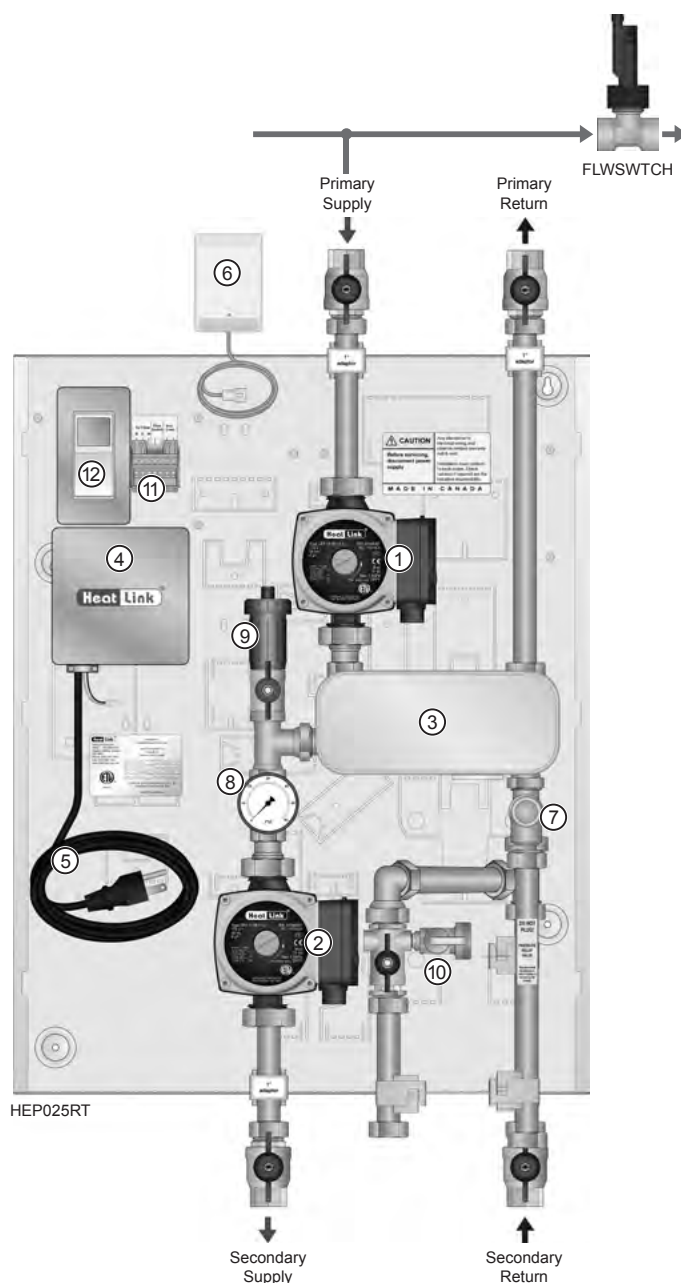

Stk#	Description	Pkg Qty	Unit	List Price / Unit
HEP025RT	HEP 25MBH Isolation Heat Exchanger Panel Lite w/Timer	1	ea.	\$ 4,271.00
HEP080RT	HEP 80MBH Isolation Heat Exchanger Panel Lite w/Timer	1	ea.	\$ 4,537.00
HEP025RTDP	HEP 25MBH Isolation Heat Exchange Panel Dual Pump w/Timer	1	ea.	\$ 5,263.00
HEP080RTDP	HEP 80MBH Isolation Heat Exchange Panel Dual Pump w/Timer	1	ea.	\$ 5,710.00
PC2319CVR	Powder Coated Cover 23"x19" for HEP025/80R/T/DP,3WMIX,4WMIX	1	ea.	\$ 350.83
FLWSWCH	Flow Switch for Domestic Hot Water Priority	1	ea.	\$ 296.79

Advantages

- Pre-engineered solutions reduce design and quotation time.
- Reliable (ETL listed, UL 508, CSA standard), exceeds highest quality standards, with multiple test procedures for electrical and mechanical system components.
- Eliminate on-site design and reduced risk of on-site errors.
- Known cost; fewer surprises.
- Reduced installation times; time is money!
- Trouble-free start-ups every time!
- Fewer call-backs.
- Compact and aesthetically pleasing.
- Easily serviced and replaceable.
- Covered by a single warranty.

Commercial Panel Selection

These panels are intended for use in commercial, industrial, or institutional buildings.

SSP Series Panels are distribution panels with their own pump to supply radiant areas that use the same supply water temperature. Typical applications include radiant heating in conjunction with a 3WMIX or 4WMIX mixing panel, radiant cooling, and snow melting.

SST Series Panels are distribution panels with their own pump and mixing valve to supply radiant areas that each need a different supply water temperature. Typical applications include radiant heating and snow melting.

3WMIX and 4WMIX Series Panels are mixing panels that control the radiant system supply water temperature.

To select the panel that will work best for your system installation use the tables and definitions below. For additional assistance contact our technical or product support team.

Pg#	Panel Stk#	Application			Space for Meter			Secondary Pump			Mixing/Diverting Valve				Heating Control				Heating Manifold
		Metering	Radiant	High Temp	DCW	DHW	BTU	UPS 15-58	UPS 26-99	UPS 26-150	3-way Cv=3.25	3-way Cv=7.3	3-way Cv=18.7	4-way Cv=18.7	StatLink®	Outdoor Reset	BMS Contacts	Snow Melt	
108	Metering Series	•	opt	opt	opt	opt	opt								opt				opt
110	SSPS Series		• ¹	• ¹				•							opt		opt		•
110	SSPL Series		• ¹	• ¹				•							opt		opt		•
112	SSTS Series		•					•			•				opt	opt	opt	opt	•
114	SSTL Series		•					•				•			opt	opt	opt	opt	•
118	3WMIX		•					•					•			•			
118	3WMIXHH		•						•				•			•			
118	3WMIX-BMS		•					•					•				•		
118	3WMIXHH-BMS		•						•				•				•		
119	4WMIX		•					•						•		•			
119	4WMIXHH		•						•					•		•			
119	4WMIX-BMS		•					•						•			•		
119	4WMIXHH-BMS		•						•					•			•		

Notes

1. Heating can be either Radiant or High Temp (e.g. baseboard).

Metering Panels

Many multi-unit buildings adopt a shared cost approach to utilities, simply because usage is metered for the entire building. Water and energy conservation is difficult when usage is unknown. Some unit owners may be paying more for what they use, and some owners may pay less.

The HeatLink Metering Panels enable developers to install hot and cold water (DHW & DCW) meters, and thermal (BTU) meters for each building unit. Each unit can then be charged and pay according to their actual water and energy usage.

There are several available models. Each panel can include:


- Recessed housing with coin/screwdriver locks.
- Stainless steel manifold for heating.
- Pre-wired 24Vac transformer.
- StatLink® Module.
- Space for DCW and DHW meters.
- Space for thermal meter.
- Isolation valves.
- Auto or manual flow balancing valve.
- Strainer.

With the addition of thermostats and actuators, the manifold provides an easy way to zone hydronic heating systems. Panels are shipped with spool pieces as placeholders for third party supplied water and thermal meters.


Please contact your local representative for a project quotation and technical specifications.

Panel Components


- ① StatLink® Module (optional)
- ② 24Vac Transformer
- ③ 120Vac Junction Box
- ④ Heating Supply Manifold
- ⑤ Heating Return Manifold
- ⑥ Auto Flow Balancing Valve
- ⑦ Y Strainer
- ⑧ Isolation Valve
- ⑨ Hot Water Meter (Not Included - Shown for reference only)
- ⑩ Cold Water Meter (Not Included - Shown for reference only)
- ⑪ BTU Meter (Not Included - Shown for reference only)
- ☑ Panel Cover (not shown)

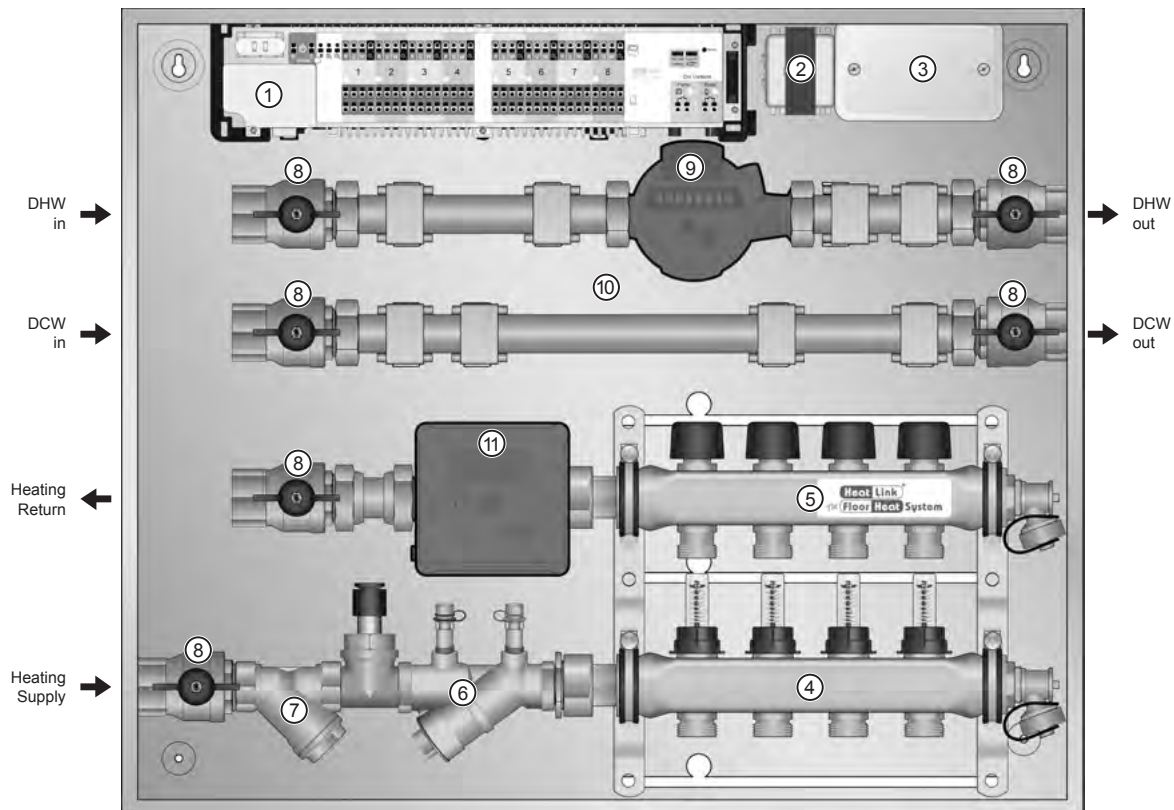


DHW, DCW, and BTU Metering with Manifold

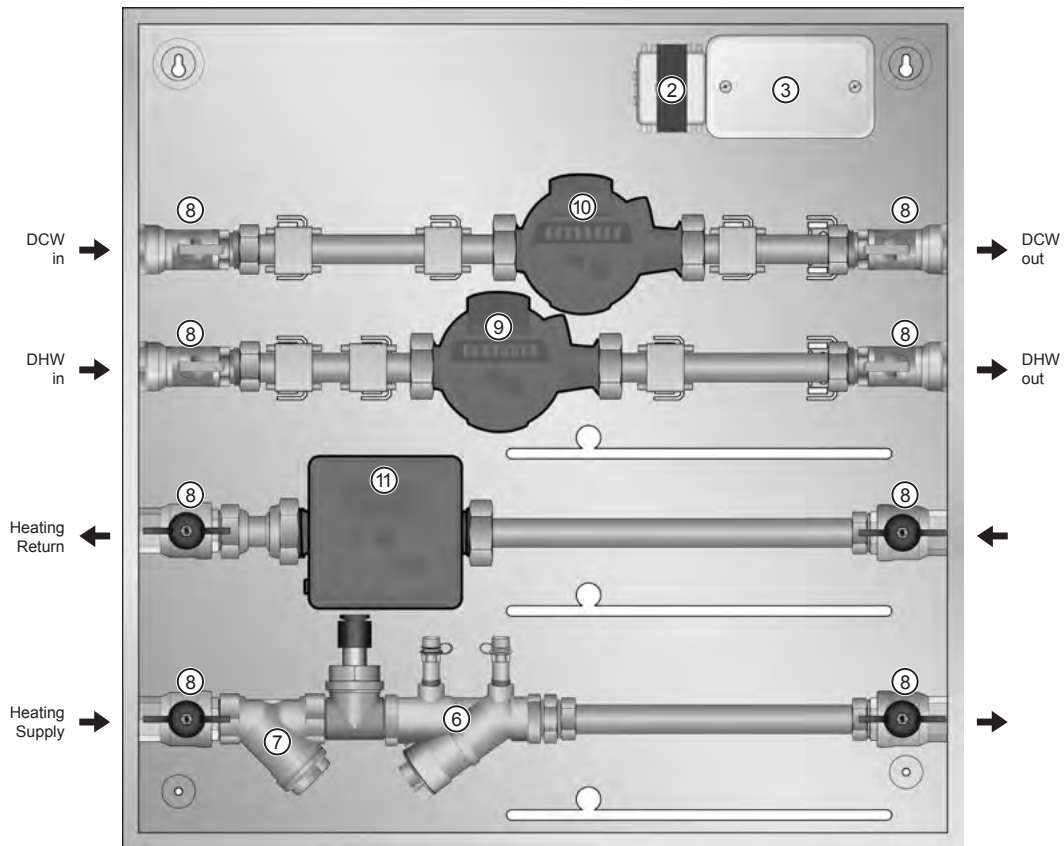


DHW, DCW, and BTU Metering

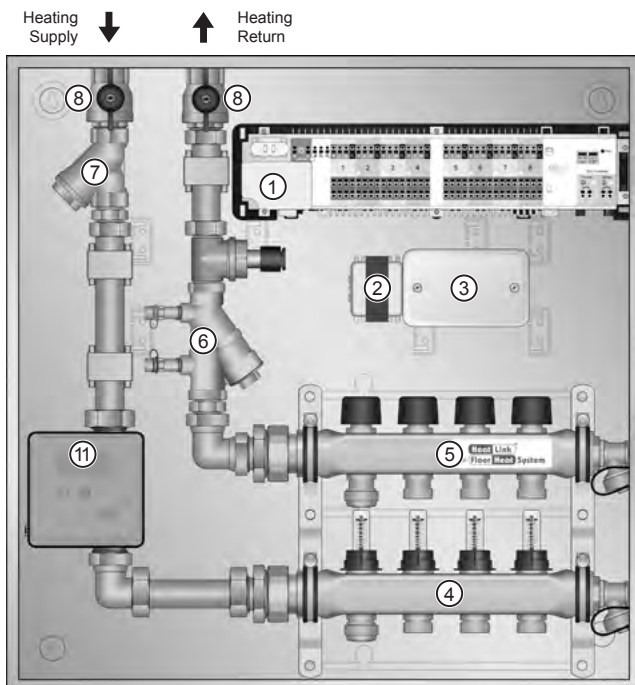

BTU Metering Top Feed Configuration

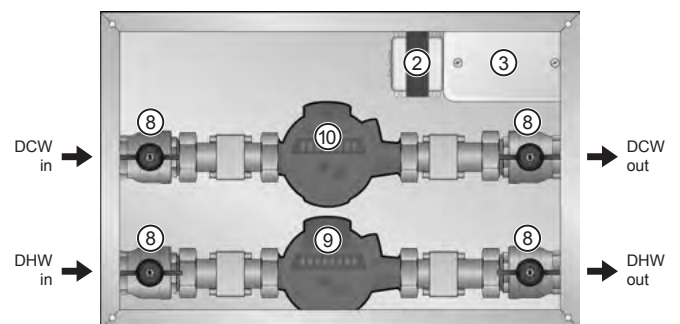

DHW and DCW Metering

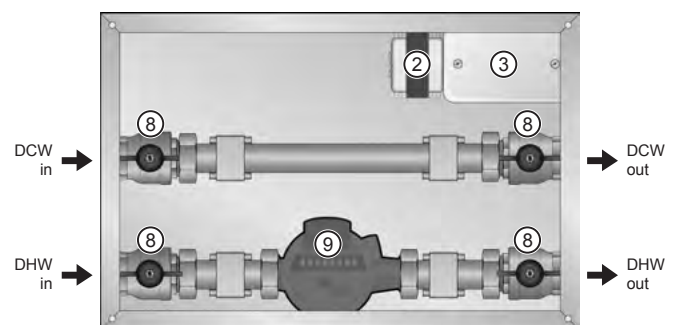

DHW Metering

SSP - Stainless Steel Manifold Pump Panels SSPxx000x Series

SSP Series Panels are distribution panels with their own pump to supply radiant areas that use the same supply water temperature. Typical applications include radiant heating in conjunction with a 3WMIX or 4WMIX mixing panel, radiant cooling, and snow melting.

The base SSP panel includes:

- Recessed or surface mount housing (skirting by others). Visible parts are made of satin coated steel that is ready to paint without priming. Recessed enclosure depth allows for mounting in a 2x6 wall.
- One key lock and one or two coin locks.
- 4, 6, 8, 10, or 12 loop 76100 series SS Manifold with Flow Meters or 76200 series High Flow SS Manifold. One loop is closed and plugged.
- Pre-wired UPS 15-58 or UPS 26-99 pump.
- Top or bottom mains feed available.
- Isolation valves.
- Thermometer.

One of the following control packages is required:

- StatLink® module (thermostats¹):
Add *SSASL*
- BMS (sensors by others):
Add *SSABMS*

Optional factory installed manifold add-ons:

- Pressure activated bypass² (#76937):
Add *SSAPB*.
- Side mount automatic air vent² (#76935):
Add *SSAAV*.
- Actuator with LED (#56201) installed on manifold and wired to StatLink® module (SSASL required):
Add *SSAACT* × # of loops; provide a zone summary.

Optional factory housing upgrades:

- Upgrade surface mount housing material to stainless steel:
Add *SSASSE6* (4/6 loops) or
Add *SSASSE10* (8/10 loops) or
Add *SSASSE12* (12 loops).
- Upgrade surface mount housing to extended housing:
Add *SSAEXE6* (4/6 loops) or
Add *SSAEXE10* (8/10 loops).


See [page 116](#) for control and add-on pricing.

For complete specifications, see submittal [SUBSSPxx000x](#).


1. Thermostats are sold separately.
2. Pressure activated bypass and side mount automatic air vent are not compatible and can't be used on the same panel.

Base Panel Components

- | | |
|--------------------|-------------------|
| ① Housing | ⑤ Return Manifold |
| ② Pump | ⑥ Hosebib |
| ③ Isolation Valves | ⑦ Thermometer |
| ④ Supply Manifold | |

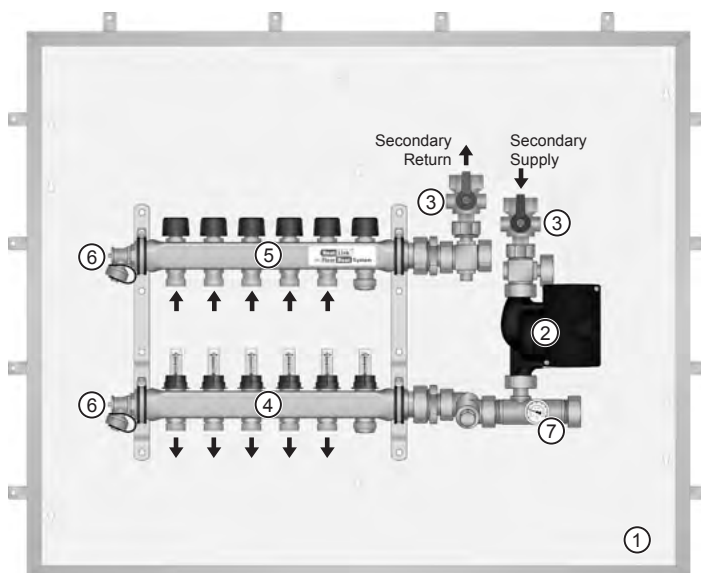

SSPSR106T
Recessed housing, 6 loop 76100 series SS Manifold with Flow Meters,
UPS 15-58 pump, top feed.

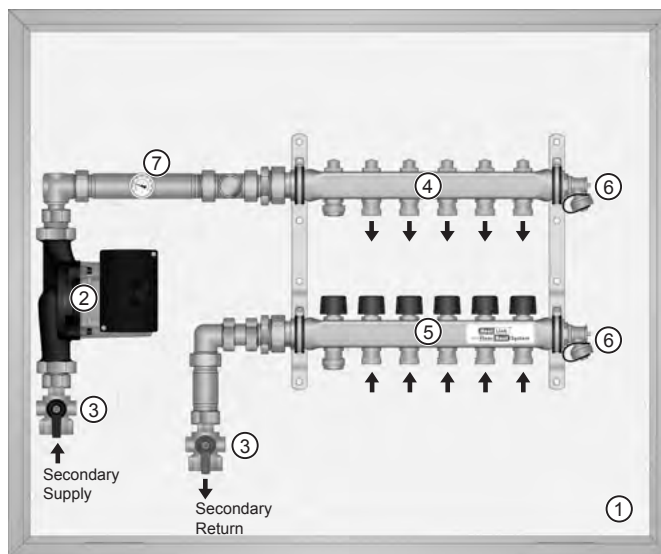

SSPLS206B
Surface mount housing, 6 loop 76200 series High Flow SS Manifold,
UPS 26-99 pump, bottom feed.

Pricing is for base SSP panel only. One control selection is required. See [page 116](#) for control and add-on pricing.

Stk#	Description	Qty	Unit	List Price / Unit
SSPSR104B	SSP Recessed 4 Loop 1-1/4" SS Manifold Small Pump Panel Bot. Feed	1	ea.	\$ 4,251.00
SSPSR104T	SSP Recessed 4 Loop 1-1/4" SS Manifold Small Pump Panel Top Feed	1	ea.	\$ 4,251.00
SSPSR106B	SSP Recessed 6 Loop 1-1/4" SS Manifold Small Pump Panel Bot. Feed	1	ea.	\$ 4,420.00
SSPSR106T	SSP Recessed 6 Loop 1-1/4" SS Manifold Small Pump Panel Top Feed	1	ea.	\$ 4,420.00
SSPSR108B	SSP Recessed 8 Loop 1-1/4" SS Manifold Small Pump Panel Bot. Feed	1	ea.	\$ 4,910.00
SSPSR108T	SSP Recessed 8 Loop 1-1/4" SS Manifold Small Pump Panel Top Feed	1	ea.	\$ 4,910.00
SSPSR110B	SSP Recessed 10 Loop 1-1/4" SS Manifold Small Pump Panel Bot. Feed	1	ea.	\$ 5,151.00
SSPSR110T	SSP Recessed 10 Loop 1-1/4" SS Manifold Small Pump Panel Top Feed	1	ea.	\$ 5,151.00
SSPSR112B	SSP Recessed 12 Loop 1-1/4" SS Manifold Small Pump Panel Bot. Feed	1	ea.	\$ 5,405.00
SSPSR112T	SSP Recessed 12 Loop 1-1/4" SS Manifold Small Pump Panel Top Feed	1	ea.	\$ 5,405.00
SSPSS104B	SSP SURF MNT 4 Loop 1-1/4" SS Man. Small Pump Panel Bot. Feed	1	ea.	\$ 4,251.00
SSPSS104T	SSP SURF MNT 4 Loop 1-1/4" SS Man. Small Pump Panel Top Feed	1	ea.	\$ 4,251.00
SSPSS106B	SSP SURF MNT 6 Loop 1-1/4" SS Man. Small Pump Panel Bot. Feed	1	ea.	\$ 4,420.00
SSPSS106T	SSP SURF MNT 6 Loop 1-1/4" SS Man. Small Pump Panel Top Feed	1	ea.	\$ 4,420.00
SSPSS108B	SSP SURF MNT 8 Loop 1-1/4" SS Man. Small Pump Panel Bot. Feed	1	ea.	\$ 4,910.00
SSPSS108T	SSP SURF MNT 8 Loop 1-1/4" SS Man. Small Pump Panel Top Feed	1	ea.	\$ 4,910.00
SSPSS110B	SSP SURF MNT 10 Loop 1-1/4" SS Man. Small Pump Panel Bot. Feed	1	ea.	\$ 5,151.00
SSPSS110T	SSP SURF MNT 10 Loop 1-1/4" SS Man. Small Pump Panel Top Feed	1	ea.	\$ 5,151.00
SSPSS112B	SSP SURF MNT 12 Loop 1-1/4" SS Man. Small Pump Panel Bot. Feed	1	ea.	\$ 5,405.00
SSPSS112T	SSP SURF MNT 12 Loop 1-1/4" SS Man. Small Pump Panel Top Feed	1	ea.	\$ 5,405.00
SSPLR104B	SSP Recessed 4 Loop 1-1/4" SS Man. Large Pump Panel Bot. feed	1	ea.	\$ 5,080.00
SSPLR104T	SSP Recessed 4 Loop 1-1/4" SS Man. Large Pump Panel Top feed	1	ea.	\$ 5,080.00
SSPLR106B	SSP Recessed 6 Loop 1-1/4" SS Man. Large Pump Panel Bot. Feed	1	ea.	\$ 5,251.00
SSPLR106T	SSP Recessed 6 Loop 1-1/4" SS Man. Large Pump Panel Top Feed	1	ea.	\$ 5,251.00
SSPLR108B	SSP Recessed 8 Loop 1-1/4" SS Man. Large Pump Panel Bot. Feed	1	ea.	\$ 5,743.00
SSPLR108T	SSP Recessed 8 Loop 1-1/4" SS Man. Large Pump Panel Top Feed	1	ea.	\$ 5,743.00
SSPLR110B	SSP Recessed 10 Loop 1-1/4" SS Man. Large Pump Panel Bot. Feed	1	ea.	\$ 5,981.00
SSPLR110T	SSP Recessed 10 Loop 1-1/4" SS Man. Large Pump Panel Top Feed	1	ea.	\$ 5,981.00
SSPLR112B	SSP Recessed 12 Loop 1-1/4" SS Man. Large Pump Panel Bot. Feed	1	ea.	\$ 6,235.00
SSPLR112T	SSP Recessed 12 Loop 1-1/4" SS Man. Large Pump Panel Top Feed	1	ea.	\$ 6,235.00
SSPLS104B	SSP SURF MNT 4 Loop 1-1/4" SS Man. Large Pump Panel Bot. Feed	1	ea.	\$ 5,080.00
SSPLS104T	SSP SURF MNT 4 Loop 1-1/4" SS Man. Large Pump Panel Top Feed	1	ea.	\$ 5,080.00
SSPLS106B	SSP SURF MNT 6 Loop 1-1/4" SS Man. Large Pump Panel Bot. Feed	1	ea.	\$ 5,251.00
SSPLS106T	SSP SURF MNT 6 Loop 1-1/4" SS Man. Large Pump Panel Top Feed	1	ea.	\$ 5,251.00
SSPLS108B	SSP SURF MNT 8 Loop 1-1/4" SS Man. Large Pump Panel Bot. Feed	1	ea.	\$ 5,743.00
SSPLS108T	SSP SURF MNT 8 Loop 1-1/4" SS Man. Large Pump Panel Top Feed	1	ea.	\$ 5,743.00
SSPLS110B	SSP SURF MNT 10 Loop 1-1/4" SS Man. Large Pump Panel Bot. Feed	1	ea.	\$ 5,981.00
SSPLS110T	SSP SURF MNT 10 Loop 1-1/4" SS Man. Large Pump Panel Top Feed	1	ea.	\$ 5,981.00
SSPLS112B	SSP SURF MNT 12 Loop 1-1/4" SS Man. Large Pump Panel Bot. Feed	1	ea.	\$ 6,235.00
SSPLS112T	SSP SURF MNT 12 Loop 1-1/4" SS Man. Large Pump Panel Top Feed	1	ea.	\$ 6,235.00
SSPLS204B	SSP SURF MNT 4 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed	1	ea.	\$ 4,966.00
SSPLS204T	SSP SURF MNT 4 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed	1	ea.	\$ 4,966.00
SSPLS206B	SSP SURF MNT 6 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed	1	ea.	\$ 5,165.00
SSPLS206T	SSP SURF MNT 6 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed	1	ea.	\$ 5,165.00
SSPLS208B	SSP SURF MNT 8 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed	1	ea.	\$ 5,641.00
SSPLS208T	SSP SURF MNT 8 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed	1	ea.	\$ 5,641.00
SSPLS210B	SSP SURF MNT 10 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed	1	ea.	\$ 5,864.00
SSPLS210T	SSP SURF MNT 10 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed	1	ea.	\$ 5,864.00
SSPLS212B	SSP SURF MNT 12 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed	1	ea.	\$ 6,106.00
SSPLS212T	SSP SURF MNT 12 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed	1	ea.	\$ 6,106.00

SSTS - Stainless Steel Manifold Mixing Panels with Small Pump

SSTSx000x Series

SST Series Panels are distribution panels with their own pump and mixing valve to supply radiant areas that each need a different supply water temperature. Typical applications include radiant heating and snow melting.

The base SSTS panel includes:

- Recessed or surface mount housing (skirting by others). Visible parts are made of satin coated steel that is ready to paint without priming. Recessed enclosure depth allows for mounting in a 2x6 wall.
- One key lock and one or two coin locks.
- 4, 6, 8, 10, or 12 loop 76100 series SS Manifold with Flow Meters or 76200 series High Flow SS Manifold. One loop is closed and plugged.
- 3-way mixing valve.
- Pre-wired UPS 15-58 pump.
- Top or bottom mains feed available.
- Isolation valves.
- Thermometer.

One of the following control packages is required:

- StatLink® module (thermostats¹) with thermostatic head: Add *SSASL* and *SSATH*.
- StatLink® module (thermostats¹) with outdoor reset control: Add *SSASL*, *SSAMRC*, and *SSADDC*.
- BMS (sensors by others): Add *SSABMS* and *SSADDC*.
- Snow melt control² (#SMCP): Add *SSASM* and *SSADDC*.
- Snow melt control with BACnet³ (#31680): Add *SSASMBAC* and *SSADDC*.

Optional factory installed manifold add-ons:

- Pressure activated bypass⁴ (#76937): Add *SSAPB*.
- Side mount automatic air vent⁴ (#76935): Add *SSAAV*.
- Actuator with LED (#56201) installed on manifold and wired to StatLink® module (*SSASL* required): Add *SSAACT* x # of loops; provide a zone summary.

Optional factory housing upgrades:

- Upgrade surface mount housing material to stainless steel: Add *SSASSE6* (4/6 loops) or Add *SSASSE10* (8/10 loops) or Add *SSASSE12* (12 loops).
- Upgrade surface mount housing to extended housing: Add *SSAEXE6* (4/6 loops) or Add *SSAEXE10* (8/10 loops).


See [page 116](#) for control and add-on pricing.

For complete specifications, see submittal [SUBSSTxx000x](#).


1. Thermostats are sold separately.
2. Only available for 4 loop high flow manifold. Snow/Ice Detector DRVWSNS-SS sold separately.
3. Only available for 4 loop high flow manifold. Snow/Ice Detector 30090/91 sold separately.
4. Pressure activated bypass and side mount automatic air vent are not compatible and can't be used on the same panel.

Base Panel Components

- | | |
|----------------------|-------------------|
| ① Housing | ⑥ Return Manifold |
| ② Pump | ⑦ Hosebib |
| ③ 3-Way Mixing Valve | ⑧ Thermometer |
| ④ Isolation Valves | ⑨ Sensor Well |
| ⑤ Supply Manifold | |

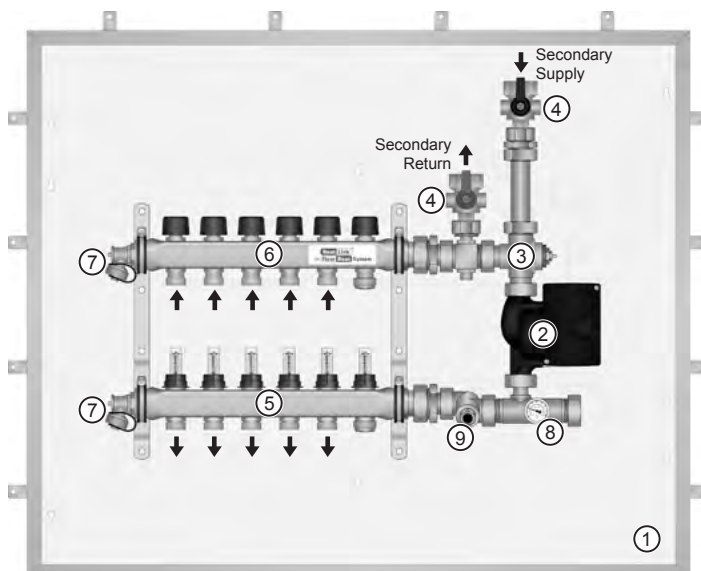

SSTSR106T
Recessed housing, 6 loop 76100 series SS Manifold with Flow Meters, UPS 15-58 pump, top feed.

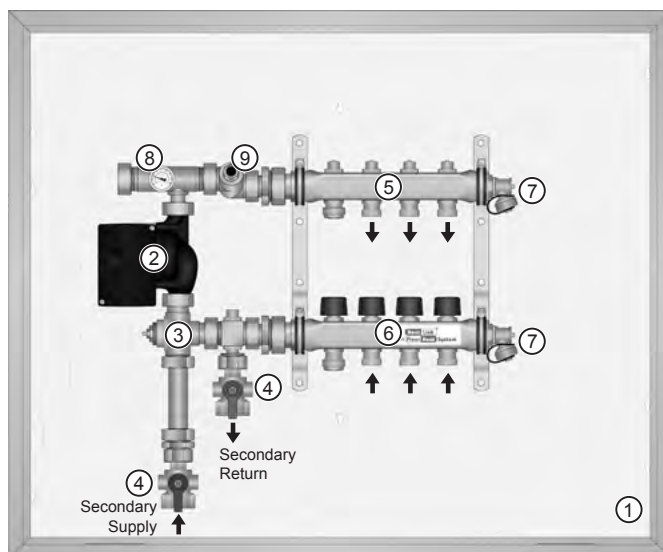

SSTSS204B
Surface mount housing, 4 loop 76200 series High Flow SS Manifold, UPS 15-58 pump, bottom feed.

Pricing is for base SSTS panel only. One control selection is required. See [page 116](#) for control and add-on pricing.

Stk#	Description	Qty	Unit	List Price / Unit
SSTSR104B	SST Recessed 4 Loop 1-1/4" SS Manifold Small Mixing Panel Bottom Feed	1	ea.	\$ 4,722.00
SSTSR104T	SST Recessed 4 Loop 1-1/4" SS Manifold Small Mixing Panel Top Feed	1	ea.	\$ 4,722.00
SSTSR106B	SST Recessed 6 Loop 1-1/4" SS Manifold Small Mixing Panel Bottom Feed	1	ea.	\$ 4,891.00
SSTSR106T	SST Recessed 6 Loop 1-1/4" SS Manifold Small Mixing Panel Top Feed	1	ea.	\$ 4,891.00
SSTSR108B	SST Recessed 8 Loop 1-1/4" SS Manifold Small Mixing Panel Bottom Feed	1	ea.	\$ 5,384.00
SSTSR108T	SST Recessed 8 Loop 1-1/4" SS Manifold Small Mixing Panel Top Feed	1	ea.	\$ 5,384.00
SSTSR110B	SST Recessed 10 Loop 1-1/4" SS Manifold Small Mixing Panel Bottom Feed	1	ea.	\$ 5,624.00
SSTSR110T	SST Recessed 10 Loop 1-1/4" SS Manifold Small Mixing Panel Top Feed	1	ea.	\$ 5,624.00
SSTSR112B	SST Recessed 12 Loop 1-1/4" SS Manifold Small Mixing Panel Bottom Feed	1	ea.	\$ 5,876.00
SSTSR112T	SST Recessed 12 Loop 1-1/4" SS Manifold Small Mixing Panel Top Feed	1	ea.	\$ 5,876.00
SSTSR204B	SST Recessed 4 Loop 1-1/4" High Flow SS Manifold Small Mixing Panel Bot. Feed	1	ea.	\$ 4,869.00
SSTSR204T	SST Recessed 4 Loop 1-1/4" High Flow SS Manifold Small Mixing Panel Top Feed	1	ea.	\$ 4,869.00
SSTSS104B	SST SURF MNT 4 Loop 1-1/4" SS Man. Small Mixing Panel Bot. Feed	1	ea.	\$ 4,722.00
SSTSS104T	SST SURF MNT 4 Loop 1-1/4" SS Man. Small Mixing Panel Top Feed	1	ea.	\$ 4,722.00
SSTSS106B	SST SURF MNT 6 Loop 1-1/4" SS Man. Small Mixing Panel Bot. Feed	1	ea.	\$ 4,891.00
SSTSS106T	SST SURF MNT 6 Loop 1-1/4" SS Man. Small Mixing Panel Top Feed	1	ea.	\$ 4,891.00
SSTSS108B	SST SURF MNT 8 Loop 1-1/4" SS Man. Small Mixing Panel Bot. Feed	1	ea.	\$ 5,384.00
SSTSS108T	SST SURF MNT 8 Loop 1-1/4" SS Man. Small Mixing Panel Top Feed	1	ea.	\$ 5,384.00
SSTSS110B	SST SURF MNT 10 Loop 1-1/4" SS Man. Small Mixing Panel Bot. Feed	1	ea.	\$ 5,624.00
SSTSS110T	SST SURF MNT 10 Loop 1-1/4" SS Man. Small Mixing Panel Top Feed	1	ea.	\$ 5,624.00
SSTSS112B	SST SURF MNT 12 Loop 1-1/4" SS Man. Small Mixing Panel Bot. Feed	1	ea.	\$ 5,876.00
SSTSS112T	SST SURF MNT 12 Loop 1-1/4" SS Man. Small Mixing Panel Top Feed	1	ea.	\$ 5,876.00
SSTSS204B	SST SURF MNT 4 Loop 1-1/4" High Flow SS Manifold Small Mixing Panel Bot. Feed	1	ea.	\$ 4,869.00
SSTSS204T	SST SURF MNT 4 Loop 1-1/4" High Flow SS Manifold Small Mixing Panel Top Feed	1	ea.	\$ 4,869.00

SSTL - Stainless Steel Manifold Mixing Panels with Large Pump SSTLx000x Series

SST Series Panels are distribution panels with their own pump and mixing valve to supply radiant areas that each need a different supply water temperature. Typical applications include radiant heating and snow melting.

The base SSTL panel includes:

- Recessed or surface mount housing (skirting by others). Visible parts are made of satin coated steel that is ready to paint without priming. Recessed enclosure depth allows for mounting in a 2×6 wall.
- One key lock and one or two coin locks.
- 4, 6, 8, 10, or 12 loop 76100 series SS Manifold with Flow Meters or 76200 series High Flow SS Manifold. One loop is closed and plugged.
- 3-way rotary diverting valve.
- Pre-wired UPS 26-99 pump.
- Top or bottom mains feed available.
- Isolation valves.
- Thermometer.

One of the following control packages is required:

- StatLink® module (thermostats¹) with outdoor reset control: Add *SSASL*, *SSAMRC*, and *SSAMXM*.
- BMS (sensors by others): Add *SSABMS* and *SSAMXMDDC*.
- Snow melt control² (#SMCP): Add *SSASM* and *SSAMXMDDC*.
- Snow melt control with BACnet³ (#31680): Add *SSASMBAC* and *SSAMXM*.

Optional factory installed manifold add-ons:

- Pressure activated bypass⁴ (#76937): Add *SSAPB*.
- Side mount automatic air vent⁴ (#76935): Add *SSAAV*.
- Actuator with LED (#56201) installed on manifold and wired to StatLink® module (*SSASL* required): Add *SSAACT* × # of loops; provide a zone summary.

Optional factory housing upgrades:

- Upgrade surface mount housing material to stainless steel: Add *SSASSE6* (4/6 loops) or Add *SSASSE10* (8/10 loops) or Add *SSASSE12* (12 loops).
- Upgrade surface mount housing to extended housing: Add *SSAEXE6* (4/6 loops) or Add *SSAEXE10* (8/10 loops).


See [page 116](#) for control and add-on pricing.

For complete specifications, see submittal [SUBSSTxx000x](#).


1. Thermostats are sold separately.
2. Snow/Ice Detector DRVWSNS-SS sold separately.
3. Snow/Ice Detector 30090/91 sold separately.
4. Pressure activated bypass and side mount automatic air vent are not compatible and can't be used on the same panel.

Base Panel Components

- | | |
|-------------------------|-------------------|
| ① Housing | ⑥ Return Manifold |
| ② Pump | ⑦ Hosebib |
| ③ 3-Way Diverting Valve | ⑧ Thermometer |
| ④ Isolation Valves | |
| ⑤ Supply Manifold | |

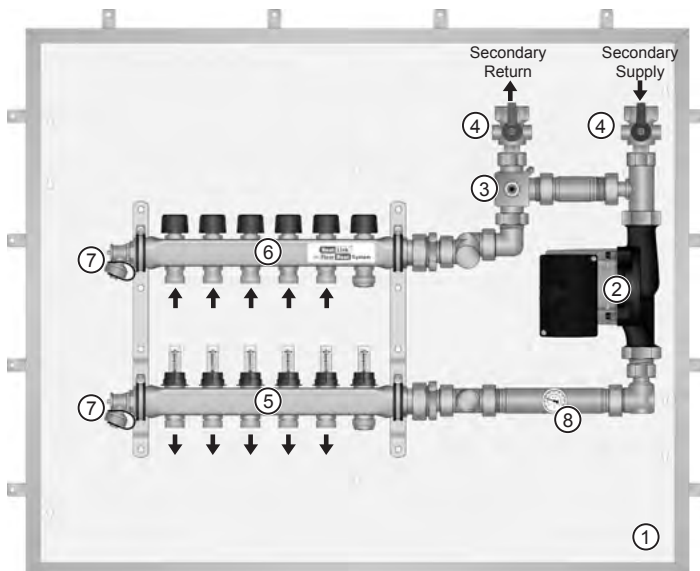

SSTLR106T
Recessed housing, 6 loop 76100 series SS Manifold with Flow Meters, UPS 26-99 pump, top feed.

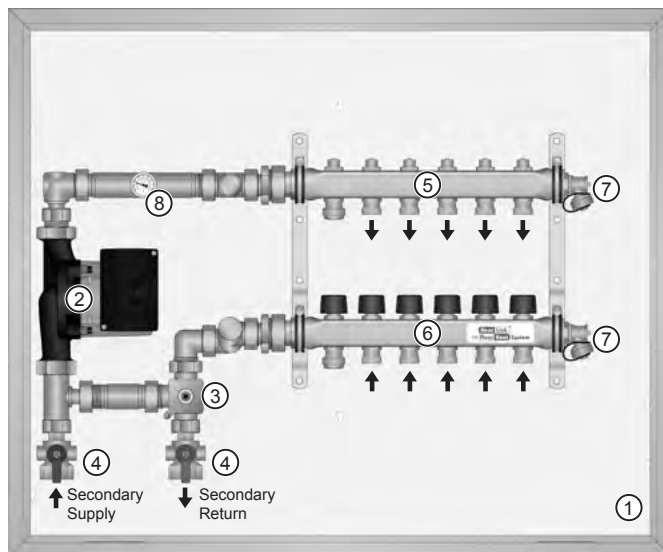

SSTLS206B
Surface mount housing, 6 loop 76200 series High Flow SS Manifold, UPS 26-99 pump, bottom feed.

Pricing is for base SSTL panels only. One control selection is required. See [page 116](#) for control and add-on pricing.

Stk#	Description	Qty	Unit	List Price / Unit
SSTLR104B	SST Recessed 4 Loop 1-1/4" SS Manifold Large Mixing Panel Bottom Feed	1	ea.	\$ 5,514.00
SSTLR104T	SST Recessed 4 Loop 1-1/4" SS Manifold Large Mixing Panel Top Feed	1	ea.	\$ 5,514.00
SSTLR106B	SST Recessed 6 Loop 1-1/4" SS Manifold Large Mixing Panel Bottom Feed	1	ea.	\$ 5,682.00
SSTLR106T	SST Recessed 6 Loop 1-1/4" SS Manifold Large Mixing Panel Top Feed	1	ea.	\$ 5,682.00
SSTLR108B	SST Recessed 8 Loop 1-1/4" SS Manifold Large Mixing Panel Bottom Feed	1	ea.	\$ 6,173.00
SSTLR108T	SST Recessed 8 Loop 1-1/4" SS Manifold Large Mixing Panel Top Feed	1	ea.	\$ 6,173.00
SSTLR110B	SST Recessed 10 Loop 1-1/4" SS Manifold Large Mixing Panel Bottom Feed	1	ea.	\$ 6,412.00
SSTLR110T	SST Recessed 10 Loop 1-1/4" SS Manifold Large Mixing Panel Top Feed	1	ea.	\$ 6,412.00
SSTLR112B	SST Recessed 12 Loop 1-1/4" SS Manifold Large Mixing Panel Bottom Feed	1	ea.	\$ 6,667.00
SSTLR112T	SST Recessed 12 Loop 1-1/4" SS Manifold Large Mixing Panel Top Feed	1	ea.	\$ 6,667.00
SSTLR204B	SST Recessed 4 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed	1	ea.	\$ 5,661.00
SSTLR204T	SST Recessed 4 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed	1	ea.	\$ 5,661.00
SSTLR206B	SST Recessed 6 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed	1	ea.	\$ 5,869.00
SSTLR206T	SST Recessed 6 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed	1	ea.	\$ 5,869.00
SSTLR208B	SST Recessed 8 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed	1	ea.	\$ 6,071.00
SSTLR208T	SST Recessed 8 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed	1	ea.	\$ 6,071.00
SSTLR210B	SST Recessed 10 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed	1	ea.	\$ 6,295.00
SSTLR210T	SST Recessed 10 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed	1	ea.	\$ 6,295.00
SSTLR212B	SST Recessed 12 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed	1	ea.	\$ 6,539.00
SSTLR212T	SST Recessed 12 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed	1	ea.	\$ 6,539.00
SSTLS104B	SST SURF MNT 4 Loop 1-1/4" SS Man. Large Mixing Panel Bot. Feed	1	ea.	\$ 5,514.00
SSTLS104T	SST SURF MNT 4 Loop 1-1/4" SS Man. Large Mixing Panel Top Feed	1	ea.	\$ 5,514.00
SSTLS106B	SST SURF MNT 6 Loop 1-1/4" SS Man. Large Mixing Panel Bot. Feed	1	ea.	\$ 5,682.00
SSTLS106T	SST SURF MNT 6 Loop 1-1/4" SS Man. Large Mixing Panel Top Feed	1	ea.	\$ 5,682.00
SSTLS108B	SST SURF MNT 8 Loop 1-1/4" SS Man. Large Mixing Panel Bot. Feed	1	ea.	\$ 6,173.00
SSTLS108T	SST SURF MNT 8 Loop 1-1/4" SS Man. Large Mixing Panel Top Feed	1	ea.	\$ 6,173.00
SSTLS110B	SST SURF MNT 10 Loop 1-1/4" SS Man. Large Mixing Panel Bot. Feed	1	ea.	\$ 6,412.00
SSTLS110T	SST SURF MNT 10 Loop 1-1/4" SS Man. Large Mixing Panel Top Feed	1	ea.	\$ 6,412.00
SSTLS112B	SST SURF MNT 12 Loop 1-1/4" SS Man. Large Mixing Panel Bot. Feed	1	ea.	\$ 6,667.00
SSTLS112T	SST SURF MNT 12 Loop 1-1/4" SS Man. Large Mixing Panel Top Feed	1	ea.	\$ 6,667.00
SSTLS204B	SST SURF MNT 4 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed	1	ea.	\$ 5,661.00
SSTLS204T	SST SURF MNT 4 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed	1	ea.	\$ 5,661.00
SSTLS206B	SST SURF MNT 6 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed	1	ea.	\$ 5,869.00
SSTLS206T	SST SURF MNT 6 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed	1	ea.	\$ 5,869.00
SSTLS208B	SST SURF MNT 8 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed	1	ea.	\$ 6,071.00
SSTLS208T	SST SURF MNT 8 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed	1	ea.	\$ 6,071.00
SSTLS210B	SST SURF MNT 10 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed	1	ea.	\$ 6,296.00
SSTLS210T	SST SURF MNT 10 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed	1	ea.	\$ 6,296.00
SSTLS212B	SST SURF MNT 12 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed	1	ea.	\$ 6,539.00
SSTLS212T	SST SURF MNT 12 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed	1	ea.	\$ 6,539.00

Pricing is for SSP and SST panel add-ons. See previous pages for base panel pricing.


SSP/SST Control Add-ons

Stk#	Description	Qty	Unit	List Price / Unit
SSABMS	Installed Wiring for BMS in SSP/SST Panel	1	ea.	\$ 246.00
SSADDC	Installed DDC Actuator 56121 on Mixing Valve in SST Panel	1	ea.	\$ 386.00
SSAMRC	Installed Outdoor Reset Control 31355 in SST Panel	1	ea.	\$ 1,298.00
SSAMXM	Installed Floating Action Mixing Valve Motor 58131 in SST Panel	1	ea.	\$ 1,271.00
SSAMXDDC	Installed DDC Mixing Valve Motor 58132 in SST Panel	1	ea.	\$ 1,382.00
SSASL	Installed StatLink® Module 40318 in SSP/SST Panel	1	ea.	\$ 694.00
SSASM	Installed Snow Melt Control SMCP in SST Panel (DRVWSNS-SS sold sep)	1	ea.	\$ 3,018.00
SSASMBAC	Installed Snow Melt Control 31680 in SST Panel (30090/91 sold sep)	1	ea.	\$ 11,524.00
SSATH	Installed Thermostatic Head 57094 on Mixing Valve in SST Panel	1	ea.	\$ 728.00

SSABMS



SSASL

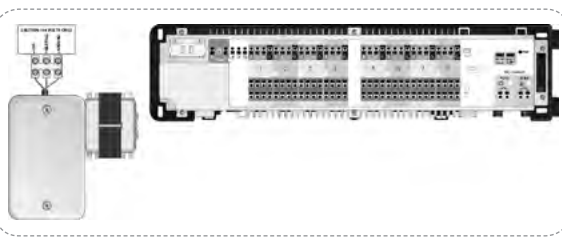

SSAMRC




SSATH




SSADDC



SSASM

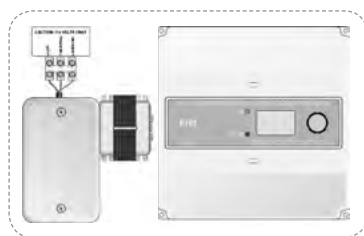

SSASMBAC

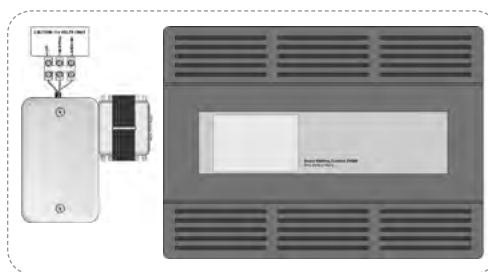

SSAMXM




SSAMXDDC



SSP/SST Manifold Add-ons

Stk#	Description	Qty	Unit	List Price / Unit
SSAACT	Actuator Mounted on Manifold and Wired to StatLink® in SSP/SST Panel	1	ea.	\$ 190.00
SSAAV	Installed Side Mount Auto Air Vent 76935 on Manifold in SSP/SST Panel	1	ea.	\$ 190.00
SSAPB	Installed Pressure Bypass 76937 on Manifold in SSP/SST Panel	1	ea.	\$ 775.00

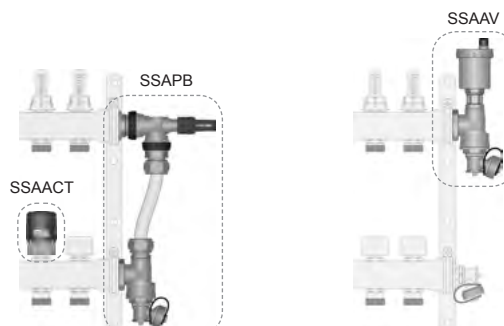

Pricing is for SSP and SST panel add-ons. See previous pages for base panel pricing.


SSP Piping Add-ons

Stk#	Description	Qty	Unit	List Price / Unit
SSACST	Installed Closely Spaced Tees in SSP Panel	1	ea.	\$ 238.00
SSAIZV	SSP Panel Auto Isolation Zone Valve	1	ea.	\$ 435.00

SSACST




SSAIZV

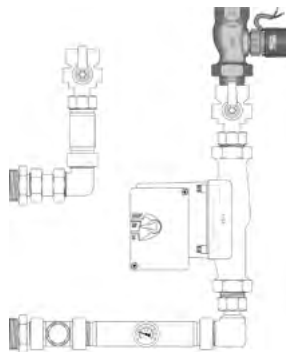

SSP/SST Housing Upgrades

Stk#	Description	Qty	Unit	List Price / Unit
SSASSE6	Upgrade SSP/SST Surface Mount Housing to Stainless Steel 4/6 Loop	1	ea.	\$ 3,023.00
SSASSE10	Upgrade SSP/SST Surface Mount Housing to Stainless Steel 8/10 Loop	1	ea.	\$ 3,141.00
SSASSE12	Upgrade SSP/SST Surface Mount Housing to Stainless Steel 12 Loop	1	ea.	\$ 3,568.00
SSAEXE6	Upgrade SSP/SST Surface Mount Housing to Extended 4/6 Loop	1	ea.	\$ 790.00
SSAEXE10	Upgrade SSP/SST Surface Mount Housing to Extended 8/10 Loop	1	ea.	\$ 979.00

SSAEXE10

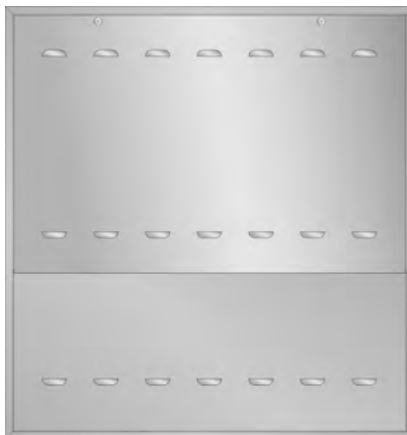

3WMIX 3-Way Mixing Panels

3WMIX Series

These standalone panels provide outdoor reset control with a secondary pump, 3-way rotary mixing valve, and 3-point floating mixing valve motor. BMS versions have no control and terminal strips for the pump and DDC mixing valve motor.

Sequence of operation (Outdoor Reset):

- When the panel receives a heat demand, the 31355 control is activated.
- If the control is not in Warm Weather Shut Down, the control operates the mixing valve, boiler, and pump to maintain an outdoor reset mix target temperature at the mix supply sensor.
- When the heat demand is removed, the control will close the mixing valve, open the boiler contacts, and stop the pump after the purge time.
- If the pump has not run in the past 3 days, the pump will run for 10 seconds.
- If the mixing valve has not operated its full stroke in the past 3 days, the control will operate the valve to the fully open position and then back to the fully closed position.


Sequence of operation (BMS):

- When the pump terminal block receives 120Vac power, the secondary pump will turn on and circulate the system water.
- The mixing valve motor will open or close the valve to adjust the supply water temperature according to input received at the mixing valve motor terminal block.

For complete specifications, see submittal [SUB3WMIX](#) or [SUB3WMIX-BMS](#).

Panel Components

- ① Secondary Pump
- ② 3-Way Mixing Valve and Motor
- ③ 120Vac Terminal Strip
- ④ 24Vac Terminal Strip
- ⑤ HeatLink® #31355 Compact Mixing Control
- ⑥ 24Vac Transformer
- ⑦ Relay/Electrical Box
- ⑧ Balancing Valve
- ⑨ Isolation Valves
- ⑩ Supply Sensor (in well)
- ⑪ Outdoor Sensor
- ⑫ Thermometer
- ☑ Panel Enclosure (not shown)

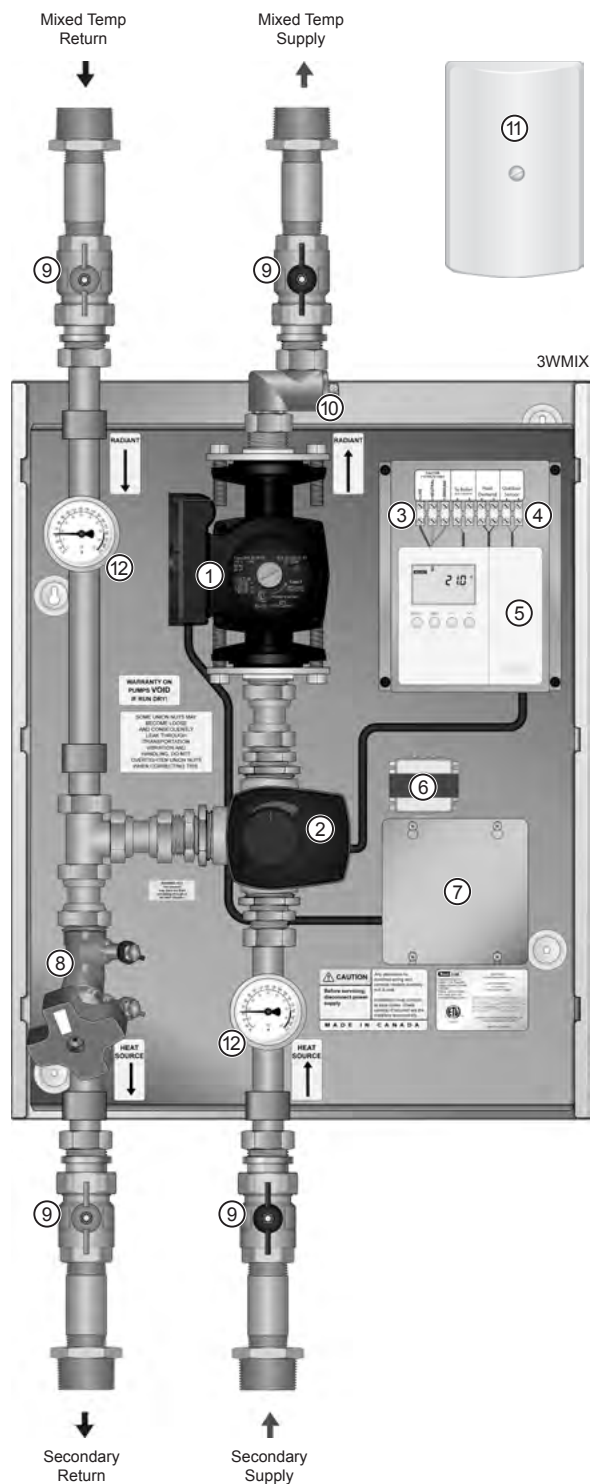

Stk#	Description	Pkg Qty	Unit	List Price / Unit
3WMIX	3-Way Mixing Panel 1-1/4" 26-99 Pump	1	ea.	\$ 8,525.00
3WMIXHH	3-Way Mixing Panel 1-1/4" 26-150 Pump	1	ea.	\$ 10,037.00
3WMIX-BMS	3-Way Mixing Panel 1-1/4" 26-99 Pump BMS	1	ea.	\$ 6,973.00
3WMIXHH-BMS	3-Way Mixing Panel 1-1/4" 26-150 Pump BMS	1	ea.	\$ 9,183.00

4WMIX 4-Way Mixing Panels 4WMIX Series

These standalone panels provide outdoor reset control with a secondary pump, 4-way rotary mixing valve, and 3-point floating mixing valve motor. BMS versions have no control and terminal strips for the pump and DDC mixing valve motor.

Sequence of operation (Outdoor Reset):

- When the panel receives a heat demand, the 31355 control is activated.
- If the control is not in Warm Weather Shut Down, the control operates the mixing valve, boiler, and pump to maintain an outdoor reset mix target temperature at the mix supply sensor.
- When the heat demand is removed, the control will close the mixing valve, open the boiler contacts, and stop the pump after the purge time.
- If the pump has not run in the past 3 days, the pump will run for 10 seconds.
- If the mixing valve has not operated its full stroke in the past 3 days, the control will operate the valve to the fully open position and then back to the fully closed position.


Sequence of operation (BMS):

- When the pump terminal block receives 120Vac power, the secondary pump will turn on and circulate the system water.
- The mixing valve motor will open or close the valve to adjust the supply water temperature according to input received at the mixing valve motor terminal block.

For complete specifications, see submittal [SUB4WMIX](#) or [SUB4WMIX-BMS](#).

Panel Components

- ① Secondary Pump
- ② 4-Way Mixing Valve and Motor
- ③ 120Vac Terminal Strip
- ④ 24Vac Terminal Strip
- ⑤ HeatLink® #31355 Compact Mixing Control
- ⑥ 24Vac Transformer
- ⑦ Relay/Electrical Box
- ⑧ Balancing Valve
- ⑨ Isolation Valves
- ⑩ Supply Sensor (in well)
- ⑪ Outdoor Sensor
- ⑫ Thermometer
- ☑ Panel Enclosure (not shown)

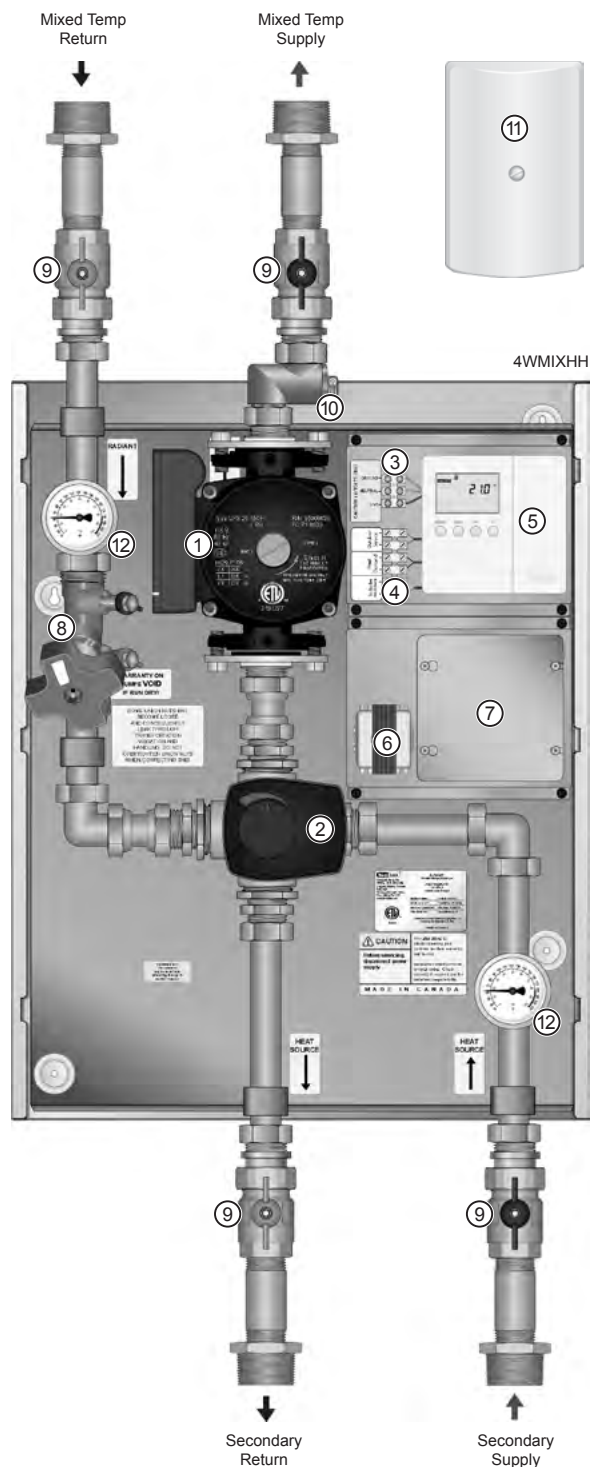

Stk#	Description	Pkg Qty	Unit	List Price / Unit
4WMIX	4-Way Mixing Panel 1-1/4" 26-99 Pump	1	ea.	\$ 8,525.00
4WMIX-BMS	4-Way Mixing Panel 1-1/4" 26-99 Pump BMS	1	ea.	\$ 6,973.00
4WMIXHH	4-Way Mixing Panel 1-1/4" 26-150 Pump	1	ea.	\$ 10,037.00
4WMIXHH-BMS	4-Way Mixing Panel 1-1/4" 26-150 Pump BMS	1	ea.	\$ 9,183.00

Advantages

- Pre-engineered solutions reduce design and quotation time.
- Reliable (ETL listed, UL 508, CSA standard), exceeds highest quality standards, with multiple test procedures for electrical and mechanical system components.
- Eliminate on-site design and reduced risk of on-site errors.
- Known cost; fewer surprises.
- Reduced installation times; time is money!
- Trouble-free start-ups every time!
- Fewer call-backs.
- Compact and aesthetically pleasing.
- Easily serviced and replaceable.
- Covered by a single warranty.

Snow Melt Panel Selection

These panels are intended for use in snow melt systems. All panels include the HeatLink® Snow Melt Control Package (#SMCP; [page 79](#)). Alternate controls or BMS versions are available. Snow/Ice Detector sold separately.

To select the panel that will work best for your system installation use the tables and definitions below. For additional assistance contact our technical or product support team.

Pg#	Panel Stk#	Nominal Output (MBH)	Heat Exchangers		Primary Pump	Secondary Pump			Mixing/Diverting Valve			BACnet Option
			3×8-20	3×8-30	UPS 26-99	UPS 26-99	UPS 26-150	UP 43-110	3-way Cv=11.7	3-way Cv=18.7	4-way Cv=18.7	
121	3WMIX-SMCP					•				•		
121	3WMIXHH-SMCP						•			•		
122	4WMIX-SMCP					•					•	
122	4WMIXHH-SMCP						•				•	
123	4WMIX-SMCP-BAC					•					•	•
123	4WMIX-HH-SMCP-BAC						•				•	•
124	SMP375SS	300			•	•			•			•
124	SMP375SSH	375			•		•		•			•
125	SMP175SS-HEX	175	2		•	•			•			•
125	SMP300SS-HEX	300		2	•	•			•			•
125	SMP300SS-HEX-H	365		3	•		•		•			•
126	SMP400D	400						•		•		•
127	SMP335	335	4					•		•		•
127	SMP425	425		4				•		•		•

3WMIX-SMCP 3-Way Mixing Panels w/ Snow Melt Control

3WMIX-SMCP Series

These Snow Melt Panels are operation centers for fully automatic snow melt systems. They can be used for snow melt systems with a dedicated heat source (e.g. a boiler or other non-DHW appliance), or a non-dedicated heat source with a heat exchanger.

Standard snow melt control uses Snow/Ice Detector #DRVWSNS-SS and Outdoor Temperature Sensor #ETF-1733/44/55 (both sold separately). See [page 128](#) for panel options & accessories.


Sequence of operation:

- When the temperature read by the Snow/Ice Detector is below warm weather shutdown setting, the Snow Melt Control will activate. It will start the Secondary Pump for 1 minute every 15 minutes to check the return water temperature. If the return water temperature is below the minimum return water temperature the Snow Melt Control will start the Secondary Pump, close the Auxiliary Terminals, and open the mixing valve to increase the return water temperature to the required level.
- When the Snow/Ice Detector senses snow fall, the Snow Melt Control will start the Secondary Pump, close the Auxiliary Terminals, and open the mixing valve to increase the flow temperature to the maximum supply water temperature. When no more snow is detected by the Snow/Ice Detector, the Snow Melt Control continues to operate the system for an additional user adjustable period of time.
- When the temperature read by the Snow/Ice Detector is below cold weather cutoff setting, the Snow Melt Control will be in standby mode.

For complete specifications, see submittal [SUB3WMIX-SMCP](#).

Panel Components

- ① Secondary Pump
- ② 3-Way Mixing Valve and Motor
- ③ Snow Melt Control
- ④ 24Vac Transformer
- ⑤ 120Vac 6' Power Cord
- ⑥ Balancing Valve
- ⑦ Isolation Valves
- ⑧ Supply Sensor (in well)
- ⑨ Return Sensor
- ⑩ Thermometer
- ☒ Panel Enclosure (not shown)

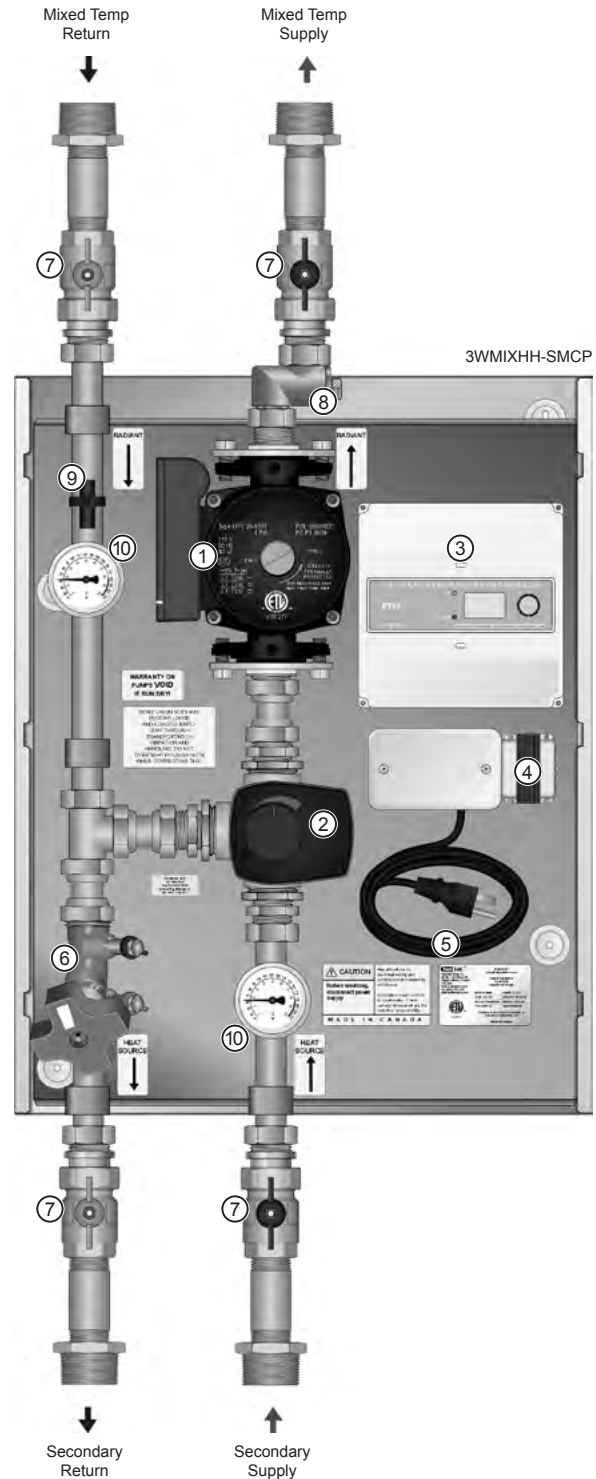

Stk#	Description	Pkg Qty	Unit	List Price / Unit
3WMIX-SMCP	3-Way Mixing Panel 1-1/4" 26-99 Pump Snow Melt	1	ea.	\$ 9,442.00
3WMIXHH-SMCP	3-Way Mixing Panel 1-1/4" 26-150 Pump Snow Melt	1	ea.	\$ 11,433.00

4WMIX-SMCP 4-Way Mixing Panels w/ Snow Melt Control 4WMIX-SMCP Series

These Snow Melt Panels are operation centers for fully automatic snow melt systems. They can be used for snow melt systems with a dedicated heat source (e.g. a boiler or other non-DHW appliance), or a non-dedicated heat source with a heat exchanger.

Standard snow melt control uses Snow/Ice Detector #DRVWSNS-SS and Outdoor Temperature Sensor #ETF-1733/44/55 (both sold separately). See [page 128](#) for panel options & accessories.


Sequence of operation:

- When the temperature read by the Snow/Ice Detector is below warm weather shutdown setting, the Snow Melt Control will activate. It will start the Secondary Pump for 1 minute every 15 minutes to check the return water temperature. If the return water temperature is below the minimum return water temperature the Snow Melt Control will start the Secondary Pump, close the Auxiliary Terminals, and open the mixing valve to increase the return water temperature to the required level.
- When the Snow/Ice Detector senses snow fall, the Snow Melt Control will start the Secondary Pump, close the Auxiliary Terminals, and open the mixing valve to increase the flow temperature to the maximum supply water temperature. When no more snow is detected by the Snow/Ice Detector, the Snow Melt Control continues to operate the system for an additional user adjustable period of time.
- When the temperature read by the Snow/Ice Detector is below cold weather cutoff setting, the Snow Melt Control will be in standby mode.

For complete specifications, see submittal [SUB4WMIX-SMCP](#).

Panel Components

- ① Secondary Pump
- ② 4-Way Mixing Valve and Motor
- ③ Snow Melt Control
- ④ 24Vac Transformer
- ⑤ 120Vac 6' Power Cord
- ⑥ Balancing Valve
- ⑦ Isolation Valves
- ⑧ Supply Sensor (in well)
- ⑨ Return Sensor
- ⑩ Thermometer
- ☑ Panel Enclosure (not shown)

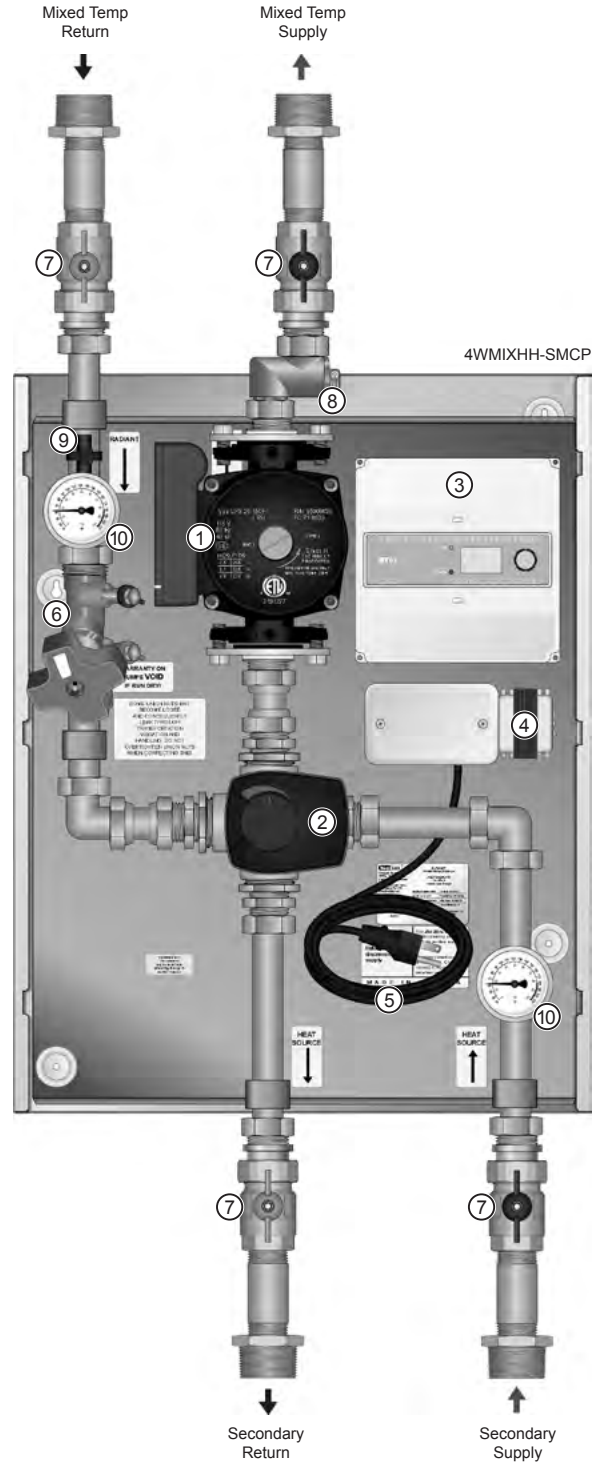

Stk#	Description	Pkg Qty	Unit	List Price / Unit
4WMIX-SMCP	4-Way Mixing Panel 1-1/4" 26-99 Pump Snow Melt	1	ea.	\$ 9,442.00
4WMIXHH-SMCP	4-Way Mixing Panel 1-1/4" 26-150 Pump Snow Melt	1	ea.	\$ 11,433.00

4WMIX-SMCP-BAC 4-Way Mixing Panels w/ BACnet Snow Melt Control 4WMIX-SMCP-BAC Series

These Snow Melt Panels are operation centers for fully automatic snow melt systems. They can be used for snow melt systems with a dedicated heat source (e.g. a boiler or other non-DHW appliance), or a non-dedicated heat source with a heat exchanger.

BACnet snow melt control uses Snow/Ice Detector #30090 (sold separately). See [page 128](#) for panel options & accessories.


Sequence of operation:

- When the temperature read by the Snow/Ice Detector is below warm weather shutdown setting, the Snow Melt Control will activate. It will start the Secondary Pump for 1 minute every 15 minutes to check the return water temperature. If the return water temperature is below the minimum return water temperature the Snow Melt Control will start the Secondary Pump, close the Auxiliary Terminals, and open the mixing valve to increase the return water temperature to the required level.
- When the Snow/Ice Detector senses snow fall, the Snow Melt Control will start the Secondary Pump, close the Auxiliary Terminals, and open the mixing valve to increase the flow temperature to the maximum supply water temperature. When no more snow is detected by the Snow/Ice Detector, the Snow Melt Control continues to operate the system for an additional user adjustable period of time.
- When the temperature read by the Snow/Ice Detector is below cold weather cutoff setting, the Snow Melt Control will be in standby mode.

For complete specifications, see submittal [SUB4WMIX-SMCP-BAC](#).

Panel Components

- ① Secondary Pump
- ② 4-Way Mixing Valve and Motor
- ③ Snow Melt Control
- ④ 24Vac Transformer
- ⑤ 120Vac 6' Power Cord
- ⑥ Balancing Valve
- ⑦ Isolation Valves
- ⑧ Supply Sensor
- ⑨ Return Sensor
- ⑩ Thermometer
- ☒ Panel Enclosure (not shown)

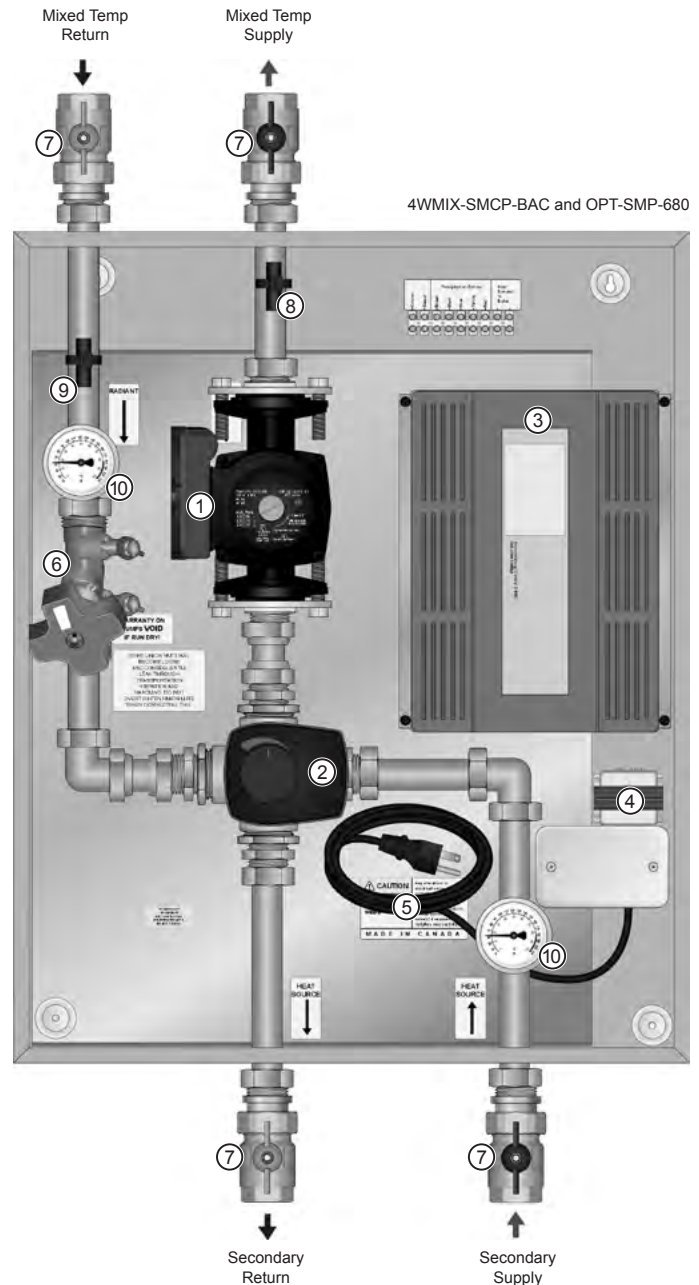

Stk#	Description	Pkg Qty	Unit	List Price / Unit
4WMIX-SMCP-BAC	4-Way Mixing Panel 1-1/4" 26-99 Pump Snow Melt (requires OPT-SMP-680)	1	ea.	\$ 10,573.00
4WMIX-HH-SMCP-BAC	4-Way Mixing Panel 1-1/4" 26-150 Pump Snow Melt (requires OPT-SMP-680)	1	ea.	\$ 12,294.00
OPT-SMP-680	Optional SMP Control Upgrade to BMS 680 BACnet (30090,30091 Sold Sep.)	1	ea.	\$ 5,767.00

Stainless Steel Snow Melt Panels SMP000SS Series

The Snow Melt Panels are central operations centers for fully automatic snow melt systems with a dedicated heat source (e.g. a boiler or other non-DHW appliance). Includes the primary and secondary pumps, snow melt control, mixing valve, mixing valve motor, transformer, thermometer, and isolation valves.

Standard snow melt control uses Snow/Ice Detector #DRVWSNS-SS and Outdoor Temperature Sensor #ETF-1733/44/55 (both sold separately). See [page 128](#) for panel options & accessories.

Sequence of operation:

- When the temperature read by the Snow/Ice Detector is below warm weather shutdown setting, the Snow Melt Control will activate. It will start the Primary and Secondary Pumps for 1 minute every 15 minutes to check the return water temperature.


If the return water temperature is below the minimum return water temperature the Snow Melt Control will start the Primary and Secondary Pumps, close the Auxiliary Terminals, and open the mixing valve to increase the return water temperature to the required level.

- When the Snow/Ice Detector senses snow fall, the Snow Melt Control will start the Primary and Secondary Pumps, close the Auxiliary Terminals, and open the mixing valve to increase the flow temperature to the maximum supply water temperature. When no more snow is detected by the Snow/Ice Detector, the Snow Melt Control continues to operate the system for an additional user adjustable period of time.
- When the temperature read by the Snow/Ice Detector is below cold weather cutoff setting, the Snow Melt Control will be in standby mode.

For complete specifications, see submittal [SUBSMP000SS](#).

Panel Components

- | | | | |
|---------------------|---------------------------------|-----------------|---|
| ① Primary Pump | ④ 24Vac Transformer | ⑦ Supply Sensor | ⑩ Isolation Valve |
| ② Secondary Pump | ⑤ 120Vac 6' Power Cord | ⑧ Return Sensor | ⑪ Drain and Fill Valve |
| ③ Snow Melt Control | ⑥ 3-Way Mixing Valve with Motor | ⑨ Thermometer | <input checked="" type="checkbox"/> Panel Cover (not shown) |

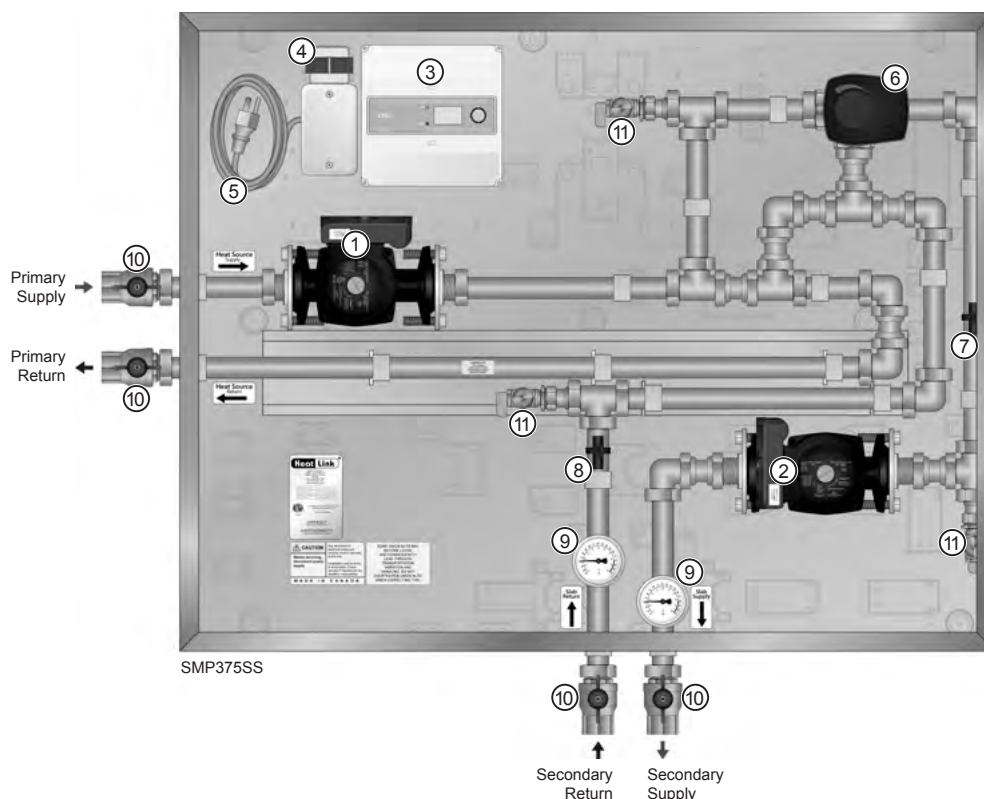

Stk#	Description	Pkg Qty	Unit	List Price / Unit
SMP375SS	SMP 300MBH SS Snow Melt Panel (No HEX; DRVWSNS-SS sold sep)	1	ea.	\$ 14,696.00
SMP375SSH	SMP 375MBH SS Snow Melt Panel with HH Pump (No HEX; DRVWSNS-SS sold sep)	1	ea.	\$ 15,877.00

Stainless Steel Snow Melt Panels with Heat Exchangers SMP000SS-HEX Series

The Snow Melt Panels are central operations centers for fully automatic snow melt systems requiring isolation. Includes the primary and secondary pumps, heat exchangers, snow melt control, mixing valve, mixing valve motor, transformer, thermometer, and isolation valves.

Standard snow melt control uses Snow/Ice Detector #DRVWSNS-SS and Outdoor Temperature Sensor #ETF-1733/44/55 (both sold separately). See [page 128](#) for panel options & accessories.

Sequence of operation:

- When the temperature read by the Snow/Ice Detector is below warm weather shutdown setting, the Snow Melt Control will activate. It will start the Primary and Secondary Pumps for 1 minute every 15 minutes to check the return water temperature.


If the return water temperature is below the minimum return water temperature the Snow Melt Control will start the Primary and Secondary Pumps, close the Auxiliary Terminals, and open the mixing valve to increase the return water temperature to the required level.

- When the Snow/Ice Detector senses snow fall, the Snow Melt Control will start the Primary and Secondary Pumps, close the Auxiliary Terminals, and open the mixing valve to increase the flow temperature to the maximum supply water temperature. When no more snow is detected by the Snow/Ice Detector, the Snow Melt Control continues to operate the system for an additional user adjustable period of time.
- When the temperature read by the Snow/Ice Detector is below cold weather cutoff setting, the Snow Melt Control will be in standby mode.

For complete specifications, see submittal [SUBSMP000SSHEX](#).

Panel Components

- | | | | |
|---------------------|------------------------------------|------------------------|---|
| ① Primary Pump | ⑤ 120Vac 6' Power Cord | ⑧ Return Sensor | ⑫ Heat Exchanger |
| ② Secondary Pump | ⑥ 3-Way Diverting Valve with Motor | ⑨ Thermometer | ⑬ Pressure Relief Valve |
| ③ Snow Melt Control | ⑦ Supply Sensor | ⑩ Isolation Valve | <input checked="" type="checkbox"/> Panel Cover (not shown) |
| ④ 24Vac Transformer | | ⑪ Drain and Fill Valve | |

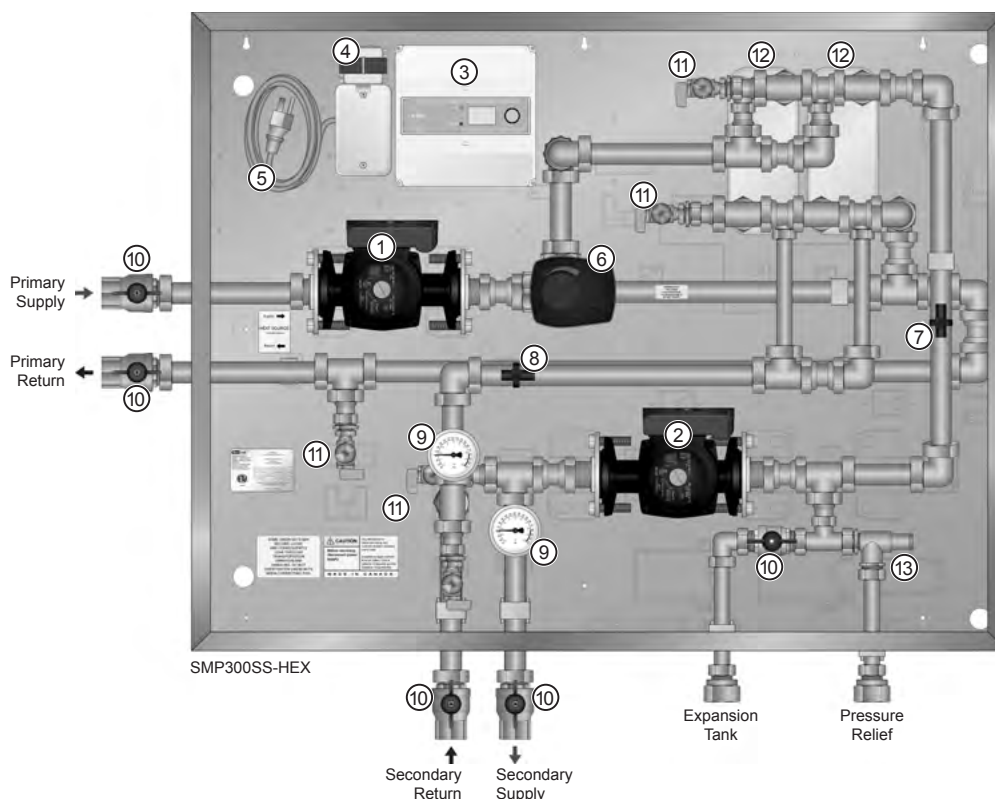

Stk#	Description	Pkg Qty	Unit	List Price / Unit
SMP175SS-HEX	SMP 175MBH SS Snow Melt Panel 2×20 HEX (DRVWSNS-SS sold sep)	1	ea.	\$ 18,575.00
SMP300SS-HEX	SMP 300MBH SS Snow Melt Panel 2×30 HEX (DRVWSNS-SS sold sep)	1	ea.	\$ 18,878.00
SMP300SS-HEX-H	SMP 365MBH SS Snow Melt Panel 3×30 HEX & HH Pump (DRVWSNS-SS sold sep)	1	ea.	\$ 21,147.00

SMP 400 MBH Snow Melt Panel without Heat Exchangers Stk# SMP400D

The SMP400D Snow Melt Panel is a central operations center for a fully automatic snow melt system with a dedicated heat source (e.g. a boiler or other non-DHW appliance). Includes the secondary pump, snow melt control, mixing valve, mixing valve motor, transformer, thermometer, pressure gauges, air eliminator, balancing valves, and isolation valves.

Standard snow melt control uses Snow/Ice Detector #DRVWSNS-SS and Outdoor Temperature Sensor #ETF-1733/44/55 (both sold separately). See [page 128](#) for panel options & accessories.

Sequence of operation:

- When the temperature read by the Snow/Ice Detector is below warm weather shutdown setting, the Snow Melt Control will activate. It will start the Secondary Pump for 1 minute every 15


minutes to check the return water temperature. If the return water temperature is below the minimum return water temperature the Snow Melt Control will start the Secondary Pump, close the Auxiliary Terminals, and open the mixing valve to increase the return water temperature to the required level.

- When the Snow/Ice Detector senses snow fall, the Snow Melt Control will start the Secondary Pump, close the Auxiliary Terminals, and open the mixing valve to increase the flow temperature to the maximum supply water temperature. When no more snow is detected by the Snow/Ice Detector, the Snow Melt Control continues to operate the system for an additional user adjustable period of time.
- When the temperature read by the Snow/Ice Detector is below cold weather cutoff setting, the Snow Melt Control will be in standby mode.

For complete specifications, see submittal [SUBSMP000D](#).

Panel Components

- | | | | |
|---------------------|------------------------------------|-----------------------------|---|
| ① Secondary Pump | ⑤ 120Vac 6' Power Cord | ⑧ Return Sensor (not shown) | ⑫ Isolation Valve |
| ② Air Eliminator | ⑥ 3-Way Diverting Valve with Motor | ⑨ Thermometer (not shown) | <input checked="" type="checkbox"/> Panel Enclosure and Cover (not shown) |
| ③ Snow Melt Control | ⑦ Supply Sensor (not shown) | ⑩ Pressure Gauge | |
| ④ 24Vac Transformer | | ⑪ Balancing Valve | |

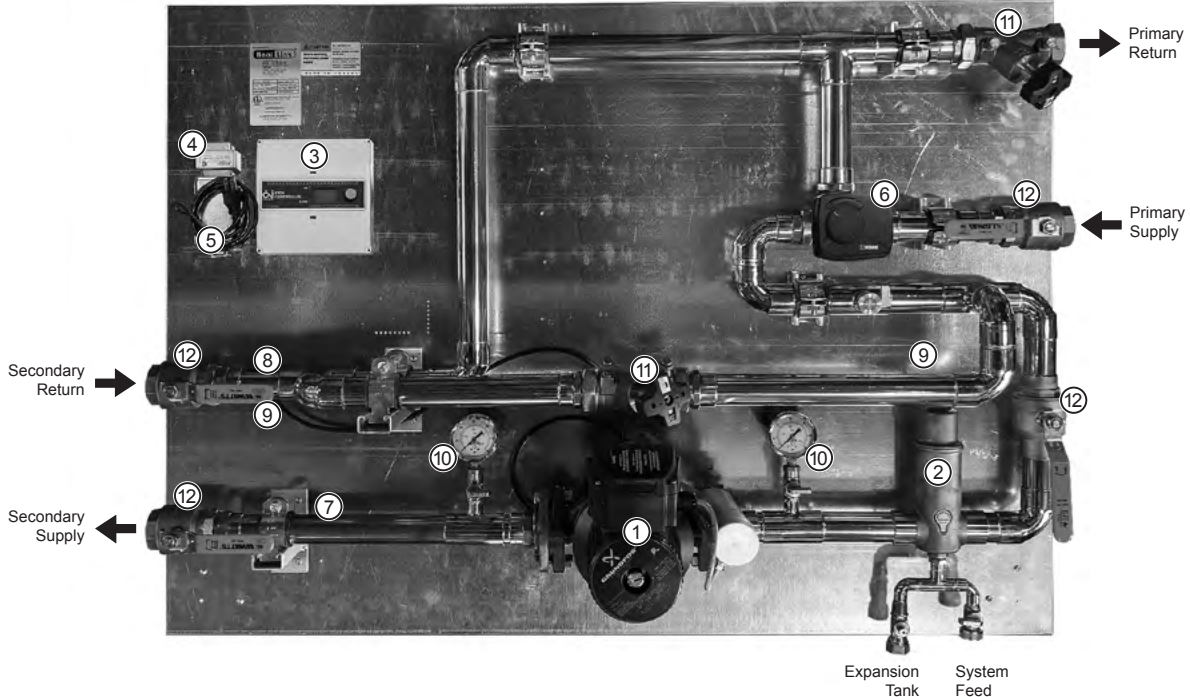

Stk#	Description	Pkg Qty	Unit	List Price / Unit
SMP400D	SMP 400MBH Copper Snow Melt Panel (No HEX; DRVWSNS-SS sold sep)	1	ea.	\$ 31,859.00

SMP 335-425 MBH Snow Melt Panels with Heat Exchangers SMP000 Series

The SMP335-425 Snow Melt Panels are central operations centers for fully automatic snow melt systems requiring isolation. Includes the secondary pump, snow melt control, mixing valve, mixing valve motor, transformer, thermometer, pressure gauges, heat exchangers, air eliminator, balancing valves, and isolation valves.

Standard snow melt control uses Snow/Ice Detector #DRVWSNS-SS and Outdoor Temperature Sensor #ETF-1733/44/55 (both sold separately). See [page 128](#) for panel options & accessories.

Sequence of operation:

- When the temperature read by the Snow/Ice Detector is below warm weather shutdown setting, the Snow Melt Control will activate. It will start the Secondary Pump for 1 minute every 15


minutes to check the return water temperature. If the return water temperature is below the minimum return water temperature the Snow Melt Control will start the Secondary Pump, close the Auxiliary Terminals, and open the mixing valve to increase the return water temperature to the required level.

- When the Snow/Ice Detector senses snow fall, the Snow Melt Control will start the Secondary Pump, close the Auxiliary Terminals, and open the mixing valve to increase the flow temperature to the maximum supply water temperature. When no more snow is detected by the Snow/Ice Detector, the Snow Melt Control continues to operate the system for an additional user adjustable period of time.
- When the temperature read by the Snow/Ice Detector is below cold weather cutoff setting, the Snow Melt Control will be in standby mode.


For complete specifications, see submittal [SUBSMP000](#).

Panel Components

- | | | | |
|------------------------|------------------------------------|----------------------|---|
| ① Secondary Pump | ⑥ 3-Way Diverting Valve with Motor | ⑩ Pressure Gauge | ⑮ Strainer |
| ② Air Eliminator | ⑦ Supply Sensor | ⑪ Balancing Valve | ⑯ Drain and Fill Valve |
| ③ Snow Melt Control | ⑧ Return Sensor | ⑫ Isolation Valve | ⑰ Pressure Relief Valve |
| ④ 24Vac Transformer | ⑨ Thermometer | ⑬ Heat Exchanger | <input checked="" type="checkbox"/> Panel Cover (not shown) |
| ⑤ 120Vac 6' Power Cord | | ⑭ Automatic Air Vent | |

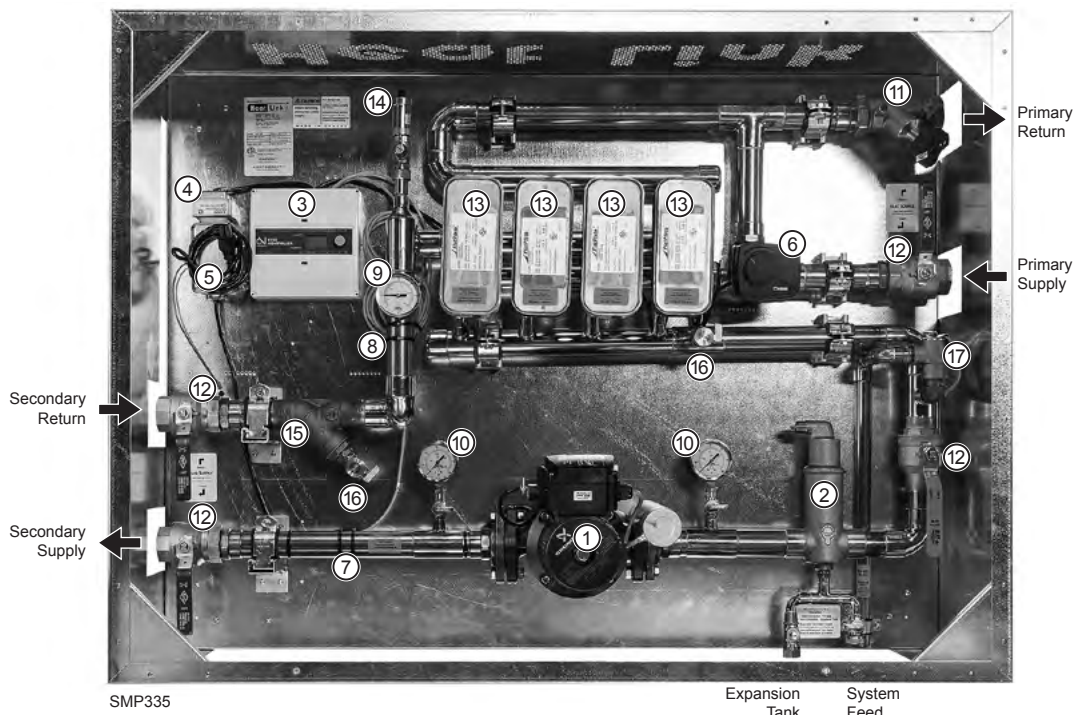

Stk#	Description	Pkg Qty	Unit	List Price / Unit
SMP335	SMP 335MBH Copper Snow Melt Panel 4×20 Plate HEX (DRVWSNS-SS sold sep)	1	ea.	\$ 40,900.00
SMP425	SMP 425MBH Copper Snow Melt Panel 4×30 Plate HEX (DRVWSNS-SS sold sep)	1	ea.	\$ 41,733.00

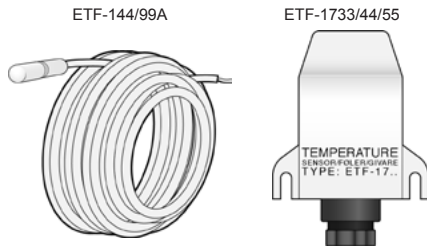

Sensor NTC 12K ETF Series

Optional NTC 12K sensors for use with the ETO2SMCNTR snow melt control, SMCP, or standard Snow Melt Panels.

For complete specifications, see submittal [SUBETF14499A](#) or [SUBETF17334455](#).

Stk#	Description	Pkg Qty	Unit	List Price / Unit
ETF-144/99A	Slab Sensor (12k) PVC Sleeve 8ft Cable for ETO2SMCNTR SnowmeltController	1	ea.	\$ 192.01
ETF-1733/44/55	Optional Outdoor Sensor for SMCP & SMP Panels	1	ea.	\$ 396.75



Snow/Ice Detector (Sensor) Stk# DRVWSNS-SS

This snow/ice sensor in conjunction with the ETO2SMCNTR snow melt control, SMCP, or standard Snow Melt Panels, activates and controls a snow melting system based on moisture (snow/ice) and slab temperature.

For complete specifications, see submittal [SUBDRVWSNSSS](#).

Stk#	Description	Pkg Qty	Unit	List Price / Unit
DRVWSNS-SS	Driveway Sensor for SMP Panels	1	ea.	\$ 2,161.33



Replace SMCP with 31680 Control for SMP Panels Stk# OPT-SMP-680

Replaces the standard snow melt panel control (SMCP) with 31680 Snow Melt Control 680-BMS BACnet ([page 77](#)).

For complete specifications, see submittal [SUB31680](#).

Stk#	Description	Pkg Qty	Unit	List Price / Unit
OPT-SMP-680	Optional SMP Control Upgrade to BMS 680 BACnet (30090,30091 Sold Sep.)	1	ea.	\$ 5,767.00



Snow/Ice Detector (Sensor) Stk# 30090, 30091

This snow/ice sensor in conjunction with the 31680, activates and controls a snow melting system based on moisture (snow/ice) and slab temperature. This control is not designed as a simple detection device and will not operate properly in an unheated slab.

For use with snow melt panels using 31680 control.

For complete specifications, see submittal [SUB30090](#).

Stk#	Description	Pkg Qty	Unit	List Price / Unit
30090	Snow/Ice Sensor (10K) 65 ft cable	1	ea.	\$ 2,139.17
30091	Snow/Ice Sensor Socket	1	ea.	\$ 486.17



J-Clips 12000 Series

Fasten tubing to joists.

For complete specifications, see submittal [SUB12000](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
12005	½" J-Clip	100	2000	ea.	\$ 0.20
12022	¾" J-Clip	100	1000	ea.	\$ 0.24
12028	1" J-Clip	50	500	ea.	\$ 0.40



Plastic Bend Support 86100 Series

Allows for easy bending support and removal.

For complete specifications, see submittal [SUB86100](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
86105	Plastic Bend Support for ¾" and ½" Tubing	1	300	ea.	\$ 1.98
86122	Plastic Bend Support for ¾" Tubing	1	400	ea.	\$ 4.12




Metal Drop Ear Bend Support Stk# 86255

Allows for easy bending support and removal of a PEX tubing stub out from a wall or floor.

For complete specifications, see submittal [SUB86255](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
86255	Metal Drop Ear Bend Support for ½" Tubing	25	100	ea.	\$ 8.28




HeatLink® Strap-on Thermometer Stk# 76940

This surface mounted thermometer is used to measure surface temperatures of metallic piping. The Strap-on Thermometers can be mounted on pipe sizes ranging from 3/8" to 1-1/2". Suggested applications: Use on stainless steel manifolds or supply and return piping to measure water temperatures.

Range: 0 - 100°C, 32 - 212°F (dual scale)

For complete specifications, see submittal [SUB76940](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
76940	Strap-on Thermometer	1		ea.	\$ 44.54

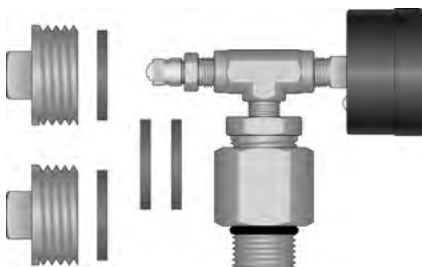

Pressure Test Kit Stk# 79935

Pressure test kit for use with heating manifolds.

TwistSeal® - replaces automatic air vent on cross tee for testing purposes.


Stainless Steel - replaces a flow meter or hose bib for testing purposes.

Kit includes two 1" plugs and 4 red rubber gaskets (2 are spares).

For air tests with the TwistSeal® Mini, use the red rubber gaskets; for hydrostatic tests use green fibre gaskets (included in manifold assembly kit).

For complete specifications, see submittal [SUB79935](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
79935	Pressure Test Kit	1		ea.	\$ 330.06

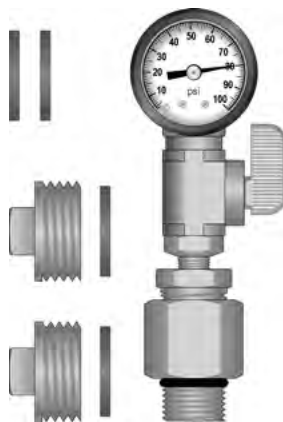

Pressure Test Kit with Valve Stk# 79965

Pressure test kit with valve for use with heating manifolds. The valve allows the gauge to be 'zeroed' and demonstrate the system is under pressure.

TwistSeal® - replaces automatic air vent on cross tee for testing purposes.


Stainless Steel - replaces a flow meter or hose bib for testing purposes.

Kit includes two 1" plugs and 4 red rubber gaskets (2 are spares).

For air tests with the TwistSeal® Mini, use the red rubber gaskets; for hydrostatic tests use green fibre gaskets (included in manifold assembly kit).

For complete specifications, see submittal [SUB79935](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
79965	Pressure Test Kit with Extra Valve to Zero Gauge	1		ea.	\$ 379.51

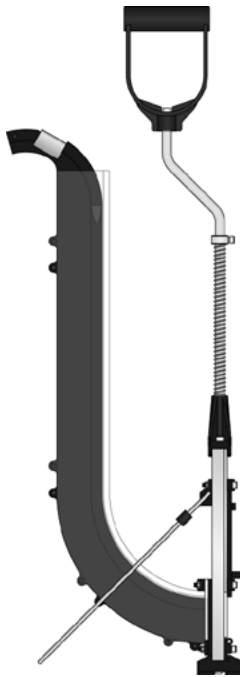


HeatLink® Deluxe Staple Gun Stk# 10230

Lightweight and easy to use manual staple gun. Use 89250 series staples to fasten up to 5/8" (or 20 mm O.D.) PEX tubing to polystyrene insulation.

For complete specifications, see submittal [SUB10230](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
10230	HeatLink® Deluxe Staple Gun	1		ea.	\$ 905.22

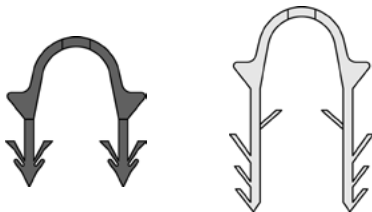

Staples for Deluxe Staple Gun 89250 Series

Staples for fastening up to 5/8" (or 20mm O.D.) PEX tubing to polystyrene insulation. For use with HeatLink® Deluxe Staple Gun #10230.

For complete specifications, see submittal [SUB89250](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
89251	300× 1-1/2" Staples for HeatLink® Deluxe Staple Gun	1	20	box	\$ 100.57
89252	300× 2" Staples for HeatLink® Deluxe Staple Gun	1	10	box	\$ 124.13



Staples for Stand-up Stapler (old style) 89240 Series

Staples for fastening up to 1/2" (or 18mm O.D.) PEX tubing to polystyrene insulation. For use with Stand-up Stapler #10220 (discontinued).

For complete specifications, see submittal [SUB89240](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
89244	300× 2-3/4" (60mm) Staples for Stand-up Stapler	1	20	box	\$ 77.66



HeatLink® Galvanized PEX Tubing Dispenser Stk# 10005

A PEX tubing dispenser is invaluable for tubing installation. Made of galvanized steel for long-term durability and maintenance free operation. Easy assembly and disassembly without tools.

Specifications:

- PEX diameter: up to ¾"
- Max coil weight: 114.6 lb (52 kg)
- Max coil height: 24" (60 cm)
- Min inner coil diameter: 11-½" (29 cm)
- Max outer coil diameter: 44" (112 cm)

For complete specifications, see submittal [SUB10005](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
10005	HeatLink Galvanized PEX Tubing Dispenser	1		ea.	\$ 745.56



PEX Tubing Cutters Stk# 10100

Quick precision cutting on PEX tubing or non-metallic tubing.

For complete specifications, see submittal [SUB10100](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
10100	HeatLink® PEX Tubing Cutters	1	50	ea.	\$ 25.03



PEX Tubing Cutter Stk# 10101

Radial tubing cutter for ½" and ¾" PEX. Keeps tubing round so fittings are easy to insert.

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
10101	HeatLink Red PEX Pipe Cutter (QC ½" & ¾")	1		ea.	\$ 39.41



Multi-purpose Wrench Stk# 79922

Wrench for use with TwistSeal® and TwistSeal® Mini manifold module nut and valve base.

For complete specifications, see submittal [SUB79922](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
79922	Multiwrench for Manifold Nut and Base	1		ea.	\$ 19.11



Assembly Tool for TwistSeal® Mini Multiport Valves Stk# 78314

Tool used to remove and install TwistSeal® Mini Multiport valve cartridges.

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
78314	Assembly tool for TwistSeal® Mini Multiport Valves	1		ea.	\$ 16.35



Non-Toxic Silicone O-Ring Lubricant Stk# 79951 & 79952

Lubrication for the manifold o-rings. Non-toxic silicone grease. Highly recommended for trouble free installation of manifold components.

For more information, see SDS alternative [L2801](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
79951	100g Bottle Non-toxic Silicone O-ring Lubricant	1		ea.	\$ 71.97
79952	10g Bottle Non-toxic Silicone O-ring Lubricant	1		ea.	\$ 14.89



Press Tool for Stainless Steel Sleeves 11300 Series

Designed to create a watertight seal, the Press Sleeve Tool has a toggle action handle. Easy to load and simple to press, the pressed stainless steel sleeve provides a finished appearance on the transition from the end of the PEX to the insert fitting.

For complete specifications, see submittal [SUB11300](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
11305	½" Standard Press Tool for SS Sleeve	1	10	ea.	\$ 467.14
11322	¾" Standard Press Tool for SS Sleeve	1	10	ea.	\$ 467.14
11325	½" & ¾" Combo Standard Press Tool for SS Sleeve	1	10	ea.	\$ 677.04
11328	1" Standard Press Tool for SS Sleeve	1	10	ea.	\$ 772.09
11335	1-¼" Standard Press Tool for SS Sleeve	1	10	ea.	\$ 1,155.57
11341	1-½" Standard Press Tool for SS Sleeve	1	10	ea.	\$ 1,319.86



Confined Space Press Tool for Stainless Steel Sleeves Stk# 11430 Series

The new Confined Space Press Tool is designed for one or two handed pressing and its unique design and expanded utility showcase HeatLink's focus on listening to the needs of customers and developing effective solutions for challenging situations. The Confined Space Tool is perfect for use in tight spaces where HPP Multiport Tees are used. It incorporates a "W" press profile for visual identification of an effective press and the handles can be opened in narrow spaces. The new tool is also smaller and lighter than the 11300 series press tools.

For complete specifications, see submittal [SUB11430](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
11433	½" Confined Space Press Tool	1	20	ea.	\$ 535.58
11434	¾" Confined Space Press Tool	1	20	ea.	\$ 535.72



Confined Space Press Tool for Stainless Steel Sleeves Stk# 11435

The Confined Space Press Tool comes with interchangeable collars for ½", ¾" and 1" PEX tubing. Adjustable lever allows for easier pressing with multiple squeezes. Comes with storage case.

For complete specifications, see submittal [SUB11435](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
11435	3-in-1 Confined Space Press Tool with Case	1		ea.	\$ 798.60



Slim-line Power Press Tool Stk# 11500

HeatLink's Slim-line Power Press Tool is designed for increased efficiency and reduced fatigue for plumbing and heating system installers. The new Slim-line tool makes larger diameter PEX connections effortless and has interchangeable jaws (sold separately) ranging from ½" to 1-½". Short pressing cycles of 3-4 seconds are now possible with HeatLink's new Slim-line tool and its efficiency is further supported by an extremely quick charging time of just 15 minutes. The tool is built using high quality and powerful Makita Li-Ion technology and incorporates biodegradable oil that is non-hazardous to water and has received the "Blue Angel" ecolabel.

Comes with one 18V 1.3Ah Li-ion battery, battery charger, and hard plastic case.

Jaws for the Power Press Tool are sold separately.

For complete specifications, see submittal [SUB11500](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
11500	Slim-line Power Press Tool	1		ea.	\$ 5,038.26



11505



11541

Jaws for Slim-line Power Press Tool 11500 Series

Jaws for use with the Slim-line Power Press Tool (#11500).

Compatible with the following third-party tools:

- Nibco PC-20M Mini
- Nibco PC-10M Mini
- Rothenberger Compact

May be compatible with other third-party tools, please contact your local representative to confirm.

For complete specifications, see submittal [SUB11505](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
11505	½" Jaws for Slim-line Power Press Tool	1	10	ea.	\$ 630.46
11522	¾" Jaws for Slim-line Power Press Tool	1	10	ea.	\$ 634.25
11528	1" Jaws for Slim-line Power Press Tool	1	10	ea.	\$ 666.89
11535	1-¼" Jaws for Slim-line Power Press Tool	1	10	ea.	\$ 665.38
11541	1-½" Jaws for Slim-line Power Press Tool	1	10	ea.	\$ 790.60



Power Press Tool with Pistol Grip Stk# 11600

HeatLink's new Pistol Grip Power Press Tool is designed for increased efficiency and reduced fatigue for plumbing and heating system installers. The Pistol Grip tool makes large diameter PEX connections effortless and features interchangeable jaws (sold separately) ranging from ½" to 2". Short pressing cycles of 3-4 seconds are now possible with HeatLink's new Pistol Grip tool, and its efficiency is further supported by an extremely quick charging time of just 15 minutes. The tool is built using high quality and powerful Makita Li-Ion technology and incorporates biodegradable oil that is non-hazardous to water and has received the "Blue Angel" ecolabel.

Comes with one 18V 1.3Ah Li-ion battery, battery charger, and hard plastic case.

Jaws for the Power Press Tool are sold separately.

For complete specifications, see submittal [SUB11600](#).

Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
11600	Power Press Tool with Pistol Grip	1		ea.	\$ 6,826.33

Jaws for Power Press Tool with Pistol Grip 11600 Series

Jaws compatible with the following third-party tools:

- Nibco PC-280
- Nibco PC-100
- Ridgid 320-E
- Ridgid RP330-B
- Ridgid CT400
- Ridgid RP330-C
- Ridgid RP340
- Milwaukee 2673-20
- Milwaukee 2673-20L
- Milwaukee 2773-20
- Milwaukee 2773-20L
- REMS 571011
- REMS 577010
- REMS 572111
- REMS 571013
- REMS 571014
- Victaulic Vic-Press™ Tool - Style PFT510

May be compatible with other third-party tools, please contact your local representative to confirm.

For complete specifications, see submittal [SUB11605](#).
































11628































11654W
















Stk#	Description	Pkg Qty	Carton Qty	Unit	List Price / Unit
11605	½" Jaws for Power Press Tool with Pistol Grip	1	10	ea.	\$ 700.78
11622	¾" Jaws for Power Press Tool with Pistol Grip	1	10	ea.	\$ 701.53
11628	1" Jaws for Power Press Tool with Pistol Grip	1	10	ea.	\$ 786.08
11635	1-¼" Jaws for Power Press Tool with Pistol Grip	1	12	ea.	\$ 805.74
11641	1-½" Jaws for Power Press Tool with Pistol Grip	1	8	ea.	\$ 871.89
11654W	2" Jaws for Power Press Tool with Pistol Grip	1		ea.	\$ 1,500.05













	Stk#	Description	Qty	Unit	List Price / Unit
TwistSeal® (55mm) Manifold					
	78401	TwistSeal® Deluxe (55mm) Zone Valve Supply Module (c/w o-ring)	1	ea.	\$ 151.82
	78402	TwistSeal® Deluxe (55mm) Balancing Return Module (c/w o-ring)	1	ea.	\$ 142.23
	78411	TwistSeal® (55mm) Zone Valve Replacement Cartridge c/w O-ring	1	ea.	\$ 101.93
	78911	TwistSeal® (55mm) Zone Valve Upgrade Assembly - <i>While Supplies Last</i>	1	ea.	\$ 100.37
	78912	TwistSeal® (55mm) Balance Valve Assembly - <i>While Supplies Last</i>	1	ea.	\$ 77.97
	78924	O-ring for TwistSeal® (55mm) Manifold Module O-ring #223.	5	ea.	\$ 5.19
	79901	TwistSeal® (55mm) Closed End Cap Self-sealing end piece which closes manifold.	1	ea.	\$ 17.81
	79902	1" TwistSeal® (55mm) Supply End Connection Self-sealing end-piece with 1" FNPT brass insert. (c/w o-ring).	1	ea.	\$ 101.48
	79908	TwistSeal® (55mm) Cross Tee	1	ea.	\$ 60.23
TwistSeal® Mini (40mm) Manifold					
	78210	TwistSeal® Mini Deluxe (40mm) Zone Valve Supply Module The supply module (c/w o-ring) provides on/off manual control to allow isolation of individual loops.	1	ea.	\$ 102.45
	78211	TwistSeal® Mini Deluxe (40mm) Balancing Return Module	1	ea.	\$ 105.24
	78221	TwistSeal® Mini (40mm) Zone Valve Replacement Cartridge c/w O-ring For TwistSeal® Mini (40 mm) shut-off modules.	1	ea.	\$ 50.45
	78311	TwistSeal® Mini Z.V. Rplcmnt. Cartridge for MultiportModule	1	ea.	\$ 34.75
	78312	TwistSeal® Mini Flow Meter Replacement Cartridge for 78300 Modules	1	ea.	\$ 64.45
















	Stk#	Description	Qty	Unit	List Price / Unit
	78811	TwistSeal® Mini (40mm) Z.V. Upgrade Asmbl. - <i>While Supplies Last</i> Upgrade TwistSeal® Mini (40 mm) valveless or compression stop modules so they can accept an actuator.	1	ea.	\$ 83.67
	78812	TwistSeal® Mini (40mm) Balance Valve Assembly - <i>While Supplies Last</i> For TwistSeal® Mini (40 mm) modules.	1	ea.	\$ 78.46
	78923	O-ring for TwistSeal® Mini (40mm) & EasyFit™ Manifold Modules O-ring #123.	5	ea.	\$ 3.22
	79801	TwistSeal® Mini (40mm) Closed End Cap Self-sealing end-piece which closes manifold.	1	ea.	\$ 12.57
	79808	TwistSeal® Mini (40mm) Cross Tee c/w O-ring - <i>While Supplies Last</i> (c/w o-ring)	1	ea.	\$ 32.90
	79815	1" TwistSeal® Mini (40mm) Union Cross Tee End Connection (c/w o-ring)	1	ea.	\$ 105.28
	79942	Pair Thermometers for TwistSeal® Mini Union Cross Tee End Connection	1	pair	\$ 67.88
	79953	Red Rubber Gasket for 1" Union End Connection (40mm) Air Tests - <i>While Supplies Last</i>	1	pair	\$ 10.31
	79954	Gasket for TwistSeal® Mini (40mm) 1" Union Supply End Connection	1	pair	\$ 9.85
TwistSeal® (40 & 55mm) Manifold					
	77012	3/8" PEX to TwistSeal® Manifold Connector - <i>While Supplies Last</i>	1	pair	\$ 33.20
	77729	O-ring for PEX to TwistSeal® Manifold Connector 15x2mm o-ring for use with #77000 Series & #23000 Series.	10	ea.	\$ 1.53
	78902	Plastic Nut for TwistSeal® Manifold Modules	1	ea.	\$ 10.99
	78904	Shut-off Cap TwistSeal® - Red - <i>While Supplies Last</i>	1	ea.	\$ 8.62
	78905	TwistSeal® Zone Actuator Base (40mm & 55mm) - <i>While Supplies Last</i>	1	ea.	\$ 3.81
	78906	Balancing Valve Cap with Clip for TwistSeal® Manifold - <i>While Supplies Last</i>	1	ea.	\$ 19.36
















	Stk#	Description	Qty	Unit	List Price / Unit
	78921	O-ring for TwistSeal® Valve Insert (40 & 55mm) - <i>While Supplies Last</i> O-ring #116.	5	ea.	\$ 1.24
	78922	O-ring for TwistSeal® Balancing Shaft - 6×2mm (Cone Side) - <i>While Supplies Last</i>	5	ea.	\$ 2.90
	79911	½" Cross Tee Plug For use with Cross Tee, comes complete with o-ring.	1	ea.	\$ 4.51
	79930	Metal Hose Bib System can easily be charged at manifold location. For use with the Cross Tee.	1	ea.	\$ 105.33
	79931	Manual Air Vent Used for manually removing air from system. For use with the Cross Tee.	1	ea.	\$ 15.57
	79932	Metal Automatic Air Vent Automatically removes air from system. For use with Cross Tee.	1	ea.	\$ 86.85
	79933	Manual Air Vent Key - 5mm Square, Blue Opens the manual air vent (#79931).	1	ea.	\$ 3.93
	79934	Plastic Hose Bib System can easily be charged at manifold location. For use with the Cross Tee.	1	ea.	\$ 48.92
	79936	Plastic Automatic Air Vent Automatically removes air from system. For use with Cross Tee.	1	ea.	\$ 39.50
	79940	Pair Thermometers c/w Well for TwistSeal® Manifolds	1	pair	\$ 156.03
	79955	O-ring for ½" Cross Tee Accessories - <i>While Supplies Last</i> O-ring #115.	5	ea.	\$ 0.93
1-¼" Stainless Steel Manifold					
	76101	Mounting Bracket for SS Manifold	1	ea.	\$ 54.02
	76192	1" NPT Adapter for SS Manifold - <i>While Supplies Last</i>	1	ea.	\$ 56.17
	76911	Zone Valve Insert for 1-¼" SS Manifold (Return)	1	ea.	\$ 39.29
	76912	Balancing Valve Insert for High Flow SS Manifold (Supply)	1	ea.	\$ 29.89







	Stk#	Description	Qty	Unit	List Price / Unit
	76916	Flow Meter Valve Insert (0-1.5 USgpm Lock Nut) for 1-1/4" SS Mfd (Sup.) Only compatible with #76918 Manifold Connector Base.	1	ea.	\$ 70.33
	76917	Flow Meter Valve Insert (0-6 L/min) for 1-1/4" SS Manifold (New Design)	1	ea.	\$ 68.45
	76918	Connector Base for 1-1/4" SS Manifold (Flow Meter w/Lock Nut) Only compatible with #76916 Flow Meter with Lock Nut.	1	ea.	\$ 14.22
	76919	Connector Base for 1-1/4" SS Manifold Not compatible with #76916 Flow Meter with Lock Nut.	1	ea.	\$ 14.30
	76922	1" Ball Valve Set for 1-1/4" SS Manifold	1	set	\$ 311.27
	76924	O-ring for 1-1/4" SS Manifold Coupling and End Connections - <i>While Supplies Last</i>	1	ea.	\$ 4.23
	76925	Black Shut-off Cap for 1-1/4" SS Manifold	1	ea.	\$ 7.19
	76930	Hose Bib for 1-1/4" SS Manifold	1	ea.	\$ 68.09
	76936	Pressure Bypass for 1-1/4" SS Manifold (requires 77105 & PEX)	1	ea.	\$ 391.90
	77739	O-ring for PEX to 1-1/4" SS Manifold Connector - <i>While Supplies Last</i> 14x2.5 o-ring for 1/2" and 3/8" connectors.	10	ea.	\$ 2.45
2" Stainless Steel Manifold					
	76680	O-ring for 2" SS Manifold, Closed End, and Open End Adapters - <i>While Supplies Last</i>	1	ea.	\$ 5.42
	77600	O-Ring for 2" Manifold PEX Connectors - <i>While Supplies Last</i>	1	ea.	\$ 1.75
PEX Compression Couplings					
	68012	3/8" PEX Comp. x 1/2" MNPT Adapter - <i>While Supplies Last</i>	1	ea.	\$ 16.93

	Stk#	Description	Qty	Unit	List Price / Unit
Valves - 3-Way Mixing					
	63026.1	1" 3- & 4-Way Valve Shaft & Seal Kit	1	ea.	\$ 139.30
	63542.1	1-1/4" and 1-1/2" 3- & 4-Way Valve Shaft & Seal Kit	1	ea.	\$ 121.90
	63551.1	2" 3- & 4-Way Valve Shaft & Seal Kit	1	ea.	\$ 121.90
Valves					
	62816	Zone Valve Insert 1/2" (Blue Cap) - <i>While Supplies Last</i>	1	ea.	\$ 92.60
	62916	Radiator Valve Insert 1/2" (Black Cap) - <i>While Supplies Last</i>	1	ea.	\$ 80.56
	62920	Radiator Valve Insert 3/4" (Black Cap) - <i>While Supplies Last</i>	1	ea.	\$ 100.48
	62925	Zone Valve Insert 1" (Black Cap) - <i>While Supplies Last</i>	1	ea.	\$ 129.89
	62930	Zone Valve Insert 1-1/4" (Black Cap) and 3/4" (Blue Cap) - <i>While Supplies Last</i>	1	ea.	\$ 139.69
	62900V	Zone Valve Insert for 62000V Series Valves	1	ea.	\$ 82.52
	64931	Pressure Activated Bypass for Mixing Block 64331 - <i>While Supplies Last</i>	1	ea.	\$ 138.51
	64950	1-1/2" & 2" 4-Way Cast Iron Mixing Valve Repair Kit - <i>While Supplies Last</i> For 3-way v1 and 4-way v1 mixing valves.	1	ea.	\$ 461.16
Mixing Valve Motors					
	58052	Plastic Mixing Valve Motor Coupling for 1" - 2" 4-Way Valves - <i>While Supplies Last</i>	1	ea.	\$ 39.97
	58130.1	Adapter for HeatLink 1" - 2" Rotary Actuator to WITA Valve	1	ea.	\$ 136.21
	58850	Accessory Pack #58150 v2 Mounted on Black Cast Iron Mixing Valve - <i>While Supplies Last</i>	1	ea.	\$ 49.66
	58950	Accessory Pack for #58150 v1 (Rectangle, SM5) - <i>While Supplies Last</i>	1	ea.	\$ 46.88

	Stk#	Description	Qty	Unit	List Price / Unit
	58199	Mixing Valve Motor for 2-½" to 4" Flange Mixing Valves - <i>While Supplies Last</i>	1	ea.	\$ 582.98
	58200.1	Metal Drive Sleeve for 58200 / 58300 Mixing Valve Motor	1	ea.	\$ 174.53
Actuators					
	56081	Zone Valve Ring for 56201 and 56231 Actuator - <i>While Supplies Last</i>	1	ea.	\$ 2.92
	56090	TwistSeal® Manifold Actuator Ring - <i>While Supplies Last</i>	1	ea.	\$ 6.12
	56091	Valve Actuator Ring - <i>While Supplies Last</i>	1	ea.	\$ 6.38
Thermostats					
	45813	1A TimeDelay(SlowBlow)5×20mmGlassFuse for 461Thermostats - <i>While Supplies Last</i>	1	ea.	\$ 6.24
Relays					
	45032	8 Pin Round Socket for AC Relay - <i>While Supplies Last</i>	1	ea.	\$ 46.39
StatLink®					
	45822	2A Medium Lag (Med. Blow) 5×20mm Glass Fuse for 40190 - <i>While Supplies Last</i>	1	pair	\$ 12.47
System Controls					
	30092	SnowMeltingKit-Start/StopModule w/Slab and UniversalSensor - <i>While Supplies Last</i>	1	ea.	\$ 1,372.61
Sensors					
	30076	Indoor Sensor (10K) Small Enclosure - <i>While Supplies Last</i>	1	ea.	\$ 114.23
	30077	Indoor Sensor (10K) Flush Mount - <i>While Supplies Last</i>	1	ea.	\$ 176.11
	ETF1899ASNS	Sensor NTC 12K (Spare parts for #SMCP) - Special Order**	1	ea.	\$ 174.22

	Stk#	Description	Qty	Unit	List Price / Unit
Tools					
	10091	Dispenser Pin Set For Narrow PEX Coils - <i>While Supplies Last</i>	1	set	\$ 285.15
	10092	Dispenser Pin Set For Large PEX Coils - <i>While Supplies Last</i>	1	set	\$ 285.15
	11252	½" and ¾" EasyFit™ Wrench - <i>While Supplies Last</i>	1	ea.	\$ 12.87
	11328.1	1" Standard Press Tool for SS Sleeve - Go-No-Go Gauge	1	ea.	\$ 31.47
	11335.1	1-¼" Standard Press Tool for SS Sleeve - Go-No-Go Gauge - <i>While Supplies Last</i>	1	ea.	\$ 26.43
	11433.1	Confined Space Tool Gauge (All Sizes)	1	ea.	\$ 14.27
	11435.3	½" SS Collars (Set) for #11435 - <i>While Supplies Last</i>	1	ea.	\$ 82.36
	11435.4	¾" SS Collars (Set) for #11435 - <i>While Supplies Last</i>	1	ea.	\$ 82.36
	11438	E-Clips for Confined Space Tools (12 per bag) For 11433, 11434, and 11435.	1	bag	\$ 27.05
	11439	Rebuild Kit for Confined Space Tool For 11433 and 11434.	1	ea.	\$ 75.41
	11901	Replacement Retaining Rings for Press Tools (10 per bag) For 11305, 11322, 11325, 11328, 11335, 11341, 11405, and 11422.	1	bag	\$ 15.28
	11902	Rebuild Kit for Straight ½" & ¾" Press Tools For metal and composite handle 11305 and 11322.	1	ea.	\$ 130.87
	11903	Rebuild Kit for 1", 1-¼" Angle, Straight and Combo Press Tools For 11325, 11328, 11335, 11341, 11405, and 11422.	1	ea.	\$ 135.54
Water Quality					
	01321	1L Postoperational Filtration Cleaner - <i>While Supplies Last</i>	1	L	\$ 380.02
	02191	O-Ring for the Side Stream Filter - <i>While Supplies Last</i>	1	ea.	\$ 59.00

	Stk#	Description	Qty	Unit	List Price / Unit
Mechanical Room in a Box					
	NTRWSH1	1" x 3mm Blk Nitrile Washer for Panels	5	ea.	\$ 5.95
	NTRWSH1-SRV	1" x 1.5mm Blk Nitrile (replacement washers Pre-2014 Panels)	5	ea.	\$ 5.22
	NTRWSH34	3/4" x 3mm Blk Nitrile Washer for Panels	5	ea.	\$ 3.03
	NTRWSH34-SRV	3/4" x 1.5mm Blk Nitrile (replacement washers Pre-2014 Panels)	5	ea.	\$ 2.64
	PLC1R2	Controller for TMP040/070, SMP, ZMP, ELB and old SSP/SST	1	ea.	\$ 1,195.81
	PLC4AR2	Controller for TMP085DP, TMP200DT	1	ea.	\$ 1,252.46
	PLC5R2	Controller for TWH070Z using FLWSWTCH	1	ea.	\$ 1,823.59
	PLC6R2P3	Controller for CDP Panels with 3 Pumps	1	ea.	\$ 1,382.76
	PLC6R2P4	Controller for CDP Panels with 4 Pumps	1	ea.	\$ 1,742.31
	PLC7R1P1	Controller for WHP using HEPPS	1	ea.	\$ 1,408.13
	PLC7R1P2	Controller for HEP using HEPPS	1	ea.	\$ 1,408.13
	PLC7R1P2-TWH	Controller for TWH (except for Z models) using HEPPS	1	ea.	\$ 1,436.82
	PLC7R2P1	Controller for WHP using FLWSWTCH	1	ea.	\$ 1,195.21
	PLC7R2P2	Controller for HEP, TWH (except Z) using FLWSWTCH	1	ea.	\$ 1,195.78
	PWRB2TH	Power Box 2-Terminal Header - <i>While Supplies Last</i>	5	ea.	\$ 11.81

	Stk#	Description	Qty	Unit	List Price / Unit
	PWRB3TH	Power Box 3-Terminal Header - <i>While Supplies Last</i>	5	ea.	\$ 17.82
	PLINTR40VA	24Vac 40VA Plug-in Transformer for Panels	1	ea.	\$ 227.30
	CHVLV20	Check Valve for UPS15-58 Pump	1	ea.	\$ 42.29
	PUMP1558	UPS15-58RU Composite 115V Pump	1	ea.	\$ 659.32
	PUMP2699	UPS26-99FC 115V Cast Iron Pump	1	ea.	\$ 1,561.54
	PUMP2699BR	UPS26-99BFC 115V Bronze Pump	1	ea.	\$ 2,502.98

Stk#	Description	Status	Pkg Qty	Unit	List Price / Unit	Pg.
00412	HeatLink Preventative Maintenance Water Analysis		1	ea.	\$ 498.34	84
01205	1L Corrosion Inhibitor (Molybdate Based)		1	bottle	\$ 125.64	84
01311	1L Purging Compound (Pre & Post Operational Cleaner)		1	bottle	\$ 225.55	84
01321	1L Postoperational Filtration Cleaner	WSL	1	L	\$ 380.02	144
02191	O-Ring for the Side Stream Filter	WSL	1	ea.	\$ 59.00	144
10005	HeatLink Galvanized PEX Tubing Dispenser		1	ea.	\$ 745.56	132
10091	Dispenser Pin Set For Narrow PEX Coils	WSL	1	set	\$ 285.15	144
10092	Dispenser Pin Set For Large PEX Coils	WSL	1	set	\$ 285.15	144
10100	HeatLink® PEX Tubing Cutters		1	ea.	\$ 25.03	132
10101	HeatLink Red PEX Pipe Cutter (QC ½" & ¾")		1	ea.	\$ 39.41	132
10230	HeatLink® Deluxe Staple Gun		1	ea.	\$ 905.22	131
11252	½" and ¾" EasyFit™ Wrench	WSL	1	ea.	\$ 12.87	144
11305	½" Standard Press Tool for SS Sleeve		1	ea.	\$ 467.14	134
11322	¾" Standard Press Tool for SS Sleeve		1	ea.	\$ 467.14	134
11325	½" & ¾" Combo Standard Press Tool for SS Sleeve		1	ea.	\$ 677.04	134
11328	1" Standard Press Tool for SS Sleeve		1	ea.	\$ 772.09	134
11328.1	1" Standard Press Tool for SS Sleeve - Go-No-Go Gauge		1	ea.	\$ 31.47	144
11335	1-¼" Standard Press Tool for SS Sleeve		1	ea.	\$ 1,155.57	134
11335.1	1-¼" Standard Press Tool for SS Sleeve - Go-No-Go Gauge	WSL	1	ea.	\$ 26.43	144
11341	1-½" Standard Press Tool for SS Sleeve		1	ea.	\$ 1,319.86	134
11433	½" Confined Space Press Tool		1	ea.	\$ 535.58	135
11433.1	Confined Space Tool Gauge (All Sizes)		1	ea.	\$ 14.27	144
11434	¾" Confined Space Press Tool		1	ea.	\$ 535.72	135
11435	3-in-1 Confined Space Press Tool with Case		1	ea.	\$ 798.60	135
11435.1	Replacement Blade Kit for #11435	Discontinued	1	ea.	\$ 73.43	
11435.2	Rebuild Kit for #11435	Discontinued	1	ea.	\$ 117.09	
11435.3	½" SS Collars (Set) for #11435	WSL	1	ea.	\$ 82.36	144
11435.4	¾" SS Collars (Set) for #11435	WSL	1	ea.	\$ 82.36	144
11435.5	1" SS Collars (Set) for #11435	Discontinued	1	ea.	\$ 79.92	
11438	E-Clips for Confined Space Tools (12 per bag)		1	bag	\$ 27.05	144
11439	Rebuild Kit for Confined Space Tool		1	ea.	\$ 75.41	144
11500	Slim-line Power Press Tool		1	ea.	\$ 5,038.26	136
11505	½" Jaws for Slim-line Power Press Tool		1	ea.	\$ 630.46	136
11522	¾" Jaws For Slim-line Power Press Tool		1	ea.	\$ 634.25	136
11528	1" Jaws for Slim-line Power Press Tool		1	ea.	\$ 666.89	136
11535	1-¼" Jaws for Slim-line Power Press Tool		1	ea.	\$ 665.38	136
11541	1-½" Jaws for Slim-line Power Press Tool		1	ea.	\$ 790.60	136
11600	Power Press Tool with Pistol Grip		1	ea.	\$ 6,826.33	137
11605	½" Jaws for Power Press Tool with Pistol Grip		1	ea.	\$ 700.78	137
11622	¾" Jaws for Power Press Tool with Pistol Grip		1	ea.	\$ 701.53	137
11628	1" Jaws for Power Press Tool with Pistol Grip		1	ea.	\$ 786.08	137
11635	1-¼" Jaws for Power Press Tool with Pistol Grip		1	ea.	\$ 805.74	137
11641	1-½" Jaws for Power Press Tool with Pistol Grip		1	ea.	\$ 871.89	137
11654W	2" Jaws for Power Press Tool with Pistol Grip		1	ea.	\$ 1,500.05	137
11901	Replacement Retaining Rings for Press Tools (10 per bag)		1	bag	\$ 15.28	144
11902	Rebuild Kit for Straight ½" & ¾" Press Tools		1	ea.	\$ 130.87	144
11903	Rebuild Kit for 1", 1-¼" Angle, Straight and Combo Press Tools		1	ea.	\$ 135.54	144
12005	½" J-Clip		100	ea.	\$ 0.20	129
12022	¾" J-Clip		100	ea.	\$ 0.24	129
12028	1" J-Clip		50	ea.	\$ 0.40	129
13202M	2 Port, ¾" PEX × Closed End HPP Mini Multiport Tee		5	ea.	\$ 9.853	13

Stk#	Description	Status	Pkg Qty	Unit	List Price / Unit	Pg.
13203	3 Port Single Row, 3/4" PEX × Closed End HPP Multiport Tee	WSL	5	ea.	\$ 40.251	13
13203M	3 Port, 3/4" PEX × Closed End HPP Mini Multiport Tee		5	ea.	\$ 13.093	13
13204	4 Port Single Row, 3/4" PEX × Closed End HPP Multiport Tee		5	ea.	\$ 35.836	13
13204M	4 Port, 3/4" PEX × Closed End HPP Mini Multiport Tee		5	ea.	\$ 16.653	13
13206	6 Port Single Row, 3/4" PEX × Closed End HPP Multiport Tee		5	ea.	\$ 42.779	13
13208	8 Port Single Row, 3/4" PEX × Closed End HPP Multiport Tee		5	ea.	\$ 70.335	13
13806	6 Port Single Row, 1" PEX × Closed End HPP Multiport Tee	Discontinued	5	ea.	\$ 49.112	
13808	8 Port Single Row, 1" PEX × Closed End HPP Multiport Tee	WSL	5	ea.	\$ 62.220	13
13833	6 Port Opposing Rows, 1" PEX × Closed End HPP Multiport Tee	WSL	5	ea.	\$ 38.290	13
13844	8 Port Opposing Rows, 1" PEX × Closed End HPP Multiport Tee	WSL	5	ea.	\$ 44.030	13
14202M	2 Port, 3/4" PEX × 3/4" PEX Flow Through HPP Mini Multiport Tee		5	ea.	\$ 10.444	14
14203	3 Port Single Row, 3/4" PEX × 3/4" PEX Flow Through HPP Multiport Tee	WSL	5	ea.	\$ 29.767	14
14203M	3 Port, 3/4" PEX × 3/4" PEX Flow Through HPP Mini Multiport Tee		5	ea.	\$ 13.762	14
14204	4 Port Single Row, 3/4" PEX × 3/4" PEX Flow Through HPP Multiport Tee	WSL	5	ea.	\$ 31.294	14
14204M	4 Port, 3/4" PEX × 3/4" PEX Flow Through HPP Mini Multiport Tee		5	ea.	\$ 17.203	14
14233	6 Port Opposing Rows, 3/4" PEX × 3/4" PEX Flow Through HPP Multiport Tee	WSL	5	ea.	\$ 39.023	14
14244	8 Port Opposing Rows, 3/4" PEX × 3/4" PEX Flow Through HPP Multiport Tee	WSL	5	ea.	\$ 44.030	14
14703	3 Port Single Row, 1" PEX × 3/4" PEX Flow Through HPP Multiport Tee	WSL	5	ea.	\$ 27.250	14
14704	4 Port Single Row, 1" PEX × 3/4" PEX Flow Through HPP Multiport Tee	WSL	5	ea.	\$ 36.010	14
14706	6 Port Single Row, 1" PEX × 3/4" PEX Flow Through HPP Multiport Tee	WSL	5	ea.	\$ 60.468	14
14708	8 Port Single Row, 1" PEX × 3/4" PEX Flow Through HPP Multiport Tee	WSL	5	ea.	\$ 60.073	14
14733	6 Port Opposing Rows, 1" PEX × 3/4" PEX Flow Through HPP Multiport Tee	WSL	5	ea.	\$ 38.290	14
14744	8 Port Opposing Rows, 1" PEX × 3/4" PEX Flow Through HPP Multiport Tee	WSL	5	ea.	\$ 44.030	14
15005	1/2" PEX HPP Plug		25	ea.	\$ 0.904	26
15022	3/4" PEX HPP Plug		25	ea.	\$ 1.481	26
15028	1" PEX HPP Plug		5	ea.	\$ 2.408	26
16222	3/4" × 3/4" × 3/4" PEX HPP Tee		25	ea.	\$ 3.377	24
16225	3/4" × 3/4" × 1/2" PEX HPP Tee		25	ea.	\$ 3.160	24
16228	3/4" × 3/4" × 1" PEX HPP Tee		5	ea.	\$ 7.455	24
16252	3/4" × 1/2" × 3/4" PEX HPP Tee		25	ea.	\$ 3.362	24
16255	3/4" × 1/2" × 1/2" PEX HPP Tee		25	ea.	\$ 2.664	24
16552	1/2" × 1/2" × 3/4" PEX HPP Tee		25	ea.	\$ 2.851	24
16555	1/2" × 1/2" × 1/2" PEX HPP Tee		25	ea.	\$ 2.299	24
16822	1" × 3/4" × 3/4" PEX HPP Tee		5	ea.	\$ 7.631	24
16828	1" × 3/4" × 1" PEX HPP Tee		5	ea.	\$ 7.158	24
16882	1" × 1" × 3/4" PEX HPP Tee		5	ea.	\$ 7.051	24
16885	1" × 1" × 1/2" PEX HPP Tee		10	ea.	\$ 6.804	24
16888	1" × 1" × 1" PEX HPP Tee		10	ea.	\$ 9.008	24
17505	1/2" PEX × 1/2" MNPT HPP Adapter		25	ea.	\$ 2.582	20
17522	3/4" PEX × 3/4" MNPT HPP Adapter		25	ea.	\$ 3.362	20
17525	3/4" PEX × 1/2" MNPT HPP Adapter	WSL	25	ea.	\$ 2.110	20
17552	1/2" PEX × 3/4" MNPT HPP Adapter		25	ea.	\$ 3.239	20
17705	1/2" PEX × Ballcock/Closet FNPT Swivel HPP Adapter	WSL	25	ea.	\$ 3.920	22
17755	1/2" PEX × 1/2" FNPT Swivel HPP Adapter		25	ea.	\$ 3.242	22
18005	1/2" × 1/2" PEX HPP Elbow		25	ea.	\$ 1.574	18
18022	3/4" × 3/4" PEX HPP Elbow		25	ea.	\$ 2.678	18
18028	1" × 1" PEX HPP Elbow		10	ea.	\$ 6.292	18
18225	3/4" × 1/2" PEX HPP Elbow		10	ea.	\$ 2.504	18
18605	1/2" PEX × 1/2" FNPT HPP Swivel Elbow	WSL	25	ea.	\$ 3.050	22
19005	1/2" × 1/2" PEX HPP Coupling		25	ea.	\$ 1.250	17
19022	3/4" × 3/4" PEX HPP Coupling		25	ea.	\$ 1.910	17

Stk#	Description	Status	Pkg Qty	Unit	List Price / Unit	Pg.
19028	1" x 1" PEX HPP Coupling		10	ea.	\$ 3.711	17
19225	¾" x ½" PEX HPP Coupling		25	ea.	\$ 1.533	17
19282	1" x ¾" PEX HPP Coupling		5	ea.	\$ 3.629	17
20105	½" 100ft Blue PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 104.100	5
20105BW	½" 100ft Blue Wall PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 115.700	7
20122	¾" 100ft Blue PureLink® Plus UV Stabilized PEX-a PexCube™		3	coil	\$ 181.000	5
20122BW	¾" 100ft Blue Wall PureLink® Plus UV Stabilized PEX-a PexCube™		3	coil	\$ 200.700	7
20128	1" 100ft Blue PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 352.10	43, 5
20128BW	1" 100ft Blue Wall PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 390.600	7
20135	1-¼" 100ft PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 660.800	9
20145	1-½" 100ft PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 871.800	9
20154	2" 100ft PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 1,735.300	9
20205	½" 20x20ft Blue PureLink® Plus UV Stabilized PEX-a Tubing		1	bundle	\$ 416.400	5
20205BW	½" 20x20ft Blue Wall PureLink® Plus UV Stabilized PEX-a Tubing		1	bundle	\$ 462.800	7
20222	¾" 10x20ft Blue PureLink® Plus UV Stabilized PEX-a Tubing		1	bundle	\$ 362.000	5
20222BW	¾" 10x20ft Blue Wall PureLink® Plus UV Stabilized PEX-a Tubing		1	bundle	\$ 401.400	7
20228	1" 5x20ft Blue PureLink® Plus UV Stabilized PEX-a Tubing		1	bundle	\$ 352.100	5
20228BW	1" 5x20ft Blue Wall PureLink® Plus UV Stabilized PEX-a Tubing		1	bundle	\$ 390.600	7
20235	1-¼" 5x20ft PureLink® Plus UV Stabilized PEX-a Tubing		1	bundle	\$ 660.800	9
20245	1-½" 5x20ft PureLink® Plus UV Stabilized PEX-a Tubing		1	bundle	\$ 871.800	9
20254	2" 5x20ft PureLink® Plus UV Stabilized PEX-a Tubing		1	bundle	\$ 1,735.300	9
20305	½" 300ft Blue PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 312.30	43, 5
20305BW	½" 300ft Blue Wall PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 347.100	7
20322	¾" 300ft Blue PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 543.00	43, 5
20322BW	¾" 300ft Blue Wall PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 602.100	7
20328	1" 300ft Blue PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 1,056.30	43, 5
20328BW	1" 300ft Blue Wall PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 1,171.800	7
20335	1-¼" 300ft PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 1,982.400	9
20345	1-½" 300ft PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 2,615.400	9
20354	2" 300ft PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 5,205.900	9
20505	½" 500ft Blue PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 520.50	43, 5
20522	¾" 500ft Blue PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 905.00	43, 5
20905	½" 1000ft Blue PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 1,041.00	43, 5
21105	½" 100ft Red PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 104.100	6
21105RW	½" 100ft Red Wall PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 115.700	8
21122	¾" 100ft Red PureLink® Plus UV Stabilized PEX-a PexCube		3	coil	\$ 181.000	6
21122RW	¾" 100ft Red Wall PureLink® Plus UV Stabilized PEX-a PexCube™		3	coil	\$ 200.700	8
21128	1" 100ft Red PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 352.100	6
21128RW	1" 100ft Red Wall PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 390.600	8
21205	½" 20x20ft Red PureLink® Plus UV Stabilized PEX-a Tubing		1	bundle	\$ 416.400	6
21205RW	½" 20x20ft Red Wall PureLink® Plus UV Stabilized PEX-a Tubing		1	bundle	\$ 462.800	8
21222	¾" 10x20ft Red PureLink® Plus UV Stabilized PEX-a Tubing		1	bundle	\$ 362.000	6
21222RW	¾" 10x20ft Red Wall PureLink® Plus UV Stabilized PEX-a Tubing		1	bundle	\$ 401.400	8
21228	1" 5x20ft Red PureLink® Plus UV Stabilized PEX-a Tubing		1	bundle	\$ 352.100	6
21228RW	1" 5x20ft Red Wall PureLink® Plus UV Stabilized PEX-a Tubing		1	bundle	\$ 390.600	8
21305	½" 300ft Red PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 312.300	6
21305RW	½" 300ft Red Wall PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 347.100	8
21322	¾" 300ft Red PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 543.000	6
21322RW	¾" 300ft Red Wall PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 602.100	8
21328	1" 300ft Red PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 1,056.300	6
21328RW	1" 300ft Red Wall PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 1,171.800	8

Stk#	Description	Status	Pkg Qty	Unit	List Price / Unit	Pg.
21505	½" 500ft Red PureLink® Plus UV Stabilized PEX-a Tubing		1	coil	\$ 520.500	6
23015	½" PEX Insert Manifold Connector		5	ea.	\$ 5.48	49
23032	¾" PEX Insert Manifold Connector c/w Nut		5	ea.	\$ 10.27	49
23305NL	½" PEX F1807 No Lead Brass Ball Valve, Full Port	New!	10	ea.	\$ 12.560	28
23322NL	¾" PEX F1807 No Lead Brass Ball Valve, Full Port	New!	10	ea.	\$ 19.440	28
23328NL	1" PEX F1807 No Lead Brass Ball Valve, Full Port	New!	6	ea.	\$ 33.860	28
23335NL	1-¼" PEX F1807 No Lead Brass Ball Valve, Full Port	New!	4	ea.	\$ 53.590	28
23341NL	1-½" PEX F1807 No Lead Brass Ball Valve, Full Port	New!	2	ea.	\$ 72.900	28
23354NL	2" PEX F1807 No Lead Brass Ball Valve, Full Port	New!	2	ea.	\$ 122.660	28
23405NL	½" PEX × ½" No Lead M/Sweat Straight Ball Valve	WSL	24	ea.	\$ 11.820	28
23422NL	¾" PEX × ¾" MNPT No Lead Straight Ball Valve	Discontinued; see 23822NL	12	ea.	\$ 50.720	
23505NL	½" PEX × ¾" O.D. No Lead Brass Plated Straight Ball Valve		24	ea.	\$ 29.655	27
23605NL	½" PEX × ¾" O.D. No Lead Brass Plated Angle Ball Valve		24	ea.	\$ 30.412	27
23705NL	½" PEX Straight No Lead Brass Ball Valve		24	ea.	\$ 31.861	27
23722NL	¾" PEX Straight No Lead Brass Ball Valve		24	ea.	\$ 40.062	27
23772NL	¾" PEX No Lead Stop and Waste Valve	WSL	12	ea.	\$ 43.740	27
23775NL	½" PEX No Lead Stop and Waste Valve	WSL	24	ea.	\$ 35.190	27
23822NL	¾" PEX F1807 × ¾" MNPT No Lead Brass Ball Valve	New!	10	ea.	\$ 26.180	28
23905NL	½" PEX × ¼" O.D. No Lead Straight Ball Valve		24	ea.	\$ 36.775	27
24205	½" SS Press Sleeve		100	ea.	\$ 0.568	12
24222	¾" SS Press Sleeve		50	ea.	\$ 0.893	12
24228	1" SS Press Sleeve		50	ea.	\$ 1.831	12
24235	1-¼" SS Press Sleeve		10	ea.	\$ 7.280	12
24241	1-½" SS Press Sleeve		10	ea.	\$ 8.652	12
24250	2" SS Press Sleeve		10	ea.	\$ 10.511	12
25005NL	½" PEX No Lead Brass Plug		25	ea.	\$ 2.532	26
25022NL	¾" PEX No Lead Brass Plug		25	ea.	\$ 3.538	26
25028NL	1" PEX No Lead Brass Plug		5	ea.	\$ 5.086	26
25035NL	1-¼" PEX No Lead Brass Plug		5	ea.	\$ 13.743	26
25041NL	1-½" PEX No Lead Brass Plug		5	ea.	\$ 61.454	26
25054NL	2" PEX No Lead Brass Plug		5	ea.	\$ 61.556	26
25751NL	½" PEX × ¾" O.D. No Lead Brass Adapter		5	ea.	\$ 5.382	22
26222NL	¾" × ¾" × ¾" PEX No Lead Brass Tee		25	ea.	\$ 8.468	24
26225NL	¾" × ¾" × ½" PEX No Lead Brass Tee		25	ea.	\$ 8.277	25
26252NL	¾" × ½" × ¾" PEX No Lead Brass Tee		25	ea.	\$ 8.480	25
26255NL	¾" × ½" × ½" PEX No Lead Brass Tee		25	ea.	\$ 8.260	25
26322NL	1-¼" × ¾" × ¾" PEX No Lead Brass Tee	Discontinued	5	ea.	\$ 26.330	
26332NL	1-¼" × 1-¼" × ¾" PEX No Lead Brass Tee		5	ea.	\$ 41.491	25
26333NL	1-¼" × 1-¼" × 1-¼" PEX No Lead Brass Tee		5	ea.	\$ 42.892	24
26335NL	1-¼" × 1-¼" × ½" PEX No Lead Brass Tee		5	ea.	\$ 34.091	25
26338NL	1-¼" × 1-¼" × 1" PEX No Lead Brass Tee		5	ea.	\$ 50.050	25
26382NL	1-¼" × 1" × ¾" PEX No Lead Brass Tee		5	ea.	\$ 39.555	25
26388NL	1-¼" × 1" × 1" PEX No Lead Brass Tee		5	ea.	\$ 45.765	25
26422NL	1-½" × ¾" × ¾" PEX No Lead Brass Tee	WSL	5	ea.	\$ 45.530	25
26432NL	1-½" × 1-¼" × ¾" PEX No Lead Brass Tee		5	ea.	\$ 69.775	25
26433NL	1-½" × 1-¼" × 1-¼" PEX No Lead Brass Tee	WSL	5	ea.	\$ 59.780	25
26442NL	1-½" × 1-½" × ¾" PEX No Lead Brass Tee		5	ea.	\$ 57.570	25
26443NL	1-½" × 1-½" × 1-¼" PEX No Lead Brass Tee	WSL	5	ea.	\$ 65.150	25
26444NL	1-½" × 1-½" × 1-½" PEX No Lead Brass Tee		5	ea.	\$ 88.620	24
26448NL	1-½" × 1-½" × 1" PEX No Lead Brass Tee		5	ea.	\$ 83.247	25

Stk#	Description	Status	Pkg Qty	Unit	List Price / Unit	Pg.
26488NL	1-1/2" x 1" x 1" PEX No Lead Brass Tee	WSL	5	ea.	\$ 77.234	25
26552NL	1/2" x 1/2" x 3/4" PEX No Lead Brass Tee		10	ea.	\$ 5.400	25
26555NL	1/2" x 1/2" x 1/2" PEX No Lead Brass Tee		25	ea.	\$ 5.310	24
26633NL	2" x 1-1/4" x 1-1/4" PEX No Lead Brass Tee		5	ea.	\$ 176.931	25
26642NL	2" x 1-1/2" x 3/4" PEX No Lead Brass Tee		5	ea.	\$ 131.613	25
26643NL	2" x 1-1/2" x 1-1/4" PEX No Lead Brass Tee		5	ea.	\$ 139.859	25
26644NL	2" x 1-1/2" x 1-1/2" PEX No Lead Brass Tee		5	ea.	\$ 154.210	25
26648NL	2" x 1-1/2" x 1" PEX No Lead Brass Tee		5	ea.	\$ 135.051	25
26662NL	2" x 2" x 3/4" PEX No Lead Brass Tee		5	ea.	\$ 132.491	25
26663NL	2" x 2" x 1-1/4" PEX No Lead Brass Tee		5	ea.	\$ 133.994	25
26664NL	2" x 2" x 1-1/2" PEX No Lead Brass Tee	WSL	5	ea.	\$ 151.165	25
26666NL	2" x 2" x 2" PEX No Lead Brass Tee		5	ea.	\$ 159.484	24
26668NL	2" x 2" x 1" PEX No Lead Brass Tee		5	ea.	\$ 129.715	25
26822NL	1" x 3/4" x 3/4" PEX No Lead Brass Tee		5	ea.	\$ 18.656	25
26882NL	1" x 1" x 3/4" PEX No Lead Brass Tee		5	ea.	\$ 20.268	25
26885NL	1" x 1" x 1/2" PEX No Lead Brass Tee		10	ea.	\$ 17.540	25
26888NL	1" x 1" x 1" PEX No Lead Brass Tee		10	ea.	\$ 18.106	24
27105NL	1/2" PEX x 1/2" M/Sweat No Lead Brass Adapter		25	ea.	\$ 3.538	23
27122NL	3/4" PEX x 3/4" M/Sweat No Lead Brass Adapter		25	ea.	\$ 6.380	23
27128NL	1" PEX x 1" M/Sweat No Lead Brass Adapter		10	ea.	\$ 11.708	23
27135NL	1-1/4" PEX x 1-1/4" M/Sweat No Lead Brass Adapter	WSL	5	ea.	\$ 22.080	23
27141NL	1-1/2" PEX x 1-1/2" M/Sweat No Lead Brass Adapter		5	ea.	\$ 73.052	23
27154NL	2" PEX x 2" M/Sweat No Lead Brass Adapter		5	ea.	\$ 86.723	23
27205NL	1/2" PEX x 1/2" F/Sweat No Lead Brass Adapter		25	ea.	\$ 3.886	23
27222NL	3/4" PEX x 3/4" F/Sweat No Lead Brass Adapter		25	ea.	\$ 6.955	23
27228NL	1" PEX x 1" F/Sweat No Lead Brass Adapter		10	ea.	\$ 16.825	23
27235NL	1-1/4" PEX x 1-1/4" F/Sweat No Lead Brass Adapter		5	ea.	\$ 25.409	23
27328NL	3/4" PEX x 1" F/Sweat No Lead Adapter		10	ea.	\$ 7.540	23
27505NL	1/2" PEX x 1/2" MNPT No Lead Brass Adapter		25	ea.	\$ 7.370	20
27522NL	3/4" PEX x 3/4" MNPT No Lead Brass Adapter		25	ea.	\$ 10.692	20
27525NL	3/4" PEX x 1/2" MNPT No Lead Brass Adapter	WSL	25	ea.	\$ 8.731	20
27528NL	1" PEX x 1" MNPT No Lead Brass Adapter		10	ea.	\$ 19.061	20
27535NL	1-1/4" PEX x 1-1/4" MNPT No Lead Brass Adapter		5	ea.	\$ 45.931	20
27538NL	1-1/4" PEX x 1" MNPT No Lead Brass Adapter		5	ea.	\$ 30.316	20
27541NL	1-1/2" PEX x 1-1/2" MNPT No Lead Brass Adapter		5	ea.	\$ 47.808	20
27552NL	1/2" PEX x 3/4" MNPT No Lead Brass Adapter		10	ea.	\$ 10.339	20
27554NL	2" PEX x 2" MNPT No Lead Brass Adapter		5	ea.	\$ 134.250	20
27582NL	1" PEX x 3/4" MNPT No Lead Brass Adapter		5	ea.	\$ 13.652	20
27605NL	1/2" PEX x 1/2" FNPT No Lead Brass Adapter		25	ea.	\$ 8.909	21
27622NL	3/4" PEX x 3/4" FNPT No Lead Brass Adapter		25	ea.	\$ 12.231	21
27628NL	1" PEX x 1" FNPT No Lead Brass Adapter	WSL	25	ea.	\$ 16.886	21
27632NL	1-1/4" PEX x 3/4" FNPT No Lead Brass Adapter		5	ea.	\$ 21.890	21
27635NL	1-1/4" PEX x 1-1/4" FNPT No Lead Brass Adapter		5	ea.	\$ 55.404	21
27638NL	1-1/4" PEX x 1" FNPT No Lead Brass Adapter		5	ea.	\$ 29.670	21
27641NL	1-1/2" PEX x 1-1/2" FNPT No Lead Brass Adapter		5	ea.	\$ 72.000	21
28005NL	1/2" x 1/2" PEX No Lead Brass Elbow		25	ea.	\$ 4.325	18
28022NL	3/4" x 3/4" PEX No Lead Brass Elbow		25	ea.	\$ 6.456	18
28028NL	1" x 1" PEX No Lead Brass Elbow		10	ea.	\$ 14.584	18
28035NL	1-1/4" x 1-1/4" PEX No Lead Brass Elbow		5	ea.	\$ 27.256	18
28041NL	1-1/2" x 1-1/2" PEX No Lead Brass Elbow		5	ea.	\$ 65.857	18
28054NL	2" x 2" PEX No Lead Brass Elbow	Discontinued	5	ea.	\$ 114.041	18

Stk#	Description	Status	Pkg Qty	Unit	List Price / Unit	Pg.
28205	½" PEX Barb Stubout Elbow with Edge Bracket		25	ea.	\$ 17.500	29
28206	½" PEX × Closed, 3-½" × 6" Stub-out Elbow		50	ea.	\$ 10.774	29
28225NL	¾" × ½" PEX No Lead Brass Elbow	WSL	10	ea.	\$ 5.280	18
28305NL	½" PEX × ½" FNPT Drop Ear No Lead Brass Elbow		10	ea.	\$ 17.836	21
28535NL	1-¼" PEX × 1-¼" MNPT No Lead Brass Elbow		5	ea.	\$ 58.990	19
29005NL	½" × ½" PEX No Lead Brass Coupling		25	ea.	\$ 3.112	16
29022NL	¾" × ¾" PEX No Lead Brass Coupling		25	ea.	\$ 4.070	16
29028NL	1" × 1" PEX No Lead Brass Coupling		10	ea.	\$ 6.639	16
29035NL	1-¼" × 1-¼" PEX No Lead Brass Coupling		5	ea.	\$ 13.750	16
29041NL	1-½" × 1-½" PEX No Lead Brass Coupling		5	ea.	\$ 47.011	16
29054NL	2" × 2" PEX No Lead Brass Coupling		5	ea.	\$ 67.882	16
29225NL	¾" × ½" PEX No Lead Brass Coupling		25	ea.	\$ 5.470	16
29238NL	1-¼" × 1" PEX No Lead Brass Coupling		5	ea.	\$ 14.433	16
29243NL	1-½" × 1-¼" PEX No Lead Brass Coupling		5	ea.	\$ 24.777	16
29248NL	1-½" × 1" PEX No Lead Brass Coupling		5	ea.	\$ 45.677	16
29263NL	2" × 1-¼" PEX No Lead Brass Coupling		5	ea.	\$ 62.992	16
29264NL	2" × 1-½" PEX No Lead Brass Coupling		5	ea.	\$ 66.364	16
29282NL	1" × ¾" PEX No Lead Brass Coupling		10	ea.	\$ 7.395	16
30071	Universal Sensor (10K)		1	ea.	\$ 91.13	78
30072	Slab Sensor (10K) PVC Sleeve 20ft Cable		1	ea.	\$ 308.78	78
30073	Slab Sensor (10K) PVC Sleeve 40ft Cable		1	ea.	\$ 526.99	78
30076	Indoor Sensor (10K) Small Enclosure	WSL	1	ea.	\$ 114.23	143
30077	Indoor Sensor (10K) Flush Mount	WSL	1	ea.	\$ 176.11	143
30079	Slab Sensor (10K) SS Sleeve 10ft Cable		1	ea.	\$ 110.88	78
30090	Snow/Ice Sensor (10K) 65 ft cable		1	ea.	\$ 2,139.17	78 , 128
30091	Snow/Ice Sensor Socket		1	ea.	\$ 486.17	78 , 128
30092	SnowMeltingKit-Start/StopModule w/Slab and UniversalSensor	WSL	1	ea.	\$ 1,372.61	143
31355	HeatLink® Compact Mixing Reset Control		1	ea.	\$ 1,156.89	77
31680	Snow Melt Control 680-BMS BACnet (30090,30091,Snow/Ice Sensor sold sep)		1	ea.	\$ 7,771.86	77
3WMIX	3-Way Mixing Panel 1-¼" 26-99 Pump		1	ea.	\$ 8,525.00	118
3WMIX-BMS	3-Way Mixing Panel 1-¼" 26-99 Pump BMS		1	ea.	\$ 6,973.00	118
3WMIX-SMCP	3-Way Mixing Panel 1-¼" 26-99 Pump Snow Melt		1	ea.	\$ 9,442.00	121
3WMIXHH	3-Way Mixing Panel 1-¼" 26-150 Pump		1	ea.	\$ 10,037.00	118
3WMIXHH-BMS	3-Way Mixing Panel 1-¼" 26-150 Pump BMS		1	ea.	\$ 9,183.00	118
3WMIXHH-SMCP	3-Way Mixing Panel 1-¼" 26-150 Pump Snow Melt		1	ea.	\$ 11,433.00	121
40226	StatLink® 6 Zone Base Module	Discontinued; see 40318	1	ea.	\$ 219.21	
40318	StatLink® 8 Zone Wired Module		1	ea.	\$ 270.11	76
40328	StatLink® 8 Zone Wireless Module		1	ea.	\$ 618.07	70
41316	6 Zone Pump Wiring Center		1	ea.	\$ 529.17	75
43301	Wireless Internet Gateway		1	ea.	\$ 429.11	69
43302	Wireless Relay		1	ea.	\$ 209.41	71
43303	Door/Window Sensor		1	ea.	\$ 140.71	72
43304	Wireless Smart Plug / Repeater		1	ea.	\$ 181.07	71
43305	External Antenna		1	ea.	\$ 89.27	72
43306	Co-ordinator		1	ea.	\$ 157.88	74
43307	Repeater		1	ea.	\$ 192.51	74
43310	Water Leak Sensor		1	ea.	\$ 125.87	73
43311	Inline Shutoff Valve		1	ea.	\$ 506.58	73
44325	StatLink® Installation Track, 25"		1	ea.	\$ 20.52	76
45032	8 Pin Round Socket for AC Relay	WSL	1	ea.	\$ 46.39	143
45112	HeatLink® 24Vac DPDT Pump Relay Box		1	ea.	\$ 280.84	75

Stk#	Description	Status	Pkg Qty	Unit	List Price / Unit	Pg.
45813	1A TimeDelay(SlowBlow)5×20mmGlassFuse for 461Thermostats	WSL	1	ea.	\$ 6.24	143
45822	2A Medium Lag (Med. Blow) 5×20mm Glass Fuse for 40190	WSL	1	pair	\$ 12.47	143
46645	HeatLink® Wired Digital Timer Thermostat		1	ea.	\$ 152.91	75
46801W	HeatLink® Wireless Digital Thermostat		1	ea.	\$ 214.99	69
4WMIX	4-Way Mixing Panel 1-¼" 26-99 Pump		1	ea.	\$ 8,525.00	119
4WMIX-BMS	4-Way Mixing Panel 1-¼" 26-99 Pump BMS		1	ea.	\$ 6,973.00	119
4WMIX-HH-SMCP-BAC	4-Way Mixing Panel 1-1/4" 26-150 Pump Snow Melt (requires OPT-SMP-680)		1	ea.	\$ 12,294.00	123
4WMIX-SMCP	4-Way Mixing Panel 1-¼" 26-99 Pump Snow Melt		1	ea.	\$ 9,442.00	122
4WMIX-SMCP-BAC	4-Way Mixing Panel 1-1/4" 26-99 Pump Snow Melt (requires OPT-SMP-680)		1	ea.	\$ 10,573.00	123
4WMIXHH	4-Way Mixing Panel 1-¼" 26-150 Pump		1	ea.	\$ 10,037.00	119
4WMIXHH-BMS	4-Way Mixing Panel 1-¼" 26-150 Pump BMS		1	ea.	\$ 9,183.00	119
4WMIXHH-SMCP	4-Way Mixing Panel 1-¼" 26-150 Pump Snow Melt		1	ea.	\$ 11,433.00	122
56081	Zone Valve Ring for 56201 and 56231 Actuator	WSL	1	ea.	\$ 2.92	143
56090	TwistSeal® Manifold Actuator Ring	WSL	1	ea.	\$ 6.12	143
56091	Valve Actuator Ring	WSL	1	ea.	\$ 6.38	143
56121	HeatLink® DDC Actuator for Manifolds and Valves		1	ea.	\$ 286.12	66
56200	HeatLink® TwistSeal® Manifold Actuator with LED		1	ea.	\$ 124.93	66
56201	HeatLink® Valve & SS Manifold Actuator with LED		1	ea.	\$ 109.32	66
56202	HeatLink® Multiport Manifold Actuator with LED		1	ea.	\$ 120.96	66
56230	HeatLink® TwistSeal® Manifold Actuator c/w End Switch		1	ea.	\$ 189.83	66
56231	HeatLink® Valve & SS Manifold Actuator c/w End Switch		1	ea.	\$ 170.19	66
56232	HeatLink® Multiport Manifold Actuator c/w End Switch		1	ea.	\$ 193.11	66
56401	Wireless Valve Actuator		1	ea.	\$ 266.00	70
57091	Thermostatic Head (16°-28°C)	WSL	1	ea.	\$ 88.63	61
57094	Thermostatic Head c/w Capillary (68°-158°F)		1	ea.	\$ 369.96	61
58052	Plastic MixingValve Motor Coupling for 1" - 2" 4-Way Valves	WSL	1	ea.	\$ 39.97	142
58130.1	Adapter for HeatLink 1"- 2" Rotary Actuator to WITA Valve		1	ea.	\$ 136.21	142
58131	Mixing Valve Motor for 1" to 2" FNPT Valves 3-Point Floating		1	ea.	\$ 838.69	62
58132	Mixing Valve Motor for 1" to 2" FNPT Valves DDC		1	ea.	\$ 1,140.42	62
58199	Mixing Valve Motor for 2-½" to 4" Flange Mixing Valves	WSL	1	ea.	\$ 582.98	143
58200	Mixing Valve Motor for 2" to 4" Flange Mixing Valves 3-Point Floating		1	ea.	\$ 1,447.17	64
58200.1	Metal Drive Sleeve for 58200/58300 Mixing Valve Motor	New	1	ea.	\$ 174.53	143
58300	Mixing Valve Motor for 2" to 4" Flange Mixing Valves DDC		1	ea.	\$ 2,584.39	64
58850	AccssryPack #58150 v2 Mounted on Black CastIronMixingVlv	WSL	1	ea.	\$ 49.66	142
58950	Accessory Pack for #58150 v1 (Rectangle, SM5)	WSL	1	ea.	\$ 46.88	142
60020V	Pressure Activated Bypass Valve ¾"		1	ea.	\$ 246.80	65
60025V	Pressure Activated Bypass Valve 1"		1	ea.	\$ 321.44	65
60040V	Pressure Activated Bypass Valve 1-¼"		1	ea.	\$ 424.79	65
62016V	Straight Zone Valve ½" NPT		1	ea.	\$ 113.14	60
62020V	Straight Zone Valve ¾" NPT		1	ea.	\$ 145.89	60
62025V	Straight Zone Valve 1" NPT		1	ea.	\$ 182.91	60
62030V	Straight Zone Valve 1-¼" NPT		1	ea.	\$ 335.64	60
62216	Straight Zone Valve ½" NPT, Nickel Plated	WSL	1	ea.	\$ 88.95	60
62220	Straight Zone Valve ¾" NPT, Nickel Plated	WSL	1	ea.	\$ 114.37	60
62325	Straight Balancing Valve 1" F/Sweat	WSL	1	ea.	\$ 196.84	65
62816	Zone Valve Insert ½" (Blue Cap)	WSL	1	ea.	\$ 92.60	142
62900V	Zone Valve Insert for 62000V Series Valves	New!	1	ea.	\$ 82.52	153
62916	Radiator Valve Insert ½" (Black Cap)	WSL	1	ea.	\$ 80.56	142
62920	Radiator Valve Insert ¾" (Black Cap)	WSL	1	ea.	\$ 100.48	142
62925	Zone Valve Insert 1" (Black Cap)	WSL	1	ea.	\$ 129.89	142
62930	Zone Valve Insert 1-¼" (Black Cap) and ¾" (Blue Cap)	WSL	1	ea.	\$ 139.69	142

Stk#	Description	Status	Pkg Qty	Unit	List Price / Unit	Pg.
63026	1" x 3-Way FNPT Mixing / Diverting Valve		1	ea.	\$ 501.94	62
63026.1	1" 3- & 4-Way Valve Shaft & Seal Kit		1	ea.	\$ 139.30	142
63539	1-1/4" x 3-Way FNPT Mixing / Diverting Valve		1	ea.	\$ 572.73	62
63541	1-1/2" x 3-Way FNPT Mixing / Diverting Valve		1	ea.	\$ 841.32	62
63542.1	1-1/4" and 1-1/2" 3- & 4-Way Valve Shaft & Seal Kit		1	ea.	\$ 121.90	142
63551	2" x 3-Way FNPT Mixing / Diverting Valve		1	ea.	\$ 1,003.13	62
63551.1	2" 3- & 4-Way Valve Shaft & Seal Kit		1	ea.	\$ 121.90	142
63716	1/2" Compact 3-Way Mixing Valve	WSL	1	ea.	\$ 293.35	59
63720V	3/4" Compact 3-Way Mixing Valve		1	ea.	\$ 512.62	59
63725V	1" Compact 3-Way Mixing Valve		1	ea.	\$ 656.47	59
63732	1-1/4" Compact 3-Way Mixing Valve	WSL	1	ea.	\$ 895.40	59
64026	1" x 4-Way FNPT Mixing Valve		1	ea.	\$ 538.85	62
64031	1-1/4" x 4-Way FNPT Mixing Valve		1	ea.	\$ 541.72	62
64041	1-1/2" x 4-Way FNPT Mixing Valve		1	ea.	\$ 866.93	62
64051	2" x 4-Way FNPT Mixing Valve		1	ea.	\$ 1,087.27	62
64164	2" x 4-Way Flange Mixing Valve		1	ea.	\$ 1,854.90	63
64164F	2" DIN Flange		1	ea.	\$ 88.60	63
64164G	2" Gasket for DIN Flange		1	ea.	\$ 27.68	63
64166	2-1/2" x 4-Way Flange Mixing Valve	WSL	1	ea.	\$ 2,275.56	63
64166F	2-1/2" DIN Flange	WSL	1	ea.	\$ 108.46	63
64166G	2-1/2" Gasket for DIN Flange	WSL	1	ea.	\$ 48.42	63
64181	3" x 4-Way Flange Mixing Valve	Discontinued	1	ea.	\$ 3,173.96	
64181F	3" DIN Flange	WSL	1	ea.	\$ 175.53	63
64181G	3" Gasket for DIN Flange	WSL	1	ea.	\$ 58.92	63
64931	Pressure Activated Bypass for Mixing Block 64331	WSL	1	ea.	\$ 138.51	142
64950	1-1/2" & 2" 4-Way Cast Iron Mixing Valve Repair Kit	WSL	1	ea.	\$ 461.16	142
65000	4" x 4-Way Flange Mixing Valve		1	ea.	\$ 4,147.75	63
65000F	4" DIN Flange		1	ea.	\$ 204.40	63
65000G	4" Gasket for DIN Flange		1	ea.	\$ 76.47	63
67005	1/2" PEX Comp. x 1/2" M/Sweat Adapter	Discontinued	1	ea.	\$ 14.27	
67019	3/8" PEX Comp. x 3/4" M/Sweat Adapter		1	ea.	\$ 29.38	58
67119	3/8" PEX Comp. x 3/4" F/Sweat Adapter		1	ea.	\$ 29.93	58
68012	3/8" PEX Comp. x 1/2" MNPT Adapter	WSL	1	ea.	\$ 16.93	141
68019	3/8" PEX Comp. x 3/4" MNPT Adapter		1	ea.	\$ 27.82	58
69005	1/2" x 1/2" PEX Comp. Coupling		1	ea.	\$ 46.22	58
69019	3/8" x 3/8" PEX Comp. Coupling		1	ea.	\$ 46.01	58
69022	3/4" x 3/4" PEX Comp. Coupling		1	ea.	\$ 65.39	58
71724	Recessed Manifold Housing 24"x23"x3-7/8"		1	ea.	\$ 624.82	57
71730	Recessed Manifold Housing 30"x23"x3-7/8"		1	ea.	\$ 690.10	57
71743	Recessed Manifold Housing 43-1/2"x23"x3-7/8"		1	ea.	\$ 804.32	57
71901	Key Lock for Manifold Housing Door		1	ea.	\$ 34.03	57
72401	Manifold Mounting Rails for Surface Mount Manifold Housings	WSL	1	ea.	\$ 63.02	57
72434	Surface Mounted Manifold Housing 34-1/2"x28-1/2"x5-7/8"		1	ea.	\$ 846.74	57
72442	Surface Mounted Manifold Housing 42-1/2"x28-1/2"x5-7/8"		1	ea.	\$ 996.65	57
72446	Surface Mounted Manifold Housing 46-1/2"x28-1/2"x5-7/8"		1	ea.	\$ 1,118.07	57
72469	Surface Mounted Manifold Housing 69"x28-1/2"x5-7/8"	Special Order*	1	ea.	\$ 1,739.86	57
72481	Surface Mounted Manifold Housing 85"x28-1/2"x5-7/8"	Special Order*	1	ea.	\$ 2,050.52	57
72493	Surface Mounted Manifold Housing 93"x28-1/2"x5-7/8"	Special Order*	1	ea.	\$ 2,302.85	57
76100	Coupling for SS Manifold		1	ea.	\$ 58.18	52
76101	Mounting Bracket for SS Manifold		1	ea.	\$ 54.02	140
76102	2 Loop SS Manifold with Flow Meters		1	ea.	\$ 621.41	51

Stk#	Description	Status	Pkg Qty	Unit	List Price / Unit	Pg.
76103	3 Loop SS Manifold with Flow Meters		1	ea.	\$ 717.15	51
76104	4 Loop SS Manifold with Flow Meters		1	ea.	\$ 860.42	51
76105	5 Loop SS Manifold with Flow Meters		1	ea.	\$ 989.54	51
76106	6 Loop SS Manifold with Flow Meters		1	ea.	\$ 1,100.00	51
76107	7 Loop SS Manifold with Flow Meters		1	ea.	\$ 1,219.62	51
76108	8 Loop SS Manifold with Flow Meters		1	ea.	\$ 1,362.49	51
76109	9 Loop SS Manifold with Flow Meters		1	ea.	\$ 1,541.73	51
76110	10 Loop SS Manifold with Flow Meters		1	ea.	\$ 1,720.99	51
76111	11 Loop SS Manifold with Flow Meters		1	ea.	\$ 1,875.91	51
76112	12 Loop SS Manifold with Flow Meters		1	ea.	\$ 2,031.53	51
76192	1" NPT Adapter for SS Manifold	WSL	1	ea.	\$ 56.17	140
76202	2 Loop High Flow SS Manifold		1	ea.	\$ 598.92	51
76203	3 Loop High Flow SS Manifold		1	ea.	\$ 682.91	51
76204	4 Loop High Flow SS Manifold		1	ea.	\$ 815.38	51
76205	5 Loop High Flow SS Manifold		1	ea.	\$ 932.59	51
76206	6 Loop High Flow SS Manifold		1	ea.	\$ 1,031.91	51
76207	7 Loop High Flow SS Manifold		1	ea.	\$ 1,140.50	51
76208	8 Loop High Flow SS Manifold		1	ea.	\$ 1,272.98	51
76209	9 Loop High Flow SS Manifold		1	ea.	\$ 1,438.98	51
76210	10 Loop High Flow SS Manifold		1	ea.	\$ 1,607.03	51
76211	11 Loop High Flow SS Manifold		1	ea.	\$ 1,752.15	51
76212	12 Loop High Flow SS Manifold		1	ea.	\$ 1,896.87	51
76600	Coupling for 2" SS Manifold		1	pair	\$ 221.24	55
76601	Loctite 55		1	ea.	\$ 108.39	55
76604	4 Loop 2" SS Manifold	WSL	1	ea.	\$ 1,177.36	54
76605	5 Loop 2" SS Manifold	WSL	1	ea.	\$ 1,340.74	54
76606	6 Loop 2" SS Manifold		1	ea.	\$ 2,201.14	54
76607	7 Loop 2" SS Manifold	WSL	1	ea.	\$ 1,693.64	54
76608	8 Loop 2" SS Manifold		1	ea.	\$ 2,687.97	54
76609	9 Loop 2" SS Manifold	WSL	1	ea.	\$ 2,047.19	54
76610	10 Loop 2" SS Manifold		1	ea.	\$ 3,244.65	54
76611	11 Loop 2" SS Manifold	WSL	1	ea.	\$ 2,331.28	54
76612	12 Loop 2" SS Manifold		1	ea.	\$ 3,679.38	54
76614	14 Loop 2" SS Manifold		1	ea.	\$ 3,813.46	54
76675	1" Cap and Washer for 2" SS Manifold		1	pair	\$ 53.67	55
76680	O-ring for 2" SS Manifold, Closed End, and Open End Adapters	WSL	1	ea.	\$ 5.42	141
76840	1-1/2" MNPT Assembly Kit for 2" SS Manifold		1	ea.	\$ 553.87	55
76850	2" MNPT Assembly Kit for 2" SS Manifold		1	ea.	\$ 531.96	55
76905	1/2" Plug for 1-1/4" SS Manifold		1	ea.	\$ 11.80	52
76911	Zone Valve Insert for 1-1/4" SS Manifold (Return)		1	ea.	\$ 39.29	140
76912	Balancing Valve Insert for High Flow SS Manifold (Supply)		1	ea.	\$ 29.89	140
76916	Flow Meter Valve Insert (0-1.5 USgpm Lock Nut) for 1-1/4" SS Mfd (Sup.)		1	ea.	\$ 70.33	141
76917	Flow Meter Valve Insert (0-6 L/min) for 1-1/4" SS Manifold (New Design)		1	ea.	\$ 68.45	141
76918	Connector Base for 1-1/4" SS Manifold (Flow Meter w/Lock Nut)		1	ea.	\$ 14.22	141
76919	Connector Base for 1-1/4" SS Manifold		1	ea.	\$ 14.30	141
76922	1" Ball Valve Set for 1-1/4" SS Manifold		1	set	\$ 311.27	141
76924	O-ring for 1-1/4" SS Manifold Coupling and End Connections	WSL	1	ea.	\$ 4.23	141
76925	Black Shut-off Cap for 1-1/4" SS Manifold		1	ea.	\$ 7.19	141
76930	Hose Bib for 1-1/4" SS Manifold		1	ea.	\$ 68.09	141
76932	Automatic Air Vent for 1-1/4" SS Manifold		1	ea.	\$ 53.63	53
76935	Side Mount Automatic Air Vent Set for 1-1/4" SS Manifold		1	ea.	\$ 130.07	53

Stk#	Description	Status	Pkg Qty	Unit	List Price / Unit	Pg.
76936	Pressure Bypass for 1-1/4" SS Manifold (requires 77105 & PEX)		1	ea.	\$ 391.90	141
76937	Pressure Bypass Kit for 1-1/4" SS Manifold		1	ea.	\$ 400.97	53
76940	Strap-on Thermometer		1	ea.	\$ 44.54	130
77005	1/2" PEX to TwistSeal® Manifold Connector		1	pair	\$ 25.38	49
77012	3/8" PEX to TwistSeal® Manifold Connector	WSL	1	pair	\$ 33.20	139
77019	5/8" PEX to TwistSeal® Manifold Connector		1	pair	\$ 33.89	49
77022	3/4" PEX to TwistSeal® Manifold Connector c/w Nut		1	pair	\$ 55.28	49
77100	Port Cap for 1-1/4" SS Manifold		1	pair	\$ 23.62	52
77105	1/2" PEX to 1-1/4" SS Manifold Connector		1	pair	\$ 31.55	52
77119	5/8" PEX to 1-1/4" SS Manifold Connector		1	pair	\$ 40.67	52
77122	3/4" PEX to 1-1/4" SS Manifold Connector		1	pair	\$ 78.82	52
77305	1/2" PEX Insert to 1-1/4" SS Manifold Connector		1	pair	\$ 32.56	52
77600	O-Ring for 2" Manifold PEX Connectors	WSL	1	ea.	\$ 1.75	55
77619	5/8" PEX to 2" SS Manifold Connector		1	pair	\$ 74.01	55
77622	3/4" PEX to 2" SS Manifold Connector		1	pair	\$ 77.42	55
77628	1" PEX to 2" SS Manifold Connector	Special Order*	1	pair	\$ 104.32	55
77729	O-ring for PEX to TwistSeal® Manifold Connector		10	ea.	\$ 1.53	139
77739	O-ring for PEX to 1-1/4" SS Manifold Connector	WSL	10	ea.	\$ 2.45	141
78200	TwistSeal® Mini Deluxe (40mm) Z.V. Supply & Balancing Return Module Pair		1	pair	\$ 161.91	48
78210	TwistSeal® Mini Deluxe (40mm) Zone Valve Supply Module		1	ea.	\$ 102.45	138
78211	TwistSeal® Mini Deluxe (40mm) Balancing Return Module		1	ea.	\$ 105.24	138
78221	TwistSeal® Mini (40mm) Zone Valve Replacement Cartridge c/w O-ring		1	ea.	\$ 50.45	138
78302	TwistSeal® Mini (40mm) 2-port Z.V. Supply & Flow Meter Return Module Pair		1	pair	\$ 254.97	48
78303	TwistSeal® Mini (40mm) 3-port Z.V. Supply & Flow Meter Return Module Pair		1	pair	\$ 382.42	48
78311	TwistSeal® Mini Z.V. Rplcmnt. Cartridge for Multiport Module		1	ea.	\$ 34.75	138
78312	TwistSeal® Mini Flow Meter Replacement Cartridge for 78300 Modules		1	ea.	\$ 64.45	138
78314	Assembly tool for TwistSeal® Mini Multiport Valves		1	ea.	\$ 16.35	133
78400	TwistSeal® Deluxe (55mm) Z.V. Supply & Balancing Return Module Pair		1	pair	\$ 208.20	45
78401	TwistSeal® Deluxe (55mm) Zone Valve Supply Module		1	ea.	\$ 151.82	138
78402	TwistSeal® Deluxe (55mm) Balancing Return Module		1	ea.	\$ 142.23	138
78411	TwistSeal® (55mm) Zone Valve Replacement Cartridge c/w O-ring		1	ea.	\$ 101.93	138
78811	TwistSeal® Mini (40mm) Z.V. Upgrade Asmbl.	WSL	1	ea.	\$ 83.67	139
78812	TwistSeal® Mini (40mm) Balance Valve Assembly	WSL	1	ea.	\$ 78.46	139
78902	Plastic Nut for TwistSeal® Manifold Modules		1	ea.	\$ 10.99	139
78904	Shut-off Cap TwistSeal® - Red	WSL	1	ea.	\$ 8.62	139
78905	TwistSeal® Zone Actuator Base (40mm & 55mm)	WSL	1	ea.	\$ 3.81	139
78906	Balancing Valve Cap with Clip for TwistSeal® Manifold	WSL	1	ea.	\$ 19.36	139
78911	TwistSeal® (55mm) Zone Valve Upgrade Assembly	WSL	1	ea.	\$ 100.37	138
78912	TwistSeal® (55mm) Balance Valve Assembly	WSL	1	ea.	\$ 77.97	138
78921	O-ring for TwistSeal® Valve Insert (40 & 55mm)	WSL	5	ea.	\$ 1.24	140
78922	O-ring for TwistSeal® Balancing Shaft - 6x2mm (Cone Side)	WSL	5	ea.	\$ 2.90	140
78923	O-ring for TwistSeal® Mini (40mm) & EasyFit™ Manifold Modules		5	ea.	\$ 3.22	139
78924	O-ring for TwistSeal® (55mm) Manifold Module		5	ea.	\$ 5.19	138
79200	1" TwistSeal® Mini (40mm) Deluxe Manifold Assembly Kit		1	ea.	\$ 257.27	47
79400	1" TwistSeal® (55mm) Deluxe Manifold Assembly Kit		1	ea.	\$ 567.92	45
79801	TwistSeal® Mini (40mm) Closed End Cap		1	ea.	\$ 12.57	139
79808	TwistSeal® Mini (40mm) Cross Tee c/w O-ring	WSL	1	ea.	\$ 32.90	139
79815	1" TwistSeal® Mini (40mm) Union Cross Tee End Connection		1	ea.	\$ 105.28	139
79892	TwistSeal® Multiport (40mm) Double Mounting Bracket		1	ea.	\$ 22.61	47
79901	TwistSeal® (55mm) Closed End Cap		1	ea.	\$ 17.81	138
79902	1" TwistSeal® (55mm) Supply End Connection		1	ea.	\$ 101.48	138

Stk#	Description	Status	Pkg Qty	Unit	List Price / Unit	Pg.
79908	TwistSeal® (55mm) Cross Tee		1	ea.	\$ 60.23	138
79911	½" Cross Tee Plug		1	ea.	\$ 4.51	140
79922	Multiwrench for Manifold Nut and Base		1	ea.	\$ 19.11	133
79930	Metal Hose Bib		1	ea.	\$ 105.33	140
79931	Manual Air Vent		1	ea.	\$ 15.57	140
79932	Metal Automatic Air Vent		1	ea.	\$ 86.85	140
79933	Manual Air Vent Key - 5mm Square, Blue		1	ea.	\$ 3.93	140
79934	Plastic Hose Bib		1	ea.	\$ 48.92	140
79935	Pressure Test Kit		1	ea.	\$ 330.06	130
79936	Plastic Automatic Air Vent		1	ea.	\$ 39.50	140
79940	Pair Thermometers c/w Well for TwistSeal® Manifolds		1	pair	\$ 156.03	140
79942	Pair Thermometers for TwistSeal® Mini Union Cross Tee End Connection		1	pair	\$ 67.88	139
79951	100g Bottle Non-toxic Silicone O-ring Lubricant		1	ea.	\$ 71.97	133
79952	10g Bottle Non-toxic Silicone O-ring Lubricant		1	ea.	\$ 14.89	133
79953	Red Rubber Gasket for 1" Union End Connection (40mm) Air Tests	WSL	1	pair	\$ 10.31	139
79954	Gasket for TwistSeal® Mini (40mm) 1" Union Supply End Connection		1	pair	\$ 9.85	139
79955	O-ring for ½" Cross Tee Accessories	WSL	5	ea.	\$ 0.93	140
79965	Pressure Test Kit with Extra Valve to Zero Gauge		1	ea.	\$ 379.51	130
79991	TwistSeal® (55mm) Mounting Bracket		1	ea.	\$ 27.52	45
86005	½" Conduit 90s		1	ea.	\$ 6.43	83
86020	¾" Conduit 90s		1	ea.	\$ 8.75	83
86022	¾" Conduit 90s		1	ea.	\$ 13.17	83
86028	1" Conduit 90s		1	ea.	\$ 16.23	83
86105	Plastic Bend Support for ¾" and ½" Tubing		1	ea.	\$ 1.98	83 , 129
86122	Plastic Bend Support for ¾" Tubing		1	ea.	\$ 4.12	83 , 129
86222	Metal Bend Support for ¾" Tubing	Discontinued	50	ea.	\$ 6.86	
86255	Metal Drop Ear Bend Support for ½" Tubing		25	ea.	\$ 8.28	129
87024	24" Aluminum Heat Transfer Plate for DryAbove™/DryBelow™ Systems		250	ea.	\$ 6.23	82
87205	EndBend™ for DryAbove™ System		25	ea.	\$ 8.57	82
87305	SpacerClip™ for DryAbove™ System		50	ea.	\$ 2.86	82
89000	Tubing Tracking		400	ft.	\$ 2.09	82
89010	500 Track Staples		1	bag	\$ 207.76	80
89105	1000 Tie Straps - 5.5"		1	bag	\$ 99.93	80
89107	1000 Tie Straps - 7.5"		1	bag	\$ 105.25	80
89244	300× 2-¾" (60mm) Staples for Stand-up Stapler		1	box	\$ 77.66	80 , 131
89251	300× 1-½" Staples for HeatLink® Deluxe Staple Gun		1	box	\$ 100.57	80 , 131
89252	300× 2" Staples for HeatLink® Deluxe Staple Gun		1	box	\$ 124.13	80 , 131
92128bs	1" 100ft Blue PureLink® Plus Pipe-in-Pipe		1	coil	\$ 631.900	11
92128rs	1" 100ft Red PureLink® Plus Pipe-in-Pipe		1	coil	\$ 631.900	11
92305bcs	1½" 300ft Blue Corrugated Sleeve for ½" PEX		1	ea.	\$ 226.500	11
92305bs	½" 300ft Blue PureLink® Plus Pipe-in-Pipe		1	coil	\$ 591.900	11
92305rs	½" 300ft Red PureLink® Plus Pipe-in-Pipe		1	coil	\$ 591.900	11
92322bcs	1-¾" 300ft Blue Corrugated Sleeve for ¾" PEX		1	ea.	\$ 388.200	11
92322bs	¾" 300ft Blue PureLink® Plus Pipe-in-Pipe		1	coil	\$ 1,043.100	11
92322rs	¾" 300ft Red PureLink® Plus Pipe-in-Pipe		1	coil	\$ 1,043.100	11
94019400	¾" 400ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing		1	coil	\$ 796.00	41
94105	½" 1000ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing		1	coil	\$ 1,459.00	41
94119	¾" 1000ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing		1	coil	\$ 1,990.00	41
94122	¾" 1000ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing		1	coil	\$ 2,527.00	41
94128	1" 100ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing		1	coil	\$ 449.70	41
94135	1-¼" 100ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing		1	coil	\$ 719.30	41

Stk#	Description	Status	Pkg Qty	Unit	List Price / Unit	Pg.
94141	1-1/2" 100ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing		1	coil	\$ 997.90	41
94205	1/2" 250ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing		1	coil	\$ 364.75	41
94222	3/4" 10x20ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing		1	bundle	\$ 505.40	42
94228	1" 5x20ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing		1	bundle	\$ 449.70	42
94235	1-1/4" 5x20ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing		1	bundle	\$ 719.30	42
94241	1-1/2" 5x20ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing		1	bundle	\$ 997.90	42
94305	1/2" 300ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing		1	coil	\$ 437.70	41
94305rs	1/2" 300' O ₂ Barrier HeatLink® Pipe-in-Pipe Red Sheath	Special Order*	1	coil	\$ 681.60	42
94319	5/8" 300ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing	WSL	1	coil	\$ 597.00	41
94322	3/4" 300ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing		1	coil	\$ 758.10	41
94322rs	3/4" 300' O ₂ Barrier HeatLink® Pipe-in-Pipe Red Sheath	Special Order*	1	coil	\$ 1,153.50	42
94335	1-1/4" 300ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing		1	coil	\$ 2,157.90	41
94341	1-1/2" 300ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing		1	coil	\$ 2,993.70	41
94505	1/2" 500ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing		1	coil	\$ 729.50	41
94519	5/8" 500ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing		1	coil	\$ 995.00	41
94522	3/4" 500ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing		1	coil	\$ 1,263.50	41
94528	1" 500ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing		1	coil	\$ 2,248.50	41
BC G2-1	Standard Boiler Panel 3 Pump		1	ea.	\$ 4,244.00	93
BC G2-2	High Capacity Boiler Panel 4 Pump		1	ea.	\$ 5,031.00	93
BC G2-3	BC G.Combi Boiler Panel		1	ea.	\$ 4,471.00	93
CAD01	CAD Boiler Panel 3 Pump		1	ea.	\$ 4,040.00	90
CAD02	CAD Boiler Panel High Capacity 4 Pump		1	ea.	\$ 4,656.00	90
CHVLV20	Check Valve for UPS15-58 Pump		1	ea.	\$ 42.29	146
DRVWSNS-SS	Driveway Sensor for SMP Panels		1	ea.	\$ 2,161.33	79 , 128
ECO1ZN3P	ECO Boiler Panel 3 Pump		1	ea.	\$ 4,040.00	88
ECO2ZN4P	ECO Boiler Panel High Capacity 4 Pump		1	ea.	\$ 4,656.00	88
ELBP18	Electric Boiler Panel 18,000BTU		1	ea.	\$ 4,639.00	94
ELBP18TS3	Electric Boiler Panel 18,000BTU with 3 Loop Twist Seal Mini Multiport		1	ea.	\$ 5,549.00	95
ELBP18TS5	Electric Boiler Panel 18,000BTU with 5 Loop Twist Seal Mini Multiport		1	ea.	\$ 5,759.00	95
ELBP30	Electric Boiler Panel 30,000BTU		1	ea.	\$ 8,170.00	94
ELBP30TS3	Electric Boiler Panel 30,000BTU with 3 Loop Twist Seal Mini Multiport		1	ea.	\$ 8,679.00	95
ELBP30TS5	Electric Boiler Panel 30,000BTU with 5 Loop Twist Seal Mini Multiport		1	ea.	\$ 8,734.00	95
ELBP30TS6	Electric Boiler Panel 30,000BTU with 6 Loop Twist Seal Mini Multiport		1	ea.	\$ 8,995.00	95
ELBP30TS7	Electric Boiler Panel 30,000BTU with 7 Loop Twist Seal Mini Multiport		1	ea.	\$ 9,103.00	95
ELBP30TS8	Electric Boiler Panel 30,000BTU with 8 Loop Twist Seal Mini Multiport		1	ea.	\$ 9,213.00	95
ELBP50	Electric Boiler Panel 50,000BTU		1	ea.	\$ 8,346.00	94
ELBP50TS7	Electric Boiler Panel 50,000BTU with 7 Loop Twist Seal Mini Multiport		1	ea.	\$ 9,690.00	95
ETF-144/99A	Slab Sensor (12k) PVC Sleeve 8ft Cable for ETO2SMCNTR SnowmeltController		1	ea.	\$ 192.01	79 , 128
ETF-1733/44/55	Optional Outdoor Sensor for SMCP & SMP Panels		1	ea.	\$ 396.75	79 , 128
ETF1899ASNS	Sensor NTC 12K (Spare parts for #SMCP)	Special Order*	1	ea.	\$ 174.22	143
EX13203	3 Port, 3/4" PEX F1960 x Closed End HPP Multiport Tee		5	ea.	\$ 17.319	32
EX13204	4 Port, 3/4" PEX F1960 x Closed End HPP Multiport Tee		5	ea.	\$ 24.619	32
EX13206	6 Port, 3/4" PEX F1960 x Closed End HPP Multiport Tee		5	ea.	\$ 30.293	32
EX13806	6 Port, 1" PEX F1960 x Closed End HPP Multiport Tee		5	ea.	\$ 71.725	32
EX14202	2 Port, 3/4" x 3/4" PEX F1960 Flow Through HPP Multiport Tee		5	ea.	\$ 14.828	32
EX14203	3 Port, 3/4" x 3/4" PEX F1960 Flow Through HPP Multiport Tee		5	ea.	\$ 20.106	32
EX14204	4 Port, 3/4" x 3/4" PEX F1960 Flow Through HPP Multiport Tee		5	ea.	\$ 25.052	32
EX14706	6 Port, 1" x 3/4" PEX F1960 Flow Through HPP Multiport Tee		5	ea.	\$ 71.606	32
EX15005	1/2" PEX F1960 HPP Plug		25	ea.	\$ 2.357	31
EX15022	3/4" PEX F1960 HPP Plug		25	ea.	\$ 3.805	31
EX15028	1" PEX F1960 HPP Plug		5	ea.	\$ 5.059	31

Stk#	Description	Status	Pkg Qty	Unit	List Price / Unit	Pg.
EX15035	1-1/4" PEX F1960 HPP Plug		1	ea.	\$ 23.819	31
EX15041	1-1/2" PEX F1960 HPP Plug		1	ea.	\$ 36.674	31
EX15054	2" PEX F1960 HPP Plug		1	ea.	\$ 41.746	31
EX16222	3/4" x 3/4" x 3/4" PEX F1960 HPP Tee		25	ea.	\$ 6.074	38
EX16225	3/4" x 3/4" x 1/2" PEX F1960 HPP Tee		25	ea.	\$ 5.079	39
EX16252	3/4" x 1/2" x 3/4" PEX F1960 HPP Tee		25	ea.	\$ 5.959	39
EX16255	3/4" x 1/2" x 1/2" PEX F1960 HPP Tee		25	ea.	\$ 5.753	39
EX16332	1-1/4" x 1-1/4" x 3/4" PEX F1960 HPP Tee		1	ea.	\$ 23.216	39
EX16333	1-1/4" x 1-1/4" x 1-1/4" PEX F1960 HPP Tee		1	ea.	\$ 24.944	38
EX16335	1-1/4" x 1-1/4" x 1/2" PEX F1960 HPP Tee		1	ea.	\$ 17.905	39
EX16338	1-1/4" x 1-1/4" x 1" PEX F1960 HPP Tee		1	ea.	\$ 23.827	39
EX16382	1-1/4" x 1" x 3/4" PEX F1960 HPP Tee		1	ea.	\$ 19.757	39
EX16388	1-1/4" x 1" x 1" PEX F1960 HPP Tee		1	ea.	\$ 23.389	39
EX16432	1-1/2" x 1-1/4" x 3/4" PEX F1960 HPP Tee		1	ea.	\$ 33.310	39
EX16433	1-1/2" x 1-1/4" x 1-1/4" PEX F1960 HPP Tee		1	ea.	\$ 36.851	39
EX16438	1-1/2" x 1-1/4" x 1" PEX F1960 HPP Tee		1	ea.	\$ 34.579	39
EX16442	1-1/2" x 1-1/2" x 3/4" PEX F1960 HPP Tee		1	ea.	\$ 30.934	39
EX16443	1-1/2" x 1-1/2" x 1-1/4" PEX F1960 HPP Tee		1	ea.	\$ 33.418	39
EX16444	1-1/2" x 1-1/2" x 1-1/2" PEX F1960 HPP Tee		1	ea.	\$ 36.779	38
EX16448	1-1/2" x 1-1/2" x 1" PEX F1960 HPP Tee		1	ea.	\$ 31.907	39
EX16488	1-1/2" x 1" x 1" PEX F1960 HPP Tee		1	ea.	\$ 29.466	39
EX16552	1/2" x 1/2" x 3/4" PEX F1960 HPP Tee		25	ea.	\$ 13.869	39
EX16555	1/2" x 1/2" x 1/2" PEX F1960 HPP Tee		25	ea.	\$ 3.812	38
EX16642	2" x 1-1/2" x 3/4" PEX F1960 HPP Tee		1	ea.	\$ 108.482	39
EX16643	2" x 1-1/2" x 1-1/4" PEX F1960 HPP Tee		1	ea.	\$ 113.302	39
EX16644	2" x 1-1/2" x 1-1/2" PEX F1960 HPP Tee		1	ea.	\$ 124.112	39
EX16648	2" x 1-1/2" x 1" PEX F1960 HPP Tee		1	ea.	\$ 99.327	39
EX16662	2" x 2" x 3/4" PEX F1960 HPP Tee		1	ea.	\$ 108.125	39
EX16663	2" x 2" x 1-1/4" PEX F1960 HPP Tee		1	ea.	\$ 112.690	39
EX16664	2" x 2" x 1-1/2" PEX F1960 HPP Tee		1	ea.	\$ 128.727	39
EX16666	2" x 2" x 2" PEX F1960 HPP Tee		1	ea.	\$ 130.423	38
EX16668	2" x 2" x 1" PEX F1960 HPP Tee		1	ea.	\$ 107.628	39
EX16822	1" x 3/4" x 3/4" PEX F1960 HPP Tee		5	ea.	\$ 9.859	39
EX16828	1" x 3/4" x 1" PEX F1960 HPP Tee		5	ea.	\$ 11.635	39
EX16882	1" x 1" x 3/4" PEX F1960 HPP Tee		5	ea.	\$ 11.198	39
EX16885	1" x 1" x 1/2" PEX F1960 HPP Tee		10	ea.	\$ 10.284	39
EX16888	1" x 1" x 1" PEX F1960 HPP Tee		10	ea.	\$ 11.131	38
EX17505	1/2" PEX F1960 x 1/2" MNPT HPP Adapter		25	ea.	\$ 3.240	35
EX17522	3/4" PEX F1960 x 3/4" MNPT HPP Adapter		25	ea.	\$ 5.372	35
EX17552	1/2" PEX F1960 x 3/4" MNPT HPP Adapter		25	ea.	\$ 4.156	35
EX17755	1/2" PEX F1960 x 1/2" Swivel HPP Adapter		25	ea.	\$ 5.928	36
EX18005	1/2" x 1/2" PEX F1960 HPP Elbow		25	ea.	\$ 3.745	34
EX18022	3/4" x 3/4" PEX F1960 HPP Elbow		25	ea.	\$ 4.760	34
EX18028	1" x 1" PEX F1960 HPP Elbow		10	ea.	\$ 9.971	34
EX18035	1-1/4" x 1-1/4" PEX F1960 HPP Elbow		1	ea.	\$ 22.218	34
EX18041	1-1/2" x 1-1/2" PEX F1960 HPP Elbow		1	ea.	\$ 29.700	34
EX18054	2" x 2" PEX F1960 HPP Elbow		1	ea.	\$ 108.119	34
EX19005	1/2" x 1/2" PEX F1960 HPP Coupling		25	ea.	\$ 3.151	33
EX19022	3/4" x 3/4" PEX F1960 HPP Coupling		25	ea.	\$ 3.861	33
EX19028	1" x 1" PEX F1960 HPP Coupling		10	ea.	\$ 6.204	33
EX19035	1-1/4" x 1-1/4" PEX F1960 HPP Coupling		1	ea.	\$ 14.718	33

Stk#	Description	Status	Pkg Qty	Unit	List Price / Unit	Pg.
EX19041	1-1/2" x 1-1/2" PEX F1960 HPP Coupling		1	ea.	\$ 16.149	33
EX19054	2" x 2" PEX F1960 HPP Coupling		1	ea.	\$ 74.159	33
EX19225	3/4" x 1/2" PEX F1960 HPP Coupling		25	ea.	\$ 6.179	33
EX19238	1-1/4" x 1" PEX F1960 HPP Coupling		1	ea.	\$ 12.986	33
EX19243	1-1/2" x 1-1/4" PEX F1960 HPP Coupling		1	ea.	\$ 15.911	33
EX19248	1-1/2" x 1" PEX F1960 HPP Coupling		1	ea.	\$ 15.938	33
EX19264	2" x 1-1/2" PEX F1960 HPP Coupling		1	ea.	\$ 60.083	33
EX19282	1" x 3/4" PEX F1960 HPP Coupling		5	ea.	\$ 9.419	33
EX23305NL	1/2" PEX F1960 No Lead Brass Ball Valve, Full Port	New!	10	ea.	\$ 15.320	40
EX23322NL	3/4" PEX F1960 No Lead Brass Ball Valve, Full Port	New!	10	ea.	\$ 24.220	40
EX23328NL	1" PEX F1960 No Lead Brass Ball Valve, Full Port	New!	6	ea.	\$ 40.340	40
EX23335NL	1-1/4" PEX F1960 No Lead Brass Ball Valve, Full Port	New!	4	ea.	\$ 64.660	40
EX23341NL	1-1/2" PEX F1960 No Lead Brass Ball Valve, Full Port	New!	2	ea.	\$ 89.540	40
EX23354NL	2" PEX F1960 No Lead Brass Ball Valve, Full Port	New!	2	ea.	\$ 168.180	40
EX23822NL	3/4" PEX F1960 x 3/4" MNPT No Lead Brass Ball Valve	New!	10	ea.	\$ 25.850	40
EX24205	1/2" PEX F1960 Expansion Ring		100	ea.	\$ 0.544	31
EX24222	3/4" PEX F1960 Expansion Ring		50	ea.	\$ 1.085	31
EX24228	1" PEX F1960 Expansion Ring		50	ea.	\$ 2.285	31
EX24235	1-1/4" PEX F1960 Expansion Ring		10	ea.	\$ 2.671	31
EX24241	1-1/2" PEX F1960 Expansion Ring		10	ea.	\$ 3.482	31
EX24250	2" PEX F1960 Expansion Ring		5	ea.	\$ 7.099	31
EX26222NL	3/4" x 3/4" x 3/4" PEX F1960 No Lead Brass Tee		25	ea.	\$ 27.372	38
EX26225NL	3/4" x 3/4" x 1/2" PEX F1960 No Lead Brass Tee		25	ea.	\$ 27.275	38
EX26252NL	3/4" x 1/2" x 3/4" PEX F1960 No Lead Brass Tee		25	ea.	\$ 22.958	38
EX26255NL	3/4" x 1/2" x 1/2" PEX F1960 No Lead Brass Tee		25	ea.	\$ 23.253	38
EX26555NL	1/2" x 1/2" x 1/2" PEX F1960 No Lead Brass Tee		25	ea.	\$ 16.654	38
EX26822NL	1" x 3/4" x 3/4" PEX F1960 No Lead Brass Tee		5	ea.	\$ 49.645	38
EX26882NL	1" x 1" x 3/4" PEX F1960 No Lead Brass Tee		5	ea.	\$ 50.512	38
EX26885NL	1" x 1" x 1/2" PEX F1960 No Lead Brass Tee		10	ea.	\$ 49.453	38
EX26888NL	1" x 1" x 1" PEX F1960 No Lead Brass Tee		10	ea.	\$ 47.207	38
EX27105NL	1/2" PEX F1960 x 1/2" M/Sweat No Lead Brass Adapter		25	ea.	\$ 6.126	37
EX27122NL	3/4" PEX F1960 x 3/4" M/Sweat No Lead Brass Adapter		25	ea.	\$ 13.407	37
EX27128NL	1" PEX F1960 x 1" M/Sweat No Lead Brass Adapter		10	ea.	\$ 25.909	37
EX27135NL	1-1/4" PEX F1960 x 1-1/4" M/Sweat No Lead Brass Adapter		5	ea.	\$ 54.483	37
EX27141NL	1-1/2" PEX F1960 x 1-1/2" M/Sweat No Lead Brass Adapter		5	ea.	\$ 89.544	37
EX27154NL	2" PEX F1960 x 2" M/Sweat No Lead Brass Adapter		5	ea.	\$ 247.828	37
EX27205NL	1/2" PEX F1960 x 1/2" F/Sweat No Lead Brass Adapter		25	ea.	\$ 6.261	37
EX27222NL	3/4" PEX F1960 x 3/4" F/Sweat No Lead Brass Adapter		25	ea.	\$ 14.250	37
EX27228NL	1" PEX F1960 x 1" F/Sweat No Lead Brass Adapter		10	ea.	\$ 23.732	37
EX27235NL	1-1/4" PEX F1960 x 1-1/4" F/Sweat No Lead Brass Adapter		5	ea.	\$ 64.761	37
EX27241NL	1-1/4" PEX F1960 x 1-1/4" F/Sweat No Lead Brass Adapter	New!	5	ea.	\$ 99.230	37
EX27254NL	2" PEX F1960 x 2" F/Sweat No Lead Brass Adapter	New!	5	ea.	\$ 263.330	37
EX27505NL	1/2" PEX F1960 x 1/2" MNPT No Lead Brass Adapter		25	ea.	\$ 9.033	35
EX27522NL	3/4" PEX F1960 x 3/4" MNPT No Lead Brass Adapter		25	ea.	\$ 16.243	35
EX27528NL	1" PEX F1960 x 1" MNPT No Lead Brass Adapter		10	ea.	\$ 33.186	35
EX27535NL	1-1/4" PEX F1960 x 1-1/4" MNPT No Lead Brass Adapter		5	ea.	\$ 72.202	35
EX27541NL	1-1/2" PEX F1960 x 1-1/2" MNPT No Lead Brass Adapter		5	ea.	\$ 97.385	35
EX27554NL	2" PEX F1960 x 2" MNPT No Lead Brass Adapter		5	ea.	\$ 284.296	35
EX27605NL	1/2" PEX F1960 x 1/2" FNPT No Lead Brass Adapter		25	ea.	\$ 17.573	36
EX27622NL	3/4" PEX F1960 x 3/4" FNPT No Lead Brass Adapter		25	ea.	\$ 20.376	36
EX27628NL	1" PEX F1960 x 1" FNPT No Lead Brass Adapter		25	ea.	\$ 42.925	36

Stk#	Description	Status	Pkg Qty	Unit	List Price / Unit	Pg.
EX27635NL	1-1/4" PEX F1960 × 1-1/4" FNPT No Lead Brass Adapter		5	ea.	\$ 77.912	36
EX27641NL	1-1/2" PEX F1960 × 1-1/2" FNPT No Lead Brass Adapter		5	ea.	\$ 157.609	36
EX28005NL	1/2" × 1/2" PEX F1960 No Lead Brass Elbow		25	ea.	\$ 11.580	34
EX28022NL	3/4" × 3/4" PEX F1960 No Lead Brass Elbow		25	ea.	\$ 19.529	34
EX28028NL	1" × 1" PEX F1960 No Lead Brass Elbow		10	ea.	\$ 30.830	34
EX28305NL	1/2" PEX F1960 × 1/2" FNPT Drop Ear No Lead Brass Elbow		10	ea.	\$ 23.568	36
EX29005NL	1/2" × 1/2" PEX F1960 No Lead Brass Coupling		25	ea.	\$ 9.576	33
EX29022NL	3/4" × 3/4" PEX F1960 No Lead Brass Coupling		25	ea.	\$ 14.802	33
EX29028NL	1" × 1" PEX F1960 No Lead Brass Coupling		10	ea.	\$ 27.752	33
EX29225NL	3/4" × 1/2" PEX F1960 No Lead Brass Coupling		25	ea.	\$ 12.912	33
EX29282NL	1" × 3/4" PEX F1960 No Lead Brass Coupling		10	ea.	\$ 22.848	33
FLWSWTCH	Flow Switch for Domestic Hot Water Priority		1	ea.	\$ 296.79	102
HEP025P	HEP 25MBH Isolation Heat Exchanger Panel		1	ea.	\$ 5,557.00	104
HEP025R	HEP 25MBH Isolation Heat Exchanger Panel Lite		1	ea.	\$ 4,058.00	105
HEP025RT	HEP 25MBH Isolation Heat Exchanger Panel Lite w/Timer		1	ea.	\$ 4,271.00	106
HEP025RTDP	HEP 25MBH Isolation Heat Exchanger Panel Dual Pump w/Timer		1	ea.	\$ 5,263.00	106
HEP080P	HEP 80MBH Isolation Heat Exchanger Panel		1	ea.	\$ 6,040.00	104
HEP080RT	HEP 80MBH Isolation Heat Exchanger Panel Lite w/Timer		1	ea.	\$ 4,537.00	106
HEP080RTDP	HEP 80MBH Isolation Heat Exchanger Panel Dual Pump w/Timer		1	ea.	\$ 5,710.00	106
HEP095P	HEP 95MBH Isolation Heat Exchanger Panel		1	ea.	\$ 8,310.00	104
Knight01	Panel for Knight Wall Mount Boiler (3 Pump)		1	ea.	\$ 4,040.00	91
Knight02	Panel for Knight Wall Mount Boiler (4 Pump)		1	ea.	\$ 4,656.00	91
NTRWSH1	1" x 3mm Blk Nitrile Washer for Panels		5	ea.	\$ 5.95	145
NTRWSH1-SRV	1" x 1.5mm Blk Nitrile (replacement washers Pre-2014 Panels)		5	ea.	\$ 5.22	145
NTRWSH34	3/4" x 3mm Blk Nitrile Washer for Panels		5	ea.	\$ 3.03	145
NTRWSH34-SRV	3/4" x 1.5mm Blk Nitrile (replacement washers Pre-2014 Panels)		5	ea.	\$ 2.64	145
OPT-SMP-680	Optional SMP Control Upgrade to BMS 680 BACnet (30090,30091 Sold Sep.)		1	ea.	\$ 5,767.00	128
PC2319CVR	Powder Coated Cover 23"x19" for HEP025/80R/T/DP,3WMIX,4WMIX		1	ea.	\$ 350.83	105
PLC1R2	Controller for TMP040/070, SMP, ZMP, ELB and old SSP/SST		1	ea.	\$ 1,195.81	145
PLC4AR2	Controller for TMP085DP, TMP200DT		1	ea.	\$ 1,252.46	145
PLC5R2	Controller for TWH070Z using FLWSWTCH		1	ea.	\$ 1,823.59	145
PLC6R2P3	Controller for CDP Panels with 3 Pumps		1	ea.	\$ 1,382.76	145
PLC6R2P4	Controller for CDP Panels with 4 Pumps		1	ea.	\$ 1,742.31	145
PLC7R1P1	Controller for WHP using HEPPS		1	ea.	\$ 1,408.13	145
PLC7R1P2	Controller for HEP using HEPPS		1	ea.	\$ 1,408.13	145
PLC7R1P2-TWH	Controller for TWH (except for Z models) using HEPPS		1	ea.	\$ 1,436.82	145
PLC7R2P1	Controller for WHP using FLWSWTCH		1	ea.	\$ 1,195.21	145
PLC7R2P2	Controller for HEP, TWH (except Z) using FLWSWTCH		1	ea.	\$ 1,195.78	145
PLINTR20VA	24Vac 20VA Plug-In Transformer for Panels	Discontinued; see PLINTR40VA	1	ea.	\$ 191.50	
PLINTR40VA	24Vac 40VA Plug-In Transformer for Panels		1	ea.	\$ 227.30	74, 146
PUMP1558	UPS15-58RU Composite 115V Pump		1	ea.	\$ 659.32	146
PUMP2699	UPS26-99FC 115V Cast Iron Pump		1	ea.	\$ 1,561.54	146
PUMP2699BR	UPS26-99BFC 115V Bronze Pump		1	ea.	\$ 2,502.98	146
PWRB2TH	Power Box 2-Terminal Header	WSL	5	ea.	\$ 11.81	145
PWRB3TH	Power Box 3-Terminal Header	WSL	5	ea.	\$ 17.82	146
SMCP	Snowmelt Control c/w ETO2 DDC and 2 Strap On Sensors		1	ea.	\$ 2,516.51	79
SMP175SS-HEX	SMP 175MBH SS Snow Melt Panel 2×20 HEX (DRVWSNS-SS sold sep)		1	ea.	\$ 18,575.00	125
SMP300SS-HEX	SMP 300MBH SS Snow Melt Panel 2×30 HEX (DRVWSNS-SS sold sep)		1	ea.	\$ 18,878.00	125
SMP300SS-HEX-H	SMP 365MBH SS Snow Melt Panel 3×30 HEX & HH Pump (DRVWSNS-SS sold sep)		1	ea.	\$ 21,147.00	125
SMP335	SMP 335MBH Copper Snow Melt Panel 4×20 Plate HEX (DRVWSNS-SS sold sep)		1	ea.	\$ 40,900.00	127

Stk#	Description	Status	Pkg Qty	Unit	List Price / Unit	Pg.
SMP375SS	SMP 300MBH SS Snow Melt Panel (No HEX; DRVWSNS-SS sold sep)		1	ea.	\$ 14,696.00	124
SMP375SSH	SMP 375MBH SS Snow Melt Panel with HH Pump (No HEX; DRVWSNS-SS sold sep)		1	ea.	\$ 15,877.00	124
SMP400D	SMP 400MBH Copper Snow Melt Panel (No HEX; DRVWSNS-SS sold sep)		1	ea.	\$ 31,859.00	126
SMP425	SMP 425MBH Copper Snow Melt Panel 4x30 Plate HEX (DRVWSNS-SS sold sep)		1	ea.	\$ 41,733.00	127
SSAACT	Actuator Mounted on Manifold and Wired to StatLink® in SSP/SST Panel		1	ea.	\$ 190.00	116
SSAAV	Installed Side Mount Auto Air Vent 76935 on Manifold in SSP/SST Panel		1	ea.	\$ 190.00	116
SSABMS	Installed Wiring for BMS in SSP/SST Panel		1	ea.	\$ 246.00	116
SSACST	Installed Closely Spaced Tees in SSP Panel		1	ea.	\$ 238.00	117
SSADDC	Installed DDC Actuator 56121 on Mixing Valve in SSTS Panel		1	ea.	\$ 386.00	116
SSAEXE10	Upgrade SSP/SST Surface Mount Housing to Extended 8/10 Loop		1	ea.	\$ 979.00	116
SSAEXE6	Upgrade SSP/SST Surface Mount Housing to Extended 4/6 Loop		1	ea.	\$ 790.00	116
SSAIZV	SSP Panel Auto Isolation Zone Valve		1	ea.	\$ 435.00	117
SSAMRC	Installed Outdoor Reset Control 31355 in SST Panel		1	ea.	\$ 1,298.00	116
SSAMXM	Installed Floating Action Mixing Valve Motor 58131 in SSTL Panel		1	ea.	\$ 1,271.00	116
SSAMXDDC	Installed DDC Mixing Valve Motor 58132 in SSTL Panel		1	ea.	\$ 1,382.00	116
SSAPB	Installed Pressure Bypass 76937 on Manifold in SSP/SST Panel		1	ea.	\$ 775.00	116
SSASL	Installed StatLink® Module 40318 in SSP/SST Panel		1	ea.	\$ 694.00	116
SSASM	Installed Snow Melt Control SMCP in SST Panel (DRVWSNS-SS sold sep)		1	ea.	\$ 3,018.00	116
SSASMBAC	Installed Snow Melt Control 31680 for SST (30090/91 sold sep)		1	ea.	\$ 11,524.00	116
SSASSE10	Upgrade SSP/SST Surface Mount Housing to Stainless Steel 8/10 Loop		1	ea.	\$ 3,141.00	116
SSASSE12	Upgrade SSP/SST Surface Mount Housing to Stainless Steel 12 Loop		1	ea.	\$ 3,568.00	116
SSASSE6	Upgrade SSP/SST Surface Mount Housing to Stainless Steel 4/6 Loop		1	ea.	\$ 3,023.00	116
SSATH	Installed Thermostatic Head 57094 on Mixing Valve in SSTS Panel		1	ea.	\$ 728.00	116
SSPLR104B	SSP Recessed 4 Loop 1-1/4" SS Man. Large Pump Panel Bot. feed		1	ea.	\$ 5,080.00	110
SSPLR104T	SSP Recessed 4 Loop 1-1/4" SS Man. Large Pump Panel Top feed		1	ea.	\$ 5,080.00	110
SSPLR106B	SSP Recessed 6 Loop 1-1/4" SS Man. Large Pump Panel Bot. Feed		1	ea.	\$ 5,251.00	110
SSPLR106T	SSP Recessed 6 Loop 1-1/4" SS Man. Large Pump Panel Top Feed		1	ea.	\$ 5,251.00	110
SSPLR108B	SSP Recessed 8 Loop 1-1/4" SS Man. Large Pump Panel Bot. Feed		1	ea.	\$ 5,743.00	110
SSPLR108T	SSP Recessed 8 Loop 1-1/4" SS Man. Large Pump Panel Top Feed		1	ea.	\$ 5,743.00	110
SSPLR110B	SSP Recessed 10 Loop 1-1/4" SS Man. Large Pump Panel Bot. Feed		1	ea.	\$ 5,981.00	110
SSPLR110T	SSP Recessed 10 Loop 1-1/4" SS Man. Large Pump Panel Top Feed		1	ea.	\$ 5,981.00	110
SSPLR112B	SSP Recessed 12 Loop 1-1/4" SS Man. Large Pump Panel Bot. Feed		1	ea.	\$ 6,235.00	110
SSPLR112T	SSP Recessed 12 Loop 1-1/4" SS Man. Large Pump Panel Top Feed		1	ea.	\$ 6,235.00	110
SSPLS104B	SSP SURF MNT 4 Loop 1-1/4" SS Man. Large Pump Panel Bot. Feed		1	ea.	\$ 5,080.00	110
SSPLS104T	SSP SURF MNT 4 Loop 1-1/4" SS Man. Large Pump Panel Top Feed		1	ea.	\$ 5,080.00	110
SSPLS106B	SSP SURF MNT 6 Loop 1-1/4" SS Man. Large Pump Panel Bot. Feed		1	ea.	\$ 5,251.00	110
SSPLS106T	SSP SURF MNT 6 Loop 1-1/4" SS Man. Large Pump Panel Top Feed		1	ea.	\$ 5,251.00	110
SSPLS108B	SSP SURF MNT 8 Loop 1-1/4" SS Man. Large Pump Panel Bot. Feed		1	ea.	\$ 5,743.00	110
SSPLS108T	SSP SURF MNT 8 Loop 1-1/4" SS Man. Large Pump Panel Top Feed		1	ea.	\$ 5,743.00	110
SSPLS110B	SSP SURF MNT 10 Loop 1-1/4" SS Man. Large Pump Panel Bot. Feed		1	ea.	\$ 5,981.00	110
SSPLS110T	SSP SURF MNT 10 Loop 1-1/4" SS Man. Large Pump Panel Top Feed		1	ea.	\$ 5,981.00	110
SSPLS112B	SSP SURF MNT 12 Loop 1-1/4" SS Man. Large Pump Panel Bot. Feed		1	ea.	\$ 6,235.00	110
SSPLS112T	SSP SURF MNT 12 Loop 1-1/4" SS Man. Large Pump Panel Top Feed		1	ea.	\$ 6,235.00	110
SSPLS204B	SSP SURF MNT 4 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed		1	ea.	\$ 4,966.00	110
SSPLS204T	SSP SURF MNT 4 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed		1	ea.	\$ 4,966.00	110
SSPLS206B	SSP SURF MNT 6 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed		1	ea.	\$ 5,165.00	110
SSPLS206T	SSP SURF MNT 6 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed		1	ea.	\$ 5,165.00	110
SSPLS208B	SSP SURF MNT 8 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed		1	ea.	\$ 5,641.00	110
SSPLS208T	SSP SURF MNT 8 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed		1	ea.	\$ 5,641.00	110
SSPLS210B	SSP SURF MNT 10 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed		1	ea.	\$ 5,864.00	110
SSPLS210T	SSP SURF MNT 10 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed		1	ea.	\$ 5,864.00	110

Stk#	Description	Status	Pkg Qty	Unit	List Price / Unit	Pg.
SSPLS212B	SSP SURF MNT 12 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed		1	ea.	\$ 6,106.00	110
SSPLS212T	SSP SURF MNT 12 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed		1	ea.	\$ 6,106.00	110
SSPSR104B	SSP Recessed 4 Loop 1-1/4" SS Manifold Small Pump Panel Bot. Feed		1	ea.	\$ 4,251.00	110
SSPSR104T	SSP Recessed 4 Loop 1-1/4" SS Manifold Small Pump Panel Top Feed		1	ea.	\$ 4,251.00	110
SSPSR106B	SSP Recessed 6 Loop 1-1/4" SS Manifold Small Pump Panel Bot. Feed		1	ea.	\$ 4,420.00	110
SSPSR106T	SSP Recessed 6 Loop 1-1/4" SS Manifold Small Pump Panel Top Feed		1	ea.	\$ 4,420.00	110
SSPSR108B	SSP Recessed 8 Loop 1-1/4" SS Manifold Small Pump Panel Bot. Feed		1	ea.	\$ 4,910.00	110
SSPSR108T	SSP Recessed 8 Loop 1-1/4" SS Manifold Small Pump Panel Top Feed		1	ea.	\$ 4,910.00	110
SSPSR110B	SSP Recessed 10 Loop 1-1/4" SS Manifold Small Pump Panel Bot. Feed		1	ea.	\$ 5,151.00	110
SSPSR110T	SSP Recessed 10 Loop 1-1/4" SS Manifold Small Pump Panel Top Feed		1	ea.	\$ 5,151.00	110
SSPSR112B	SSP Recessed 12 Loop 1-1/4" SS Manifold Small Pump Panel Bot. Feed		1	ea.	\$ 5,405.00	110
SSPSR112T	SSP Recessed 12 Loop 1-1/4" SS Manifold Small Pump Panel Top Feed		1	ea.	\$ 5,405.00	110
SSPSS104B	SSP SURF MNT 4 Loop 1-1/4" SS Man. Small Pump Panel Bot. Feed		1	ea.	\$ 4,251.00	110
SSPSS104T	SSP SURF MNT 4 Loop 1-1/4" SS Man. Small Pump Panel Top Feed		1	ea.	\$ 4,251.00	110
SSPSS106B	SSP SURF MNT 6 Loop 1-1/4" SS Man. Small Pump Panel Bot. Feed		1	ea.	\$ 4,420.00	110
SSPSS106T	SSP SURF MNT 6 Loop 1-1/4" SS Man. Small Pump Panel Top Feed		1	ea.	\$ 4,420.00	110
SSPSS108B	SSP SURF MNT 8 Loop 1-1/4" SS Man. Small Pump Panel Bot. Feed		1	ea.	\$ 4,910.00	110
SSPSS108T	SSP SURF MNT 8 Loop 1-1/4" SS Man. Small Pump Panel Top Feed		1	ea.	\$ 4,910.00	110
SSPSS110B	SSP SURF MNT 10 Loop 1-1/4" SS Man. Small Pump Panel Bot. Feed		1	ea.	\$ 5,151.00	110
SSPSS110T	SSP SURF MNT 10 Loop 1-1/4" SS Man. Small Pump Panel Top Feed		1	ea.	\$ 5,151.00	110
SSPSS112B	SSP SURF MNT 12 Loop 1-1/4" SS Man. Small Pump Panel Bot. Feed		1	ea.	\$ 5,405.00	110
SSPSS112T	SSP SURF MNT 12 Loop 1-1/4" SS Man. Small Pump Panel Top Feed		1	ea.	\$ 5,405.00	110
SSTLR104B	SST Recessed 4 Loop 1-1/4" SS Manifold Large Mixing Panel Bottom Feed		1	ea.	\$ 5,514.00	114
SSTLR104T	SST Recessed 4 Loop 1-1/4" SS Manifold Large Mixing Panel Top Feed		1	ea.	\$ 5,514.00	114
SSTLR106B	SST Recessed 6 Loop 1-1/4" SS Manifold Large Mixing Panel Bottom Feed		1	ea.	\$ 5,682.00	114
SSTLR106T	SST Recessed 6 Loop 1-1/4" SS Manifold Large Mixing Panel Top Feed		1	ea.	\$ 5,682.00	114
SSTLR108B	SST Recessed 8 Loop 1-1/4" SS Manifold Large Mixing Panel Bottom Feed		1	ea.	\$ 6,173.00	114
SSTLR108T	SST Recessed 8 Loop 1-1/4" SS Manifold Large Mixing Panel Top Feed		1	ea.	\$ 6,173.00	114
SSTLR110B	SST Recessed 10 Loop 1-1/4" SS Manifold Large Mixing Panel Bottom Feed		1	ea.	\$ 6,412.00	114
SSTLR110T	SST Recessed 10 Loop 1-1/4" SS Manifold Large Mixing Panel Top Feed		1	ea.	\$ 6,412.00	114
SSTLR112B	SST Recessed 12 Loop 1-1/4" SS Manifold Large Mixing Panel Bottom Feed		1	ea.	\$ 6,667.00	114
SSTLR112T	SST Recessed 12 Loop 1-1/4" SS Manifold Large Mixing Panel Top Feed		1	ea.	\$ 6,667.00	114
SSTLR204B	SST Recessed 4 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed		1	ea.	\$ 5,661.00	114
SSTLR204T	SST Recessed 4 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed		1	ea.	\$ 5,661.00	114
SSTLR206B	SST Recessed 6 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed		1	ea.	\$ 5,869.00	114
SSTLR206T	SST Recessed 6 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed		1	ea.	\$ 5,869.00	114
SSTLR208B	SST Recessed 8 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed		1	ea.	\$ 6,071.00	114
SSTLR208T	SST Recessed 8 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed		1	ea.	\$ 6,071.00	114
SSTLR210B	SST Recessed 10 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed		1	ea.	\$ 6,295.00	114
SSTLR210T	SST Recessed 10 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed		1	ea.	\$ 6,295.00	114
SSTLR212B	SST Recessed 12 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed		1	ea.	\$ 6,539.00	114
SSTLR212T	SST Recessed 12 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed		1	ea.	\$ 6,539.00	114
SSTLS104B	SST SURF MNT 4 Loop 1-1/4" SS Man. Large Mixing Panel Bot. Feed		1	ea.	\$ 5,514.00	114
SSTLS104T	SST SURF MNT 4 Loop 1-1/4" SS Man. Large Mixing Panel Top Feed		1	ea.	\$ 5,514.00	114
SSTLS106B	SST SURF MNT 6 Loop 1-1/4" SS Man. Large Mixing Panel Bot. Feed		1	ea.	\$ 5,682.00	114
SSTLS106T	SST SURF MNT 6 Loop 1-1/4" SS Man. Large Mixing Panel Top Feed		1	ea.	\$ 5,682.00	114
SSTLS108B	SST SURF MNT 8 Loop 1-1/4" SS Man. Large Mixing Panel Bot. Feed		1	ea.	\$ 6,173.00	114
SSTLS108T	SST SURF MNT 8 Loop 1-1/4" SS Man. Large Mixing Panel Top Feed		1	ea.	\$ 6,173.00	114
SSTLS110B	SST SURF MNT 10 Loop 1-1/4" SS Man. Large Mixing Panel Bot. Feed		1	ea.	\$ 6,412.00	114
SSTLS110T	SST SURF MNT 10 Loop 1-1/4" SS Man. Large Mixing Panel Top Feed		1	ea.	\$ 6,412.00	114
SSTLS112B	SST SURF MNT 12 Loop 1-1/4" SS Man. Large Mixing Panel Bot. Feed		1	ea.	\$ 6,667.00	114

Stk#	Description	Status	Pkg Qty	Unit	List Price / Unit	Pg.
SSTLS112T	SST SURF MNT 12 Loop 1-1/4" SS Man. Large Mixing Panel Top Feed		1	ea.	\$ 6,667.00	114
SSTLS204B	SST SURF MNT 4 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed		1	ea.	\$ 5,661.00	114
SSTLS204T	SST SURF MNT 4 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed		1	ea.	\$ 5,661.00	114
SSTLS206B	SST SURF MNT 6 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed		1	ea.	\$ 5,869.00	114
SSTLS206T	SST SURF MNT 6 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed		1	ea.	\$ 5,869.00	114
SSTLS208B	SST SURF MNT 8 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed		1	ea.	\$ 6,071.00	114
SSTLS208T	SST SURF MNT 8 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed		1	ea.	\$ 6,071.00	114
SSTLS210B	SST SURF MNT 10 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed		1	ea.	\$ 6,296.00	114
SSTLS210T	SST SURF MNT 10 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed		1	ea.	\$ 6,296.00	114
SSTLS212B	SST SURF MNT 12 Loop 1-1/4" High Flow SS Man. Large Pump Panel Bot. Feed		1	ea.	\$ 6,539.00	114
SSTLS212T	SST SURF MNT 12 Loop 1-1/4" High Flow SS Man. Large Pump Panel Top Feed		1	ea.	\$ 6,539.00	114
SSTSR104B	SST Recessed 4 Loop 1-1/4" SS Manifold Small Mixing Panel Bottom Feed		1	ea.	\$ 4,722.00	112
SSTSR104T	SST Recessed 4 Loop 1-1/4" SS Manifold Small Mixing Panel Top Feed		1	ea.	\$ 4,722.00	112
SSTSR106B	SST Recessed 6 Loop 1-1/4" SS Manifold Small Mixing Panel Bottom Feed		1	ea.	\$ 4,891.00	112
SSTSR106T	SST Recessed 6 Loop 1-1/4" SS Manifold Small Mixing Panel Top Feed		1	ea.	\$ 4,891.00	112
SSTSR108B	SST Recessed 8 Loop 1-1/4" SS Manifold Small Mixing Panel Bottom Feed		1	ea.	\$ 5,384.00	112
SSTSR108T	SST Recessed 8 Loop 1-1/4" SS Manifold Small Mixing Panel Top Feed		1	ea.	\$ 5,384.00	112
SSTSR110B	SST Recessed 10 Loop 1-1/4" SS Manifold Small Mixing Panel Bottom Feed		1	ea.	\$ 5,624.00	112
SSTSR110T	SST Recessed 10 Loop 1-1/4" SS Manifold Small Mixing Panel Top Feed		1	ea.	\$ 5,624.00	112
SSTSR112B	SST Recessed 12 Loop 1-1/4" SS Manifold Small Mixing Panel Bottom Feed		1	ea.	\$ 5,876.00	112
SSTSR112T	SST Recessed 12 Loop 1-1/4" SS Manifold Small Mixing Panel Top Feed		1	ea.	\$ 5,876.00	112
SSTSR204B	SST Recessed 4 Loop 1-1/4" High Flow SS Manifold Small Mixing Panel Bot. Feed		1	ea.	\$ 4,869.00	112
SSTSR204T	SST Recessed 4 Loop 1-1/4" High Flow SS Manifold Small Mixing Panel Top Feed		1	ea.	\$ 4,869.00	112
SSTSS104B	SST SURF MNT 4 Loop 1-1/4" SS Man. Small Mixing Panel Bot. Feed		1	ea.	\$ 4,722.00	112
SSTSS104T	SST SURF MNT 4 Loop 1-1/4" SS Man. Small Mixing Panel Top Feed		1	ea.	\$ 4,722.00	112
SSTSS106B	SST SURF MNT 6 Loop 1-1/4" SS Man. Small Mixing Panel Bot. Feed		1	ea.	\$ 4,891.00	112
SSTSS106T	SST SURF MNT 6 Loop 1-1/4" SS Man. Small Mixing Panel Top Feed		1	ea.	\$ 4,891.00	112
SSTSS108B	SST SURF MNT 8 Loop 1-1/4" SS Man. Small Mixing Panel Bot. Feed		1	ea.	\$ 5,384.00	112
SSTSS108T	SST SURF MNT 8 Loop 1-1/4" SS Man. Small Mixing Panel Top Feed		1	ea.	\$ 5,384.00	112
SSTSS110B	SST SURF MNT 10 Loop 1-1/4" SS Man. Small Mixing Panel Bot. Feed		1	ea.	\$ 5,624.00	112
SSTSS110T	SST SURF MNT 10 Loop 1-1/4" SS Man. Small Mixing Panel Top Feed		1	ea.	\$ 5,624.00	112
SSTSS112B	SST SURF MNT 12 Loop 1-1/4" SS Man. Small Mixing Panel Bot. Feed		1	ea.	\$ 5,876.00	112
SSTSS112T	SST SURF MNT 12 Loop 1-1/4" SS Man. Small Mixing Panel Top Feed		1	ea.	\$ 5,876.00	112
SSTSS204B	SST SURF MNT 4 Loop 1-1/4" High Flow SS Manifold Small Mixing Panel Bot. Feed		1	ea.	\$ 4,869.00	112
SSTSS204T	SST SURF MNT 4 Loop 1-1/4" High Flow SS Manifold Small Mixing Panel Top Feed		1	ea.	\$ 4,869.00	112
TFT01	TFT01 Boiler Panel 3 Pump		1	ea.	\$ 4,040.00	92
TFT02	TFT02 High Capacity Boiler 4 Pump		1	ea.	\$ 4,656.00	92
TMP040	TMP 40MBH 3-Way Mixing Panel		1	ea.	\$ 2,860.00	96
TMP070	TMP 70MBH 3-Way Mixing Panel		1	ea.	\$ 3,166.00	96
TMP070RS	TMP 70MBH 3-Way Mixing Panel (Automatic Outdoor Reset)		1	ea.	\$ 6,084.00	98
TMP070Z	TMP 70MBH 3-Way Mixing Panel with Zoning		1	ea.	\$ 4,436.00	97
TMP085DP	TMP 85MBH Dual Pump 3-Way Mixing panel		1	ea.	\$ 4,635.00	99
TMP-MW1P0DSS	TMP-MULTI, PrimaryNone, DHW, LowTmp/SmTMV-2		1	ea.	\$ 6,662.00	101
TMP-MW1P2DSS	TMP-MULTI, Primary26-99, DHW, LowTmp/SmTMV-2		1	ea.	\$ 8,352.00	101
TMP-MW1P0DHSS	TMP-MULTI, PrimaryNone, DHW, HiTmp-1, LowTmp/SmTMV-2		1	ea.	\$ 7,777.00	101
TMP-MW1P2DHSS	TMP-MULTI, Primary26-99, DHW, HiTmp-1, LowTmp/SmTMV-2		1	ea.	\$ 9,467.00	101
TWH070P	TWH 70MBH Tankless Water Heater Mixing Panel (DHW Priority Opt)		1	ea.	\$ 4,396.00	102
TWH070XP	TWH 70MBH HH Tankless Water Heater Mixing Panel (DHW Priority Opt)		1	ea.	\$ 6,322.00	102
TWH070XPZ	TWH 70MBH High Head Tankless Water Heater Mixing Panel with Zoning		1	ea.	\$ 7,021.00	103
TWH070Z	TWH 70MBH Tankless Water Heater Mixing Panel with Zoning		1	ea.	\$ 4,996.00	103
V101	V100 Boiler Panel 1 Htg 1 DHW		1	ea.	\$ 4,231.00	89



www.heatlink.com

Listing by Stk#
USA – September 16, 2022


Stk#	Description	Status	Pkg Qty	Unit	List Price / Unit	Pg.
V102	V100 Boiler Panel 2 Htg 1 DHW		1	ea.	\$ 5,017.00	89
V103	V100 Boiler Panel 3 Htg		1	ea.	\$ 5,017.00	89

New Products :

Stk#	Description	Pg.
23305NL	½" PEX F1807 No Lead Brass Ball Valve, Full Port	28
23322NL	¾" PEX F1807 No Lead Brass Ball Valve, Full Port	28
23328NL	1" PEX F1807 No Lead Brass Ball Valve, Full Port	28
23335NL	1-¼" PEX F1807 No Lead Brass Ball Valve, Full Port	28
23341NL	1-½" PEX F1807 No Lead Brass Ball Valve, Full Port	28
23354NL	2" PEX F1807 No Lead Brass Ball Valve, Full Port	28
23822NL	¾" PEX F1807 × ¾" MNPT No Lead Brass Ball Valve	28
58200.1	Metal Drive Sleeve for 58200/58300 Mixing Valve Motor	143
94019400	¾" 400ft O ₂ Barrier HeatLink® UV Stabilized PEX-a Tubing	41
EX23305NL	½" PEX F1960 No Lead Brass Ball Valve, Full Port	40
EX23322NL	¾" PEX F1960 No Lead Brass Ball Valve, Full Port	40
EX23328NL	1" PEX F1960 No Lead Brass Ball Valve, Full Port	40
EX23335NL	1-¼" PEX F1960 No Lead Brass Ball Valve, Full Port	40
EX23341NL	1-½" PEX F1960 No Lead Brass Ball Valve, Full Port	40
EX23354NL	2" PEX F1960 No Lead Brass Ball Valve, Full Port	40
EX23822NL	¾" PEX F1960 × ¾" MNPT No Lead Brass Ball Valve	40
EX27241NL	1-¼" PEX F1960 × 1-¼" F/Sweat No Lead Brass Adapter	37
EX27254NL	2" PEX F1960 × 2" F/Sweat No Lead Brass Adapter	37

Discontinued Products :

Stk#	Description	Substitute
11435.1	Replacement Blade Kit for #11435	
11435.2	Rebuild Kit for #11435	
11435.5	1" SS Collars (Set) for #11435	
13806	6 Port Single Row, 1" PEX × Closed End HPP Multiport Tee	
26322NL	1-¼" × ¾" × ¾" PEX No Lead Brass Tee	26382NL
27641NL	1-½" PEX × 1-½" FNPT No Lead Brass Adapter	27541NL
23422NL	¾" PEX × ¾" MNPT No Lead Straight Ball Valve	23822NL
40226	StatLink® 6 Zone Base Module	40318
64181	3" × 4-Way Flange Mixing Valve	
PLINTR20VA	24Vac 20VA Plug-In Transformer for Panels	PLINTR40VA

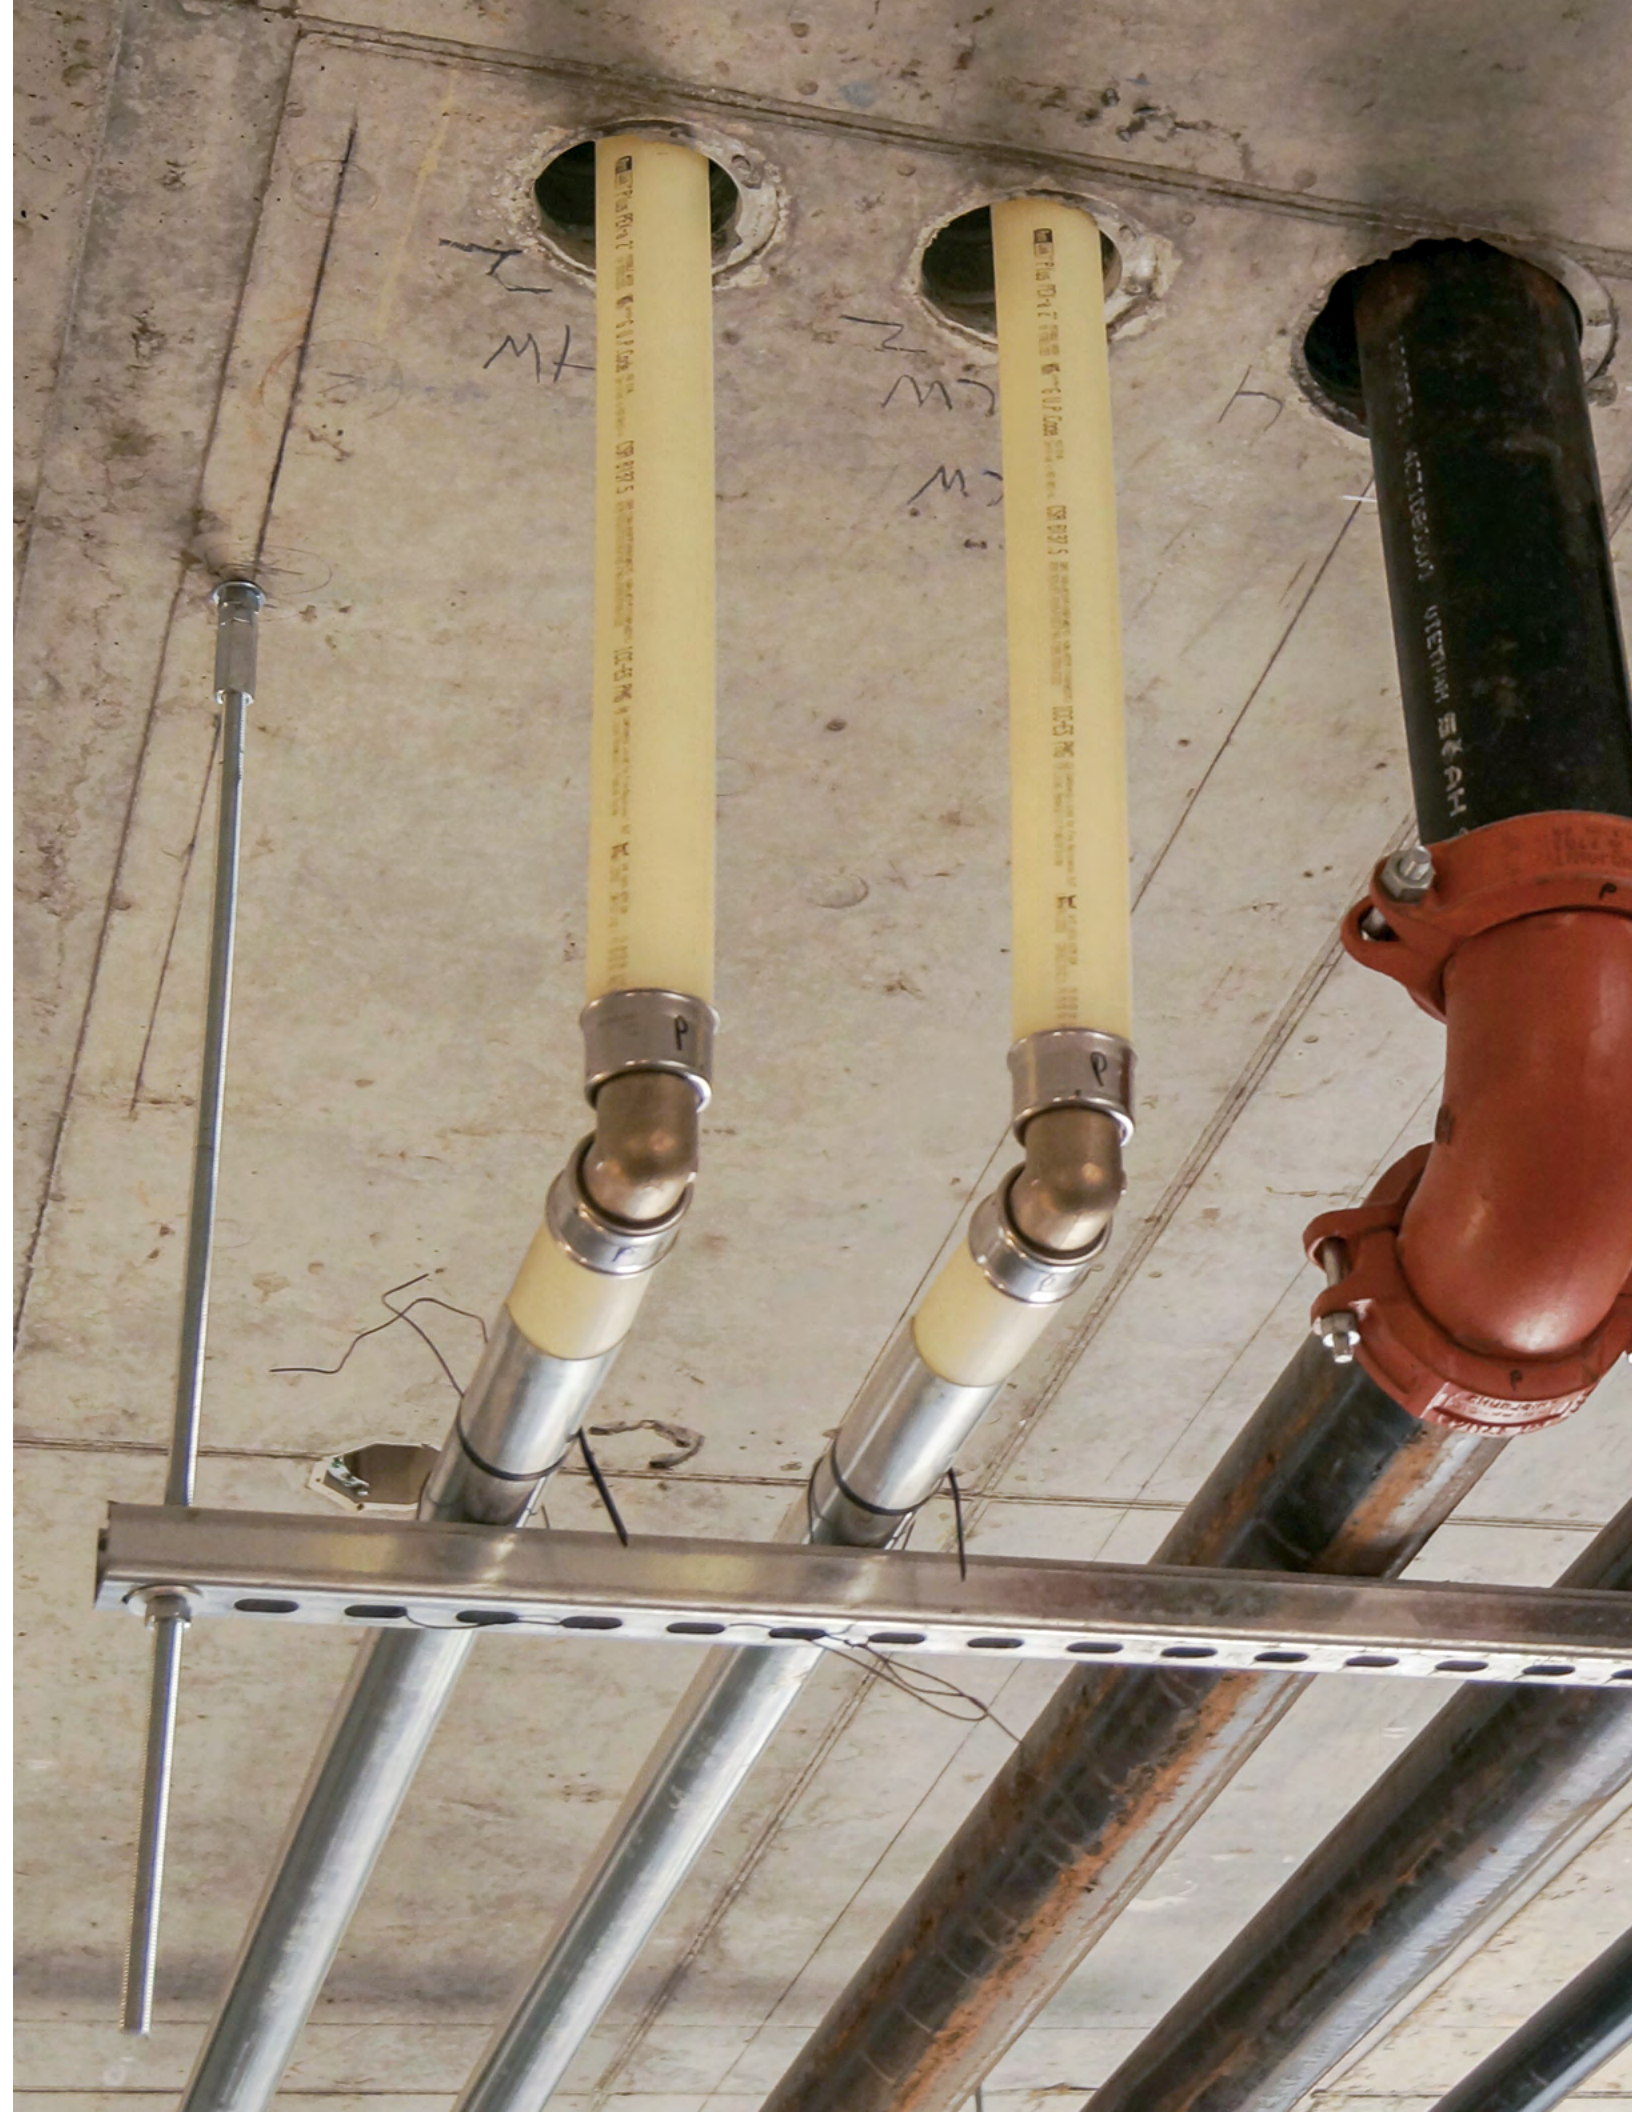



Toll Free: 1-800-323-1545
Fax: 1-888-800-8114

orders@heatlinkgroupusa.com
csr@heatlinkgroupusa.com
www.heatlink.com

Please check our website to ensure you have
the latest version of this catalog.

*HeatLink, DryAbove, DryBelow, EasyFit, EndBend, PexCube, PureLink, and SpacerClip are either registered
trademarks or trademarks of HeatLink Group Inc.*