

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

### Description

Open on both ends with 3/4" PEX insert connections. 1/2" branches in single row.

### Technical Data

Material:..... Modified Polyphenylsulfone  
 Operating Pressure Rating:..... 180°F @ 100 psi (82.2°C @ 0.69 MPa)

### Listings

ICC-ES PMG 1087  
 cNSFus-pw  
 cQAlus P371

### Standards

ASTM E84  
 ASTM F877  
 ASTM F2159  
 CSA B137.5  
 NSF/ANSI 14  
 NSF/ANSI 61  
 NSF/ANSI 372  
 ULC S102.2

### Codes

IMC  
 IPC  
 IRC  
 NPC of Canada  
 NSPC  
 UMC  
 UPC


Qty	Stk. #	# of ports	Inlet	Outlet	Dimensions		Weight
					A	B	
	14202M	2	3/4"	3/4"	3.916" (99.5 mm)	2.508" (63.7 mm)	0.039 lb (0.018 kg)
	14203M	3	3/4"	3/4"	5.665" (143.9 mm)	4.257" (108.1 mm)	0.058 lb (0.026 kg)
	14204M	4	3/4"	3/4"	7.415" (188.3 mm)	6.007" (152.6 mm)	0.076 lb (0.035 kg)

### Installation

Installation must follow all of HeatLink's instructions and guidelines.

### Related Documents

- PEX-a Potable Water Press System Installation Guide (L3235)
- HeatLink Limited Plumbing Warranty

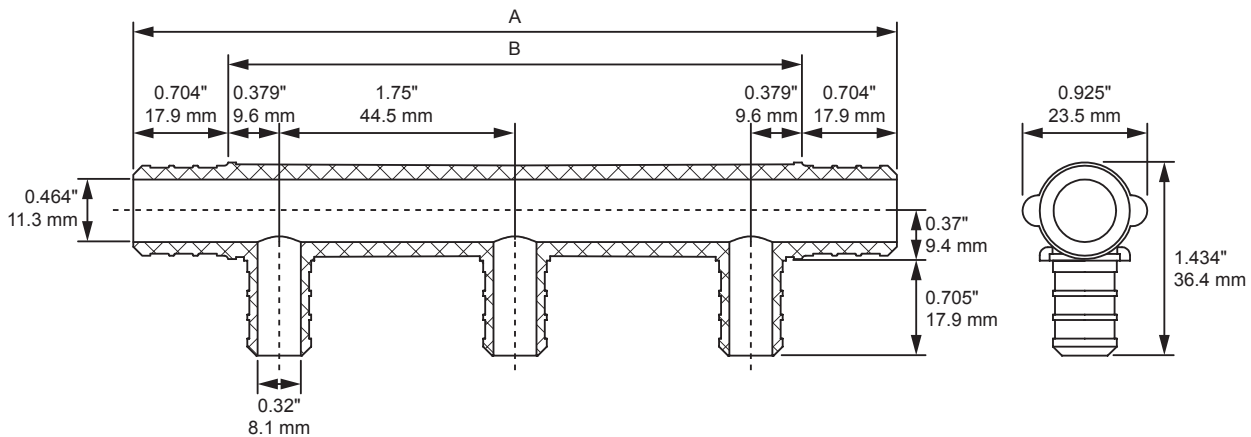

*This page is intentionally blank.*